

## Long-distance Detection Prevents Unexpected Facility Stoppages

- Exceptional sensing distance\*<sup>1</sup>. Nearly double the sensing distance of previous models.
- With high-brightness LED, indicator is visible 360° around.
- Only 10 seconds\*<sup>2</sup> to replace a Proximity Sensor with Quick fix (Mounting Sleeve).
- Cables with enhanced oil resistance have 2-year oil resistance\*<sup>3</sup>.
- IP69K compliant for water resistance and wash resistance.\*<sup>4</sup>
- UL certification (UL60947-5-2) and CSA certification (CSA C22.2 UL60947-5-2-14)



\*1. Based on July 2017 OMRON investigation.  
 \*2. Time required to adjust the distance when installing a Sensor. Based on OMRON investigation.  
 \*3. Refer to page 6 and 8 for details. However, E2EQ series is excluded.  
 \*4. E2EQ series is excluded.

Got questions about connecting a 2-wire sensor to your system?  
 Call the sensor experts at Ramco today!  
 Email us at [iainside@ramcoi.com](mailto:iainside@ramcoi.com)

Be sure to read Safety Precautions on page 15.

## E2E/E2EQ NEXT Series Model Number Legend

### DC 2-wire

E2E (1) - X (2) (3) D (4) (5) (6) - (7) - (8) (9) - (10) (11)

| No.  | Classification                               | Code     | Meaning   |
|------|--|----------|---|
| (1)  | Case   | Blank    | Without spatter-resistant coating   |
|      |  | Q        | With spatter-resistant coating  |
| (2)  | Sensing distance                             | Number   | Sensing distance (Unit: mm) (R: Indication of decimal point)                                  |
| (3)  | Shielding                                    | Blank    | Shielded Models   |
|      |  | M        | Unshielded Models   |
| (4)  | Operation mode                               | 1        | Normally open (NO)  |
|      |  | 2        | Normally closed (NC)  |
| (5)  | Body size                                    | Blank    | Standard  |
|      |  | L        | Long Body   |
| (6)  | Size (Omitted for the Single distance type.) | 8        | M8  |
|      |  | 12       | M12   |
|      |  | 18       | M18   |
|      |  | 30       | M30   |
| (7)  | Connecting method                            | Blank    | Pre-wired Models  |
|      |  | M1TGJ    | M12 Pre-wired Smartclick Connector Models pigtail   |
|      |  | M1TGJR   | M12 Pre-wired Smartclick Connector Models (Robot (bending-resistant) PVC cable) robot pigtail |
| (8)  | Polarity                                     | Blank    | Polarity  |
|      |  | T        | No polarity   |
| (9)  | Cable specifications *                       | Blank    | Standard PVC cable  |
|      |  | R        | Robot (bending-resistant) PVC cable   |
| (10) | New model                                    | Blank    | Other than Single distance model (Pre-wired Models)   |
|      |  | N        | Single distance model (Applicable only to Pre-wired Models)                                   |
| (11) | Cable length                                 | Number M | Cable length  |

\* (9) is only shown in the model number of Pre-wired Models.

**Note:** 1. The purpose of this model number legend is to provide understanding of the meaning of specifications from the model number. Models are not available for all combinations of code numbers.

2. Size description of the number 7 is not included in the Single-distance type.

# E2E/E2EQ NEXT Series

## Ordering Information

### Sensors

E2E NEXT Series (Triple distance model)

DC 2-wire [Refer to *Dimensions* on page 18.]

Shielded Models \*1

| Size<br>(Sensing distance) | Connection method                                | Polarity | Model                    |                          |
|----------------------------|--|----------|--------------------------|--------------------------|
|                            |  |          | Operation mode: NO       | Operation mode: NC       |
| M8<br>(3 mm)               | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X3D18 2M             | E2E-X3D28 2M             |
|                            |  | No       | E2E-X3D18-T 2M           | E2E-X3D28-T 2M           |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X3D18-M1TGJ 0.3M     | E2E-X3D28-M1TGJ 0.3M     |
|                            |  | No       | E2E-X3D18-M1TGJ-T 0.3M   | E2E-X3D28-M1TGJ-T 0.3M   |
| M12<br>(7 mm)              | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X7D112 2M            | E2E-X7D212 2M            |
|                            |  | No       | E2E-X7D112-T 2M          | E2E-X7D212-T 2M          |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X7D112-M1TGJ 0.3M    | E2E-X7D212-M1TGJ 0.3M    |
|                            |  | No       | E2E-X7D112-M1TGJ-T 0.3M  | E2E-X7D212-M1TGJ-T 0.3M  |
| M18<br>(11 mm)             | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X11D118 2M           | E2E-X11D218 2M           |
|                            |  | No       | E2E-X11D118-T 2M         | E2E-X11D218-T 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X11D118-M1TGJ 0.3M   | E2E-X11D218-M1TGJ 0.3M   |
|                            |  | No       | E2E-X11D118-M1TGJ-T 0.3M | E2E-X11D218-M1TGJ-T 0.3M |
| M30<br>(20 mm)             | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X20D130 2M           | E2E-X20D230 2M           |
|                            |  | No       | E2E-X20D130-T 2M         | E2E-X20D230-T 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X20D130-M1TGJ 0.3M   | E2E-X20D230-M1TGJ 0.3M   |
|                            |  | No       | E2E-X20D130-M1TGJ-T 0.3M | E2E-X20D230-M1TGJ-T 0.3M |

### Unshielded Models

| Size<br>(Sensing distance) | Connection method                                | Polarity | Model                      |                            |
|----------------------------|--|----------|----------------------------|----------------------------|
|                            |  |          | Operation mode: NO         | Operation mode: NC         |
| M8<br>(6 mm)               | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X6MD18 2M              | E2E-X6MD28 2M              |
|                            |  | No       | E2E-X6MD18-T 2M            | E2E-X6MD28-T 2M            |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X6MD18-M1TGJ 0.3M      | E2E-X6MD28-M1TGJ 0.3M      |
|                            |  | No       | E2E-X6MD18-M1TGJ-T 0.3M    | E2E-X6MD28-M1TGJ-T 0.3M    |
| M12<br>(10 mm)             | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X10MD112 2M            | E2E-X10MD212 2M            |
|                            |  | No       | E2E-X10MD112-T 2M          | E2E-X10MD212-T 2M          |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X10MD112-M1TGJ 0.3M    | E2E-X10MD212-M1TGJ 0.3M    |
|                            |  | No       | E2E-X10MD112-M1TGJ-T 0.3M  | E2E-X10MD212-M1TGJ-T 0.3M  |
| M18<br>(20 mm)             | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X20MD1L18 2M           | E2E-X20MD2L18 2M           |
|                            |  | No       | E2E-X20MD1L18-T 2M         | E2E-X20MD2L18-T 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X20MD1L18-M1TGJ 0.3M   | E2E-X20MD2L18-M1TGJ 0.3M   |
|                            |  | No       | E2E-X20MD1L18-M1TGJ-T 0.3M | E2E-X20MD2L18-M1TGJ-T 0.3M |
| M30<br>(40 mm)             | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X40MD1L30 2M           | E2E-X40MD2L30 2M           |
|                            |  | No       | E2E-X40MD1L30-T 2M         | E2E-X40MD2L30-T 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X40MD1L30-M1TGJ 0.3M   | E2E-X40MD2L30-M1TGJ 0.3M   |
|                            |  | No       | E2E-X40MD1L30-M1TGJ-T 0.3M | E2E-X40MD2L30-M1TGJ-T 0.3M |

\*1. When embedding the Proximity Sensor in metal, refer to *Influence of Surrounding Metal* on page 16.

\*2. Models with 5-m cable length are also available with "5M" suffix. (Example: E2E-X3D18 5M)

\*3. Models with 2-m and 5-m robot (bending-resistant) cables are also available with "-R" in the model number. (Example: E2E-X3D18-R 2M/E2E-X3D18-R 5M)

\*4. Models with M12 Pre-wired Smartclick Connectors and robot (bending-resistant) cables are also available with "R" in the model number. (Example: E2E-X3D18-M1TGJR 0.3M/E2E-X3D18-M1TGJR-T 0.3M)

## Sensors

### E2EQ NEXT Series (Spatter-resistant Triple distance model)

DC 2-wire [Refer to *Dimensions* on page 21.]

#### Shielded Models \*1

| Size<br>(Sensing distance) | Connection method                             | Polarity | Model                     |                           |
|----------------------------|---|----------|---------------------------|---------------------------|
|                            |   |          | Operation mode: NO        | Operation mode: NC        |
| M8<br>(3 mm)               | Pre-wired (2 m) *2                            | Yes      | E2EQ-X3D18 2M             | E2EQ-X3D28 2M             |
|                            |   | No       | E2EQ-X3D18-T 2M           | E2EQ-X3D28-T 2M           |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) | Yes      | E2EQ-X3D18-M1TGJ 0.3M     | E2EQ-X3D28-M1TGJ 0.3M     |
|                            |   | No       | E2EQ-X3D18-M1TGJ-T 0.3M   | E2EQ-X3D28-M1TGJ-T 0.3M   |
| M12<br>(7 mm)              | Pre-wired (2 m) *2                            | Yes      | E2EQ-X7D112 2M            | E2EQ-X7D212 2M            |
|                            |   | No       | E2EQ-X7D112-T 2M          | E2EQ-X7D212-T 2M          |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) | Yes      | E2EQ-X7D112-M1TGJ 0.3M    | E2EQ-X7D212-M1TGJ 0.3M    |
|                            |   | No       | E2EQ-X7D112-M1TGJ-T 0.3M  | E2EQ-X7D212-M1TGJ-T 0.3M  |
| M18<br>(11 mm)             | Pre-wired (2 m) *2                            | Yes      | E2EQ-X11D118 2M           | E2EQ-X11D218 2M           |
|                            |   | No       | E2EQ-X11D118-T 2M         | E2EQ-X11D218-T 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) | Yes      | E2EQ-X11D118-M1TGJ 0.3M   | E2EQ-X11D218-M1TGJ 0.3M   |
|                            |   | No       | E2EQ-X11D118-M1TGJ-T 0.3M | E2EQ-X11D218-M1TGJ-T 0.3M |
| M30<br>(20 mm)             | Pre-wired (2 m) *2                            | Yes      | E2EQ-X20D130 2M           | E2EQ-X20D230 2M           |
|                            |   | No       | E2EQ-X20D130-T 2M         | E2EQ-X20D230-T 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) | Yes      | E2EQ-X20D130-M1TGJ 0.3M   | E2EQ-X20D230-M1TGJ 0.3M   |
|                            |   | No       | E2EQ-X20D130-M1TGJ-T 0.3M | E2EQ-X20D230-M1TGJ-T 0.3M |

\*1. When embedding the Proximity Sensor in metal, refer to *Influence of Surrounding Metal* on page 16.

\*2. Models with 5-m cable length are also available with "5M" suffix. (Example: E2EQ-X3D18 5M)

### E2E NEXT Series (Single distance model)

DC 2-wire [Refer to *Dimensions* on page 22.]

#### Shielded Models

| Size<br>(Sensing distance) | Connection method                                | Polarity | Model                   |                         |
|----------------------------|--|----------|-------------------------|-------------------------|
|                            |  |          | Operation mode: NO      | Operation mode: NC      |
| M8<br>(1.5 mm)             | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X1R5D1-N 2M         | E2E-X1R5D2-N 2M         |
|                            |  | No       | E2E-X1R5D1-T-N 2M       | E2E-X1R5D2-T-N 2M       |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X1R5D1-M1TGJ 0.3M   | E2E-X1R5D2-M1TGJ 0.3M   |
|                            |  | No       | E2E-X1R5D1-M1TGJ-T 0.3M | E2E-X1R5D2-M1TGJ-T 0.3M |
| M12<br>(2.5 mm)            | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X2R5D1-N 2M         | E2E-X2R5D2-N 2M         |
|                            |  | No       | E2E-X2R5D1-T-N 2M       | E2E-X2R5D2-T-N 2M       |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X2R5D1-M1TGJ 0.3M   | E2E-X2R5D2-M1TGJ 0.3M   |
|                            |  | No       | E2E-X2R5D1-M1TGJ-T 0.3M | E2E-X2R5D2-M1TGJ-T 0.3M |
| M18<br>(5 mm)              | Pre-wired (2 m) *2 *3                            | Yes      | E2E-X5D1-N 2M           | E2E-X5D2-N 2M           |
|                            |  | No       | E2E-X5D1-T-N 2M         | E2E-X5D2-T-N 2M         |
|                            | M12 Pre-wired<br>Smartclick Connector (0.3 m) *4 | Yes      | E2E-X5D1-M1TGJ 0.3M     | E2E-X5D2-M1TGJ 0.3M     |
|                            |  | No       | E2E-X5D1-M1TGJ-T 0.3M   | E2E-X5D2-M1TGJ-T 0.3M   |

\*1. Models with 5-m cable length are also available with "5M" suffix. (Example: E2E-X1R5D1-N 5M)

\*2. Models with 2-m and 5-m robot (bending-resistant) cables are also available with "-R" in the model number. (Example: E2E-X1R5D1-R-N 2M/E2E-X1R5D1-R-N 5M)


\*3. Models with M12 Smartclick connector model robot (bending-resistant) cables are also available with "R" in the model number. (Example: E2E-X1R5D1-M1TGJR 0.3M/E2E-X1R5D1-M1TGJR-T 0.3M)

# E2E/E2EQ NEXT Series

## Accessories (Sold Separately)



### Sensor I/O Connectors

(Models for Pre-wired Connectors) A Sensor I/O Connector is not provided with the Sensor. It must be ordered separately as required.  
**Round Oil-resistant Connectors XS5 NEXT series**

| Appearance  | Cable Specification           | Type                          | Cable diameter (mm) | Cable Connection Direction            | Cable length (m) | Sensor I/O Connector model number | Applicable Proximity Sensor model number     |
|---|-------------------------------|-------------------------------|---------------------|---------------------------------------|------------------|-----------------------------------|--|
|  <p>M12 Smartclick Connector<br/>Straight type</p> | Oil-resistant PVC cable       | Sockets on One Cable End      | 6 dia.              | Straight                              | 1                | XS5F-D421-C80-X                   | E2E-X□D□-M1TGJ(R)(-T)<br>E2EQ-X□D□-M1TGJ(-T) |
|   |                               |                               |                     |                                       | 2                | XS5F-D421-D80-X                   |  |
|   |                               |                               |                     |                                       | 3                | XS5F-D421-E80-X                   |  |
|   |                               |                               |                     |                                       | 5                | XS5F-D421-G80-X                   |  |
|   |                               |                               |                     |                                       | 10               | XS5F-D421-J80-X                   |  |
|   | Oil-resistant PVC robot cable | Sockets on One Cable End      | 6 dia.              | Straight                              | 1                | XS5F-D421-C80-XR                  |  |
|   |                               |                               |                     |                                       | 2                | XS5F-D421-D80-XR                  |  |
|   |                               |                               |                     |                                       | 3                | XS5F-D421-E80-XR                  |  |
|   |                               |                               |                     |                                       | 5                | XS5F-D421-G80-XR                  |  |
|   |                               |                               |                     |                                       | 10               | XS5F-D421-J80-XR                  |  |
|   | Oil-resistant PVC cable       | Socket and Plug on Cable Ends | 6 dia.              | Straight (Socket)/<br>Straight (Plug) | 1                | XS5W-D421-C81-X                   |  |
|   |                               |                               |                     |                                       | 2                | XS5W-D421-D81-X                   |  |
|   |                               |                               |                     |                                       | 3                | XS5W-D421-E81-X                   |  |
|   |                               |                               |                     |                                       | 5                | XS5W-D421-G81-X                   |  |
|   | Oil-resistant PVC robot cable | Socket and Plug on Cable Ends | 6 dia.              | Straight (Socket)/<br>Straight (Plug) | 1                | XS5W-D421-C81-XR                  |  |
|   |                               |                               |                     |                                       | 2                | XS5W-D421-D81-XR                  |  |
|   |                               |                               |                     |                                       | 3                | XS5W-D421-E81-XR                  |  |
|   |                               |                               |                     |                                       | 5                | XS5W-D421-G81-XR                  |  |
| 10  |                               |                               |                     |                                       | XS5W-D421-J81-XR |                                   |  |

**Note:** For details of the connector, refer to XS5 NEXT Series on page 87.

### Round Water-resistant Connectors XS5 series

| Appearance   | Cable Specification                         | Type                                     | Cable diameter (mm) | Cable Connection Direction    | Cable length (m)              | Sensor I/O Connector model number | Applicable Proximity Sensor model number     |                                       |   |                 |
|--|---|--|---------------------|-------------------------------|-------------------------------|-----------------------------------|--|---------------------------------------|---|-----------------|
|  <p>M12 Smartclick Connector<br/>Straight type</p><br> <p>Right-angle type</p> | PVC robot cable                             | Sockets on One Cable End                 | 6 dia.              | Straight                      | 1                             | XS5F-D421-C80-F                   | E2E-X□D□-M1TGJ(R)(-T)<br>E2EQ-X□D□-M1TGJ(-T) |                                       |   |                 |
|  |   |  |                     |                               | 2                             | XS5F-D421-D80-F                   |  |                                       |   |                 |
|  |   |  |                     |                               | 3                             | XS5F-D421-E80-F                   |  |                                       |   |                 |
|  |   |  |                     |                               | 5                             | XS5F-D421-G80-F                   |  |                                       |   |                 |
|  |   |  |                     |                               | 10                            | XS5F-D421-J80-F                   |  |                                       |   |                 |
|  |   |  |                     | Oil-resistant PVC robot cable | Socket and Plug on Cable Ends | 6 dia.                            |  | Right-angle                           | 1 | XS5F-D422-C80-F |
|  |   |  |                     |                               |                               |                                   |  |                                       | 2 | XS5F-D422-D80-F |
|  |   |  |                     |                               |                               |                                   |  |                                       | 3 | XS5F-D422-E80-F |
|  |   |  |                     |                               |                               |                                   |  |                                       | 5 | XS5F-D422-G80-F |
|  |   |  |                     |                               |                               |                                   |  | Straight (Socket)/<br>Straight (Plug) | 1 | XS5W-D421-C81-F |
|  | 2   | XS5W-D421-D81-F                          |                     |                               |                               |                                   |  |                                       |   |                 |
|  | 3   | XS5W-D421-E81-F                          |                     |                               |                               |                                   |  |                                       |   |                 |
|  | 5   | XS5W-D421-G81-F                          |                     |                               |                               |                                   |  |                                       |   |                 |
|  | Right-angle (Socket)/<br>Right-angle (Plug) | 2  | XS5W-D422-D81-F     |                               |                               |                                   |  |                                       |   |                 |
|  |   | 5  | XS5W-D422-G81-F     |                               |                               |                                   |  |                                       |   |                 |
|  |   | Straight (Socket)/<br>Right-angle (Plug) | 2                   | XS5W-D423-D81-F               |                               |                                   |  |                                       |   |                 |
|  |   |  | 5                   | XS5W-D423-G81-F               |                               |                                   |  |                                       |   |                 |
|  | Right-angle (Socket)/<br>Straight (Plug)    | 2  | XS5W-D424-D81-F     |                               |                               |                                   |  |                                       |   |                 |
| 5  |   | XS5W-D424-G81-F                          |                     |                               |                               |                                   |  |                                       |   |                 |

**Note:** For details of the connector, refer to XS5 Series on page 94.

## Sensor I/O Connectors Oil resistance performance of mating combination


| E2E NEXT Series<br>Pre-wired Connector Models | Applicable connector Model |                        |
|---|----------------------------|------------------------|
|   | XS5 NEXT series            | XS5 series             |
| E2E-X□D□-M1TGJ(R)(-T)                         | 2 years of oil resistance* | Water-resistant (IP67) |

\* Applicable cutting oil type: specified in JIS K 2241:2000

2 years of oil resistance indicates the median value of the product design and the oil-resistance performance criterion result (=Typical value).  
Products to be shipped will have approximately 2 years of oil resistance, but will vary depending on the product.

### Quick fix (Mounting Sleeves) [Refer to Dimensions on page 23.]

A Mounting Bracket is not provided with the Sensor. It must be ordered separately as required.

| Appearance  | Model       | Applicable Sensors            |
|---|-------------|-------------------------------|
|  | Y92E-J8S12  | E2E NEXT M8 Shielded Sensors  |
|   | Y92E-J12S18 | E2E NEXT M12 Shielded Sensors |
|   | Y92E-J18S30 | E2E NEXT M18 Shielded Sensors |

**Note:** Not applicable for E2EQ NEXT Series (spatter-resistant) models.

# E2E/E2EQ NEXT Series

## Ratings and Specifications

### E2E NEXT Series (Triple distance model) DC 2-wire

| Item                                      | Size                              |   | M8  |                          | M12                     |                         | M18   |                         | M30   |                           |   |  |               |  |
|---|-----------------------------------|---|---|--------------------------|-------------------------|-------------------------|---|-------------------------|---|---------------------------|---|--|---------------|--|
|   | Shielded                          | Model   | Shielded  | Unshielded               | Shielded                | Unshielded              | Shielded  | Unshielded              | Shielded  | Unshielded                |   |  |               |  |
|   |                                   |   | E2E-X3D□  | E2E-X6MD□                | E2E-X7D□                | E2E-X10MD□              | E2E-X11D□   | E2E-X20MD□              | E2E-X20D□   | E2E-X40MD□                |   |  |               |  |
| <b>Sensing distance</b>                   |                                   |   | 3 mm ±10%   | 6 mm ±10%                | 7 mm ±10%               | 10 mm ±10%              | 11 mm ±10%  | 20 mm ±10%              | 20 mm ±10%  | 40 mm ±10%                |   |  |               |  |
| <b>Setting distance *1</b>                |                                   |   | 0 to 2.4 mm   | 0 to 4.8 mm              | 0 to 5.6 mm             | 0 to 8 mm               | 0 to 8.8 mm   | 0 to 16 mm              | 0 to 16 mm  | 0 to 32 mm                |   |  |               |  |
| <b>Differential travel</b>                |                                   |   | 15% max. of sensing distance  |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Detectable object</b>                  |                                   |   | Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 9.)  |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Standard sensing object</b>            |                                   |   | Iron,<br>9 × 9 × 1 mm   | Iron,<br>18 × 18 × 1 mm  | Iron,<br>21 × 21 × 1 mm | Iron,<br>30 × 30 × 1 mm | Iron,<br>33 × 33 × 1 mm   | Iron,<br>60 × 60 × 1 mm | Iron,<br>60 × 60 × 1 mm   | Iron,<br>120 × 120 × 1 mm |   |  |               |  |
| <b>Response frequency *2</b>              |                                   |   | 350 Hz  | 250 Hz                   | 350 Hz                  | 200 Hz                  | 250 Hz  | 200 Hz                  | 200 Hz  | 50 Hz                     |   |  |               |  |
| <b>Power supply voltage</b>               |                                   |   | 10 to 30 VDC, (including 10% ripple (p-p))  |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Leakage current</b>                    |                                   |   | 0.8 mA max.   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Control output</b>                     | <b>Load current</b>               | 3 to 100 mA   |   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
|   | <b>Residual voltage</b>           | Polarity: 3 V max. (Load current: 100 mA, Cable length: 2 m)<br>No polarity: 5 V max. (Load current: 100 mA, Cable length: 2 m) |   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Indicator</b>                          |                                   |   | D1 Models: Operation indicator (orange), Setting indicator (green)<br>D2 Models: Operation indicator (orange)   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Operation mode</b>                     |                                   |   | D1 Models: NO<br>D2 Models: NC Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 13 for details.   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Protection circuits</b>                |                                   |   | Surge suppressor, Load short-circuit protection   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Ambient temperature range</b>          |                                   |   | Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)  |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Ambient humidity range</b>             |                                   |   | Operating and Storage: 35% to 95% (with no condensation)  |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Temperature influence</b>              |                                   |   | ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C   |                          |                         |                         | ±20% max. of sensing distance at 23°C in the temperature range of -25 to 70°C |                         | ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C |                           | ±20% max. of sensing distance at 23°C in the temperature range of -25 to 70°C |  |               |  |
| <b>Voltage influence</b>                  |                                   |   | ±1% max. of sensing distance at rated voltage in the rated voltage ±15% range   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Insulation resistance</b>              |                                   |   | 50 MΩ min. (at 500 VDC) between current-carrying parts and case   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Dielectric strength</b>                |                                   |   | 1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case  |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Vibration resistance (destruction)</b> |                                   |   | 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Shock resistance (destruction)</b>     |                                   |   | 500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions  |                          |                         |                         | 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions                |                         |   |                           |   |  |               |  |
| <b>Degree of protection</b>               |                                   |   | Pre-wired Models/Pre-wired Connector Models: IP67 (IEC 60529), IP67G *3 (JIS C 0920 Annex 1) Passed OMRON's Oil-resistant Component Evaluation Standards *4 (Cutting oil type: specified in JIS K 2241:2000, Temperature: 35 °C max.) and ISO 20653 (old standard: DIN 40050 PART9) IP69K |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Connecting method</b>                  |                                   |   | Pre-wired Models (Standard cable length: 2 m) and Pre-wired Connector Models (Standard cable length: 0.3 m)   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Weight (packed state)</b>              | <b>Pre-wired Models</b>           | Approx. 60 g  |   |                          | Approx. 70 g            |                         | Approx. 130 g   |                         | Approx. 150 g   |                           | Approx. 180 g   |  | Approx. 210 g |  |
|   | <b>Pre-wired Connector Models</b> | Approx. 30 g  |   |                          | Approx. 40 g            |                         | Approx. 70 g  |                         | Approx. 90 g  |                           | Approx. 110 g   |  | Approx. 140 g |  |
| <b>Materials</b>                          | <b>Case</b>                       | Nickel-plated brass   |   | Stainless steel (SUS303) |                         | Nickel-plated brass     |   |                         |   |                           |   |  |               |  |
|   | <b>Sensing surface</b>            | Polybutylene terephthalate (PBT)  |   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
|   | <b>Clamping nuts</b>              | Nickel-plated brass   |   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
|   | <b>Toothed washer</b>             | Zinc-plated iron  |   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Cable</b>                              | Vinyl chloride (PVC)              |   |   |                          |                         |                         |   |                         |   |                           |   |  |               |  |
| <b>Accessories</b>                        |                                   |   | Instruction manual, Clamping nuts, Toothed washer   |                          |                         |                         |   |                         |   |                           |   |  |               |  |

\*1. Use the Sensor within the range in which the setting indicator (green LED) is ON (except D2 Models).

\*2. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

\*3. The IP67G is the degree of protection which is defined according to the JIS (Japanese Industrial Standards). The IP67 indicates the same level of protection as defined by the IEC, and the G indicates that a device has resistance to oil.

\*4. The Oil-resistant Component Evaluation Standards are OMRON's own durability evaluation standards. 2-year oil resistance indicates the median value of the product design and the oil-resistance performance criterion result (=Typical value). The Pre-wired Connector Model verifies 2 years of oil resistance when mating with Round Oil-resistant Connectors XS5 NEXT series correctly. The degree of protection is not satisfied with the part where cable wires are uncovered for the Pre-wired Models.

## E2EQ NEXT Series (Spatter-resistant Triple distance model) DC 2-wire

| Item                               | Size<br>Shielded<br>Model  | M8  | M12  | M18  | M30                  |
|------------------------------------|----------------------------|---|--|--|----------------------|
|                                    |                            | Shielded  |  |  |                      |
|                                    |                            | E2EQ-X3D□   | E2EQ-X7D□  | E2EQ-X11D□   | E2EQ-X20D□           |
| Sensing distance                   |                            | 3 mm ±10%   | 7 mm ±10%  | 11 mm ±10%   | 20 mm ±10%           |
| Setting distance *1                |                            | 0 to 2.4 mm   | 0 to 5.6 mm  | 0 to 8.8 mm  | 0 to 16 mm           |
| Differential travel                |                            | 15% max. of sensing distance  |  |  |                      |
| Detectable object                  |                            | Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 9.)              |  |  |                      |
| Standard sensing object            |                            | Iron, 9 × 9 × 1 mm  | Iron, 21 × 21 × 1 mm   | Iron, 33 × 33 × 1 mm   | Iron, 60 × 60 × 1 mm |
| Response frequency *2              |                            | 250 Hz  | 250 Hz   | 250 Hz   | 200 Hz               |
| Power supply voltage               |                            | 10 to 30 VDC, (including 10% ripple (p-p))  |  |  |                      |
| Leakage current                    |                            | 0.8 mA max.   |  |  |                      |
| Control output                     | Load current               | 3 to 100 mA   |  |  |                      |
|                                    | Residual voltage           | Polarity: 3 V max. (Load current: 100 mA, Cable length: 2 m)<br>No polarity: 5 V max. (Load current: 100 mA, Cable length: 2 m) |  |  |                      |
| Indicator                          |                            | D1 Models: Operation indicator (orange), Setting indicator (green)<br>D2 Models: Operation indicator (orange)                   |  |  |                      |
| Operation mode                     |                            | D1 Models: NO    Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 13 for details.<br>D2 Models: NC          |  |  |                      |
| Protection circuits                |                            | Surge suppressor, Load short-circuit protection   |  |  |                      |
| Ambient temperature range          |                            | Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)  |  |  |                      |
| Ambient humidity range             |                            | Operating and Storage: 35% to 95% (with no condensation)  |  |  |                      |
| Temperature influence              |                            | ±10% max. of sensing distance at 23°C<br>in the temperature range of -25 to 70°C  |  | ±20% max. of sensing distance at 23°C<br>in the temperature range of -25 to 70°C |                      |
| Voltage influence                  |                            | ±1% max. of sensing distance at rated voltage in the rated voltage ±15% range   |  |  |                      |
| Insulation resistance              |                            | 50 MΩ min. (at 500 VDC) between current-carrying parts and case   |  |  |                      |
| Dielectric strength                |                            | 1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case  |  |  |                      |
| Vibration resistance (destruction) |                            | 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions   |  |  |                      |
| Shock resistance (destruction)     |                            | 500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions  | 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions |  |                      |
| Degree of protection               |                            | Pre-wired Models/Pre-wired Connector Models: IP67 (IEC 60529) and IP67G *3 (JIS C 0920 Annex 1)                                 |  |  |                      |
| Connecting method                  |                            | Pre-wired Models (Standard cable length: 2 m) and Pre-wired Connector Models (Standard cable length: 0.3 m)                     |  |  |                      |
| Weight (packed state)              | Pre-wired Models           | Approx. 60 g  | Approx. 70 g   | Approx. 150 g  | Approx. 210 g        |
|                                    | Pre-wired Connector Models | Approx. 30 g  | Approx. 40 g   | Approx. 90 g   | Approx. 140 g        |
| Materials                          | Case                       | Fluororesin coating (Base material: brass)  |  |  |                      |
|                                    | Sensing surface            | Fluororesin   |  |  |                      |
|                                    | Clamping nuts              | Fluororesin coating (Base material: brass)  |  |  |                      |
|                                    | Toothed washer             | Zinc-plated iron  |  |  |                      |
|                                    | Cable                      | Vinyl chloride (PVC)  |  |  |                      |
| Accessories                        |                            | Instruction manual, Clamping nuts, Toothed washer   |  |  |                      |

\*1. Use the Sensor within the range in which the setting indicator (green LED) is ON (except D2 Models).

\*2. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

\*3. The IP67G is the degree of protection which is defined according to the JIS (Japanese Industrial Standards).

The IP67 indicates the same level of protection as defined by the IEC, and the G indicates that a device has resistance to oil.

# E2E/E2EQ NEXT Series

## E2E NEXT Series (Single distance model) DC 2-wire

| Item                               | Size<br>Shielded<br>Model  | M8   | M12  | M18                  |
|------------------------------------|----------------------------|--|--|----------------------|
|                                    |                            | Shielded   |  |                      |
|                                    |                            | E2E-X1R5D□   | E2E-X2R5D□   | E2E-X5D□             |
| Sensing distance                   |                            | 1.5 mm ±10%  | 2.5 mm ±10%  | 5 mm ±10%            |
| Setting distance *1                |                            | 0 to 1.2 mm  | 0 to 2 mm  | 0 to 4 mm            |
| Differential travel                |                            | 10% max. of sensing distance   |  |                      |
| Detectable object                  |                            | Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 9.)   |  |                      |
| Standard sensing object            |                            | Iron, 10 × 10 × 1 mm   | Iron, 12 × 12 × 1 mm   | Iron, 18 × 18 × 1 mm |
| Response frequency *2              |                            | 250 Hz   | 250 Hz   | 250 Hz               |
| Power supply voltage               |                            | 10 to 30 VDC, (including 10% ripple (p-p))   |  |                      |
| Leakage current                    |                            | 0.8 mA max.  |  |                      |
| Control output                     | Load current               | 3 to 100 mA  |  |                      |
|                                    | Residual voltage           | Polarity: 3 V max. (Load current: 100 mA, Cable length: 2 m)<br>No polarity: 5 V max. (Load current: 100 mA, Cable length: 2 m)  |  |                      |
| Indicator                          |                            | D1 Models: Operation indicator (orange), Setting indicator (green)<br>D2 Models: Operation indicator (orange)  |  |                      |
| Operation mode                     |                            | D1 Models: NO      Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 13 for details.<br>D2 Models: NC   |  |                      |
| Protection circuits                |                            | Surge suppressor, Load short-circuit protection  |  |                      |
| Ambient temperature range          |                            | Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)   |  |                      |
| Ambient humidity range             |                            | Operating and Storage: 35% to 95% (with no condensation)   |  |                      |
| Temperature influence              |                            | ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C  |  |                      |
| Voltage influence                  |                            | ±1% max. of sensing distance at rated voltage in the rated voltage ±15% range  |  |                      |
| Insulation resistance              |                            | 50 MΩ min. (at 500 VDC) between current-carrying parts and case  |  |                      |
| Dielectric strength                |                            | 1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case   |  |                      |
| Vibration resistance (destruction) |                            | 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions  |  |                      |
| Shock resistance (destruction)     |                            | 500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions   | 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions |                      |
| Degree of protection               |                            | Pre-wired Models/Pre-wired Connector Models: IP67 (IEC 60529), IP67G *3 (JIS C 0920 Annex 1) Passed OMRON's Oil-resistant Component Evaluation Standards *4 (Cutting oil type: specified in JIS K 2241:2000, Temperature: 35°C max.) and ISO 20653 (old standard: DIN 40050 PART9) IP69K |  |                      |
| Connecting method                  |                            | Pre-wired Models (Standard cable length: 2 m) and Pre-wired Connector Models (Standard cable length: 0.3 m)  |  |                      |
| Weight (packed state)              | Pre-wired Models           | Approx. 60 g   | Approx. 70 g   | Approx. 130 g        |
|                                    | Pre-wired Connector Models | Approx. 30 g   | Approx. 40 g   | Approx. 70 g         |
| Materials                          | Case                       | Stainless steel (SUS303)   | Nickel-plated brass  |                      |
|                                    | Sensing surface            | Polybutylene terephthalate (PBT)   |  |                      |
|                                    | Clamping nuts              | Nickel-plated brass  |  |                      |
|                                    | Toothed washer             | Zinc-plated iron   |  |                      |
|                                    | Cable                      | Vinyl chloride (PVC)   |  |                      |
| Accessories                        |                            | Instruction manual, Clamping nuts, Toothed washer  |  |                      |

\*1. Use the Sensor within the range in which the setting indicator (green LED) is ON (except D2 Models).

\*2. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard.

\*3. The IP67G is the degree of protection which is defined according to the JIS (Japanese Industrial Standards).

The IP67 indicates the same level of protection as defined by the IEC, and the G indicates that a device has resistance to oil.

\*4. The Oil-resistant Component Evaluation Standards are OMRON's own durability evaluation standards.

2-year oil resistance indicates the median value of the product design and the oil-resistance performance criterion result (=Typical value).

The Pre-wired Connector Model verifies 2 years of oil resistance when mating with Round Oil-resistant Connectors XS5 NEXT series correctly.

The degree of protection is not satisfied with the part where cable wires are uncovered for the Pre-wired Models.


# Engineering Data (Reference Value)

## Sensing Area

Triple distance model, Spatter-resistant Triple distance model


### Shielded Models

E2E(Q)-X□D□

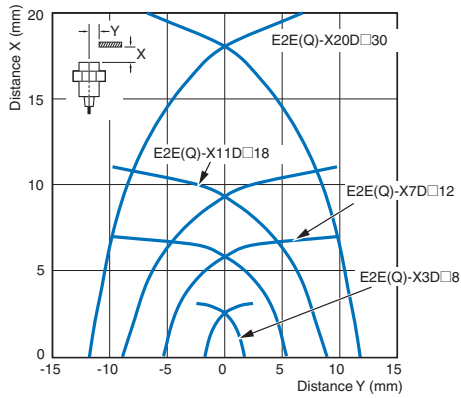

### Unshielded Models


E2E-X□MD□

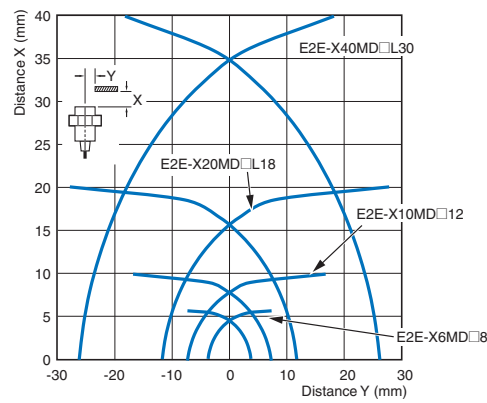

## Single distance model

### Shielded Models


E2E-X1R5D□/-X2R5D□/-X5D□

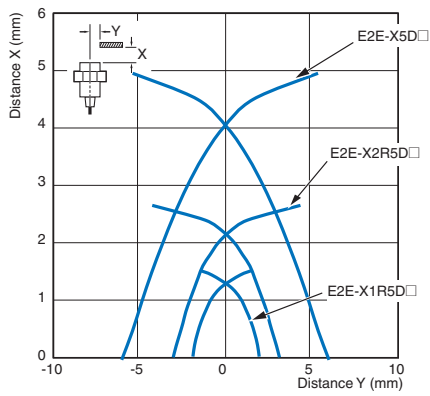

## Influence of Sensing Object Size and Materials


Triple distance model, Spatter-resistant Triple distance model  
Shielded Models

**E2E(Q)-X3D□8**

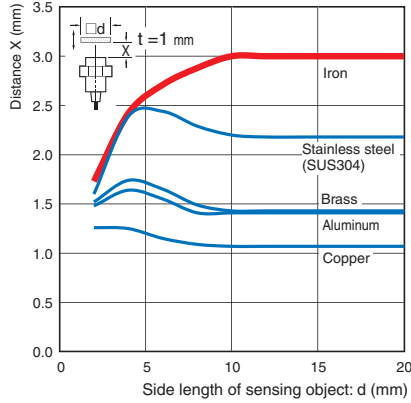


Unshielded Models

**E2E-X6MD□8**

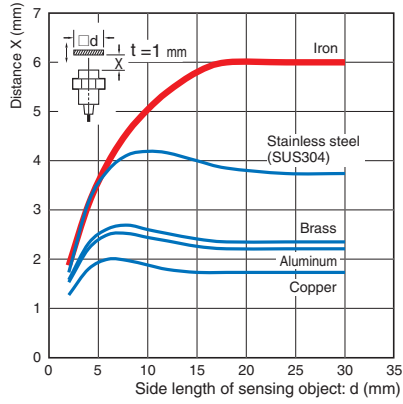


Single distance model  
Shielded Models


**E2E-X1R5D□**

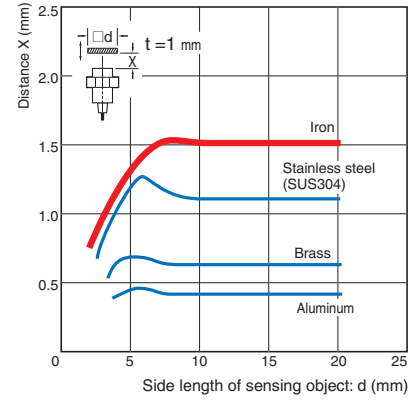


**E2E(Q)-X7D□12**

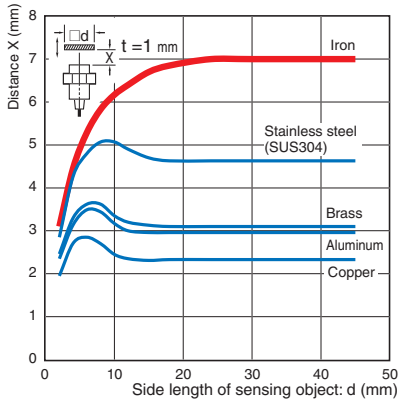


**E2E-X10MD□12**

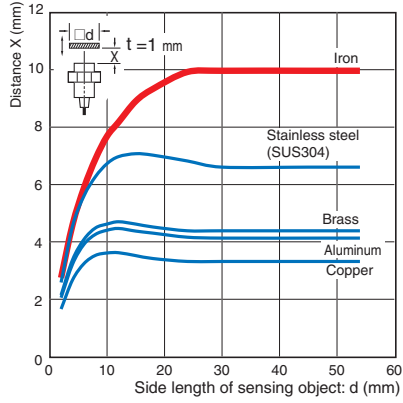


**E2E-X2R5D□**

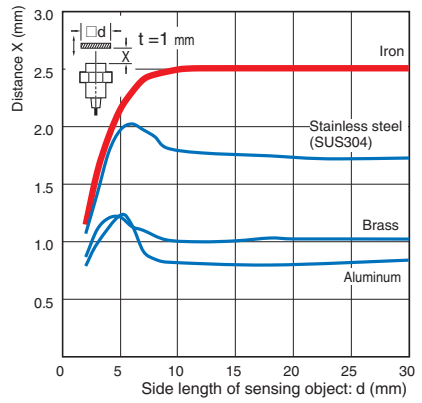


**E2E(Q)-X11D□18**

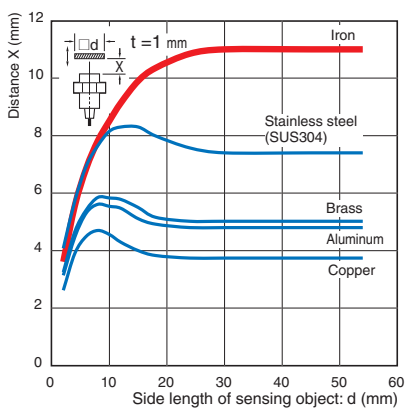

**E2E-X20MD□L18**


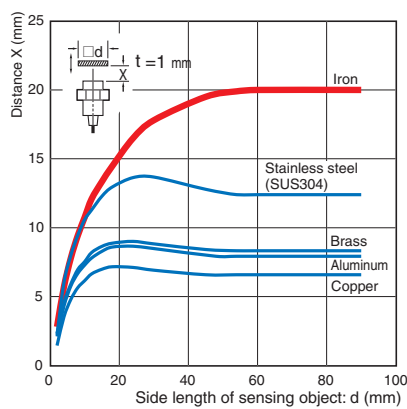


**E2E-X5D□**

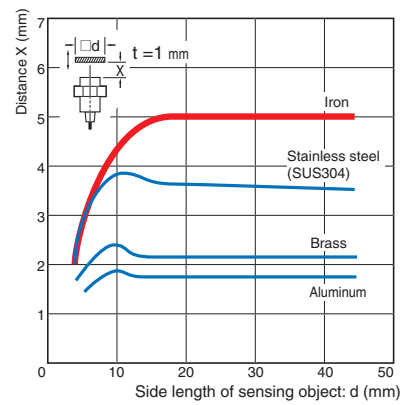

**E2E(Q)-X20D□30**

**E2E-X40MD□L30**

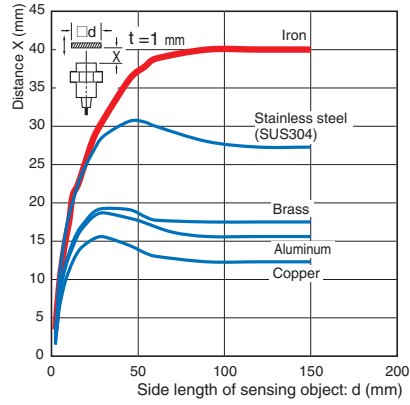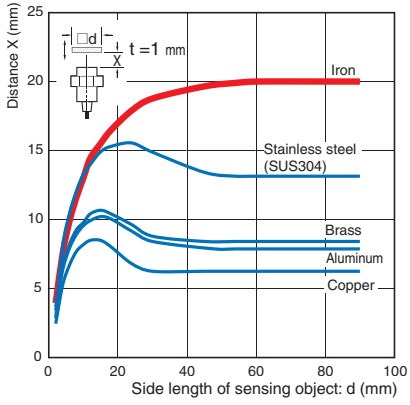


# E2E/E2EQ NEXT Series

## Leakage Current

Triple distance model, Spatter-resistant Triple distance model, Single distance model


E2E-X□(M)D□(-T)/E2EQ-X□D□(-T)

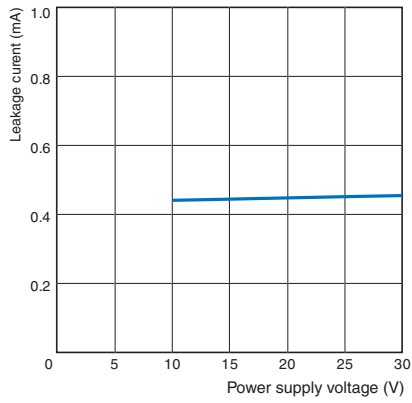

## Residual Output Voltage

Triple distance model, Spatter-resistant Triple distance model, Single distance model

E2E-X□(M)D□(-T)/E2EQ-X□D□(-T)

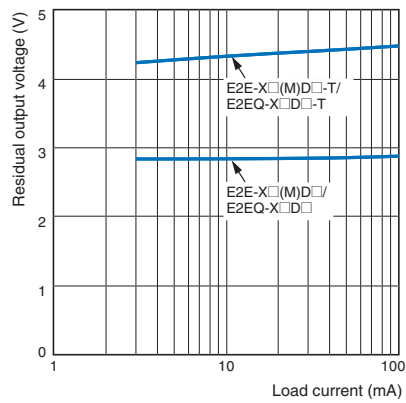

# I/O Circuit Diagrams

## DC 2-Wire Models

| Operation mode | Model          | Timing Chart | Output circuit  |
|----------------|----------------|--------------|---|
| NO             | E2E(Q)-X□D1□   |              | <p>Note: The load can be connected to either the +V or 0 V side.</p>  |
|                | E2E(Q)-X□D1□-T |              | <p>Note1. The load can be connected to either the +V or 0 V side.<br/>                 2. The E2E□-X□D1□(-M1TGJ)-T has no polarity. There is no need to be concerned about the polarity of brown and blue wires, or pins 3 and 4.</p> |
| NC             | E2E(Q)-X□D2□   |              | <p>Note: The load can be connected to either the +V or 0 V side.</p>  |
|                | E2E(Q)-X□D2□-T |              | <p>Note1. The load can be connected to either the +V or 0 V side.<br/>                 2. The E2E□-X□D1□(-M1TGJ)-T has no polarity. There is no need to be concerned about the polarity of brown and blue wires, or pins 1 and 2.</p> |

# E2E/E2EQ NEXT Series

## Connections to Sensor I/O Connectors

| Proximity Sensor                 |          |                |   | Sensor I/O Connector model number  | Connections  |
|----------------------------------|----------|----------------|---|--|--|
| Type                             | Polarity | Operation mode | Model                                   |  |  |
| DC 2-wire (Smartclick Connector) | Yes      | NO             | E2E-X□D1□-M1TGJ<br>E2EQ-X□D1□-M1TGJ     | <b>Note:</b> For details of the connector, refer to <i>XS5 NEXT Series</i> on page 87. <i>XS5 Series</i> on page 94. | E2E/E2EQ NEXT Series XS5<br><ul style="list-style-type: none"> <li>① Brown (+)</li> <li>② White (not connected)</li> <li>③ Blue (not connected)</li> <li>④ Black (-)</li> </ul>          |
|                                  | No       | NC             | E2E-X□D2□-M1TGJ<br>E2EQ-X□D2□-M1TGJ     |  | E2E/E2EQ NEXT Series XS5<br><ul style="list-style-type: none"> <li>① Brown (+)</li> <li>② White (-)</li> <li>③ Blue (not connected)</li> <li>④ Black (not connected)</li> </ul>          |
|                                  | Yes      | NO             | E2E-X□D1□-M1TGJ-T<br>E2EQ-X□D1□-M1TGJ-T |  | E2E/E2EQ NEXT Series XS5F<br><ul style="list-style-type: none"> <li>① Brown (not connected)</li> <li>② White (not connected)</li> <li>③ Blue (+) (-)</li> <li>④ Black (-) (+)</li> </ul> |
|                                  | No       | NC             | E2E-X□D2□-M1TGJ-T<br>E2EQ-X□D2□-M1TGJ-T |  | E2E/E2EQ NEXT Series XS5F<br><ul style="list-style-type: none"> <li>① Brown (+)(-)</li> <li>② White (-)(+)</li> <li>③ Blue (not connected)</li> <li>④ Black (not connected)</li> </ul>   |


**Note:** Different from Proximity Sensor wire colors.

\* If the XS5W Series Connector which has a socket and plug on the cable ends is connected to the Sensor, this part will be a plug.



## Safety Precautions




Be sure to read the precautions for all models in the website at: <http://www.ia.omron.com/>.

### Warning Indications

|  |  |
|--|--|
|  <b>WARNING</b> | <b>Warning level</b><br>Indicates a potentially hazardous situation which, if not avoided, will result in minor or moderate injury, or may result in serious injury or death. Additionally there may be significant property damage. |
| <b>Precautions for Safe Use</b>  | Supplementary comments on what to do or avoid doing, to use the product safely.  |
| <b>Precautions for Correct Use</b>   | Supplementary comments on what to do or avoid doing, to prevent failure to operate, malfunction or undesirable effect on product performance.  |

### Meaning of Product Safety Symbols

|   |  |
|---|--|
|  | <b>General prohibition</b><br>Indicates the instructions of unspecified prohibited action.     |
|  | <b>Caution, explosion</b><br>Indicates the possibility of explosion under specific conditions. |

|  |
|--|
|  <b>WARNING</b>   |
| <p><b>This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.</b></p> <div style="text-align: right;"></div> <hr/> <p><b>Risk of explosion.</b><br/><b>Do not connect sensor to AC power supply.</b></p> <div style="text-align: right;"></div> |

### Precautions for Safe Use

The following precautions must be observed to ensure safe operation.

1. Do not use the product in an environment where flammable or explosive gas is present.
2. Do not attempt to disassemble, repair, or modify the product.
3. Do not use a voltage that exceeds the rated operating voltage range. Applying a voltage that is higher than the operating voltage range may result in damage or burnout.
4. Be sure that the power supply polarity and other wiring is correct. Incorrect wiring may cause explosion or burnout.
5. If the power supply is connected directly without a load, the internal elements may explode or burn. Be sure to insert a load when connecting the power supply.
6. Dispose of this product as industrial waste.

### Precautions for Correct Use

Do not use this product under ambient conditions that exceed the ratings.

#### Operating Environment

1. Do not install the product in the following locations. Doing so may result in product failure or malfunction.
  - (1) Outdoor locations directly subject to sunlight, rain, snow, water droplets, or oil.
  - (2) Locations subject to atmospheres with chemical vapors, in particular solvents and acids.
  - (3) Locations subject to corrosive gases.
2. The Sensor may malfunction if used near ultrasonic cleaning equipment, high-frequency equipment, transceivers, cellular phones, inverters, or other devices that generate a high-frequency electric field. Please refer to the Precautions for Correct Use on the OMRON website ([www.ia.omron.com](http://www.ia.omron.com)) for typical measures.
3. Laying the Proximity Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in incorrect operation and damage due to induction. Wire the Sensor using a separate conduit or independent conduit.
4. Never use thinner or other solvents. Otherwise, the Sensor surface may be dissolved.
5. The following conditions shall be observed if you use the product under an environment using cutting oil that may affect product's life and/or performance.
  - Usage under the cutting oil condition designated by the specification
  - Usage under the cutting oil dilution ratio recommended by its manufacturer
  - Usage in oil or water is prohibited


Impact on the product life may differ depending on the oil you use. Before using the cutting oil, make sure that it should not cause deterioration or degradation of sealing components.

# E2E/E2EQ NEXT Series

## Design

### Influence of Surrounding Metal

When mounting the Proximity Sensor using a nut, only use the provided nut. And ensure that the minimum distances given in the following table are maintained.

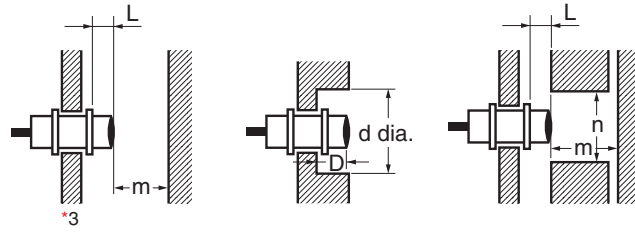


(Unit: mm)

| Type  |            | Item | M8  | M12 | M18 | M30   |
|---|------------|------|-----|-----|-----|-------|
| Triple distance model/<br>Spatter-resistant Triple<br>distance model<br>E2E(Q)-X□D□(-T)<br>*1 | Shielded   | L    | 0   | 0   | 0   | 0     |
|   |            | d    | 20  | 20  | 50  | 70    |
|   |            | D    | 2   | 4   | 4   | 8     |
|   |            | m    | 9   | 18  | 33  | 60    |
|   |            | n    | 18  | 20  | 54  | 90    |
| Triple distance model<br>E2E-X□MD□(-T)<br>*2  | Unshielded | L    | 10  | 16  | 31  | 50 *3 |
|   |            | d    | 30  | 50  | 90  | 170   |
|   |            | D    | 13  | 20  | 35  | 55    |
|   |            | m    | 18  | 30  | 60  | 120   |
|   |            | n    | 30  | 50  | 80  | 140   |
| Single distance model<br>E2E-X□R5D□(-T)<br>E2E-X5D□(-T)<br>*2                                 | Shielded   | L    | 0   | 0   | 0   | ---   |
|   |            | d    | 8   | 12  | 18  |       |
|   |            | D    | 0   | 0   | 0   |       |
|   |            | m    | 4.5 | 8   | 20  |       |
|   |            | n    | 12  | 18  | 27  |       |

**Note:** Nuts that are supplied along with each Sensor (\*1, \*2) are different. Refer to *Dimensions* for details on shapes.

\*3. If you use the M30 Triple distance model of Unshielded Model, the panel thickness (t) is 4 mm or less.

When the Proximity Sensor is mounted in metal, ensure that the minimum distances given in the following table are maintained.

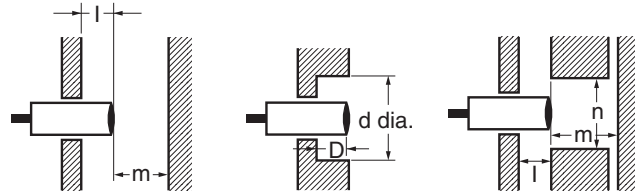


(Unit: mm)

| Type  |            | Item | M8  | M12 | M18 | M30 |
|---|------------|------|-----|-----|-----|-----|
| Triple distance model/<br>Spatter-resistant Triple<br>distance model<br>E2E(Q)-X□D□(-T) | Shielded   | l    | 2   | 4   | 4   | 8   |
|   |            | d    | 20  | 20  | 50  | 70  |
|   |            | D    | 2   | 4   | 4   | 8   |
|   |            | m    | 9   | 18  | 33  | 60  |
|   |            | n    | 18  | 20  | 54  | 90  |
| Triple distance model<br>E2E-X□MD□(-T)  | Unshielded | l    | 13  | 20  | 35  | 55  |
|   |            | d    | 30  | 50  | 90  | 170 |
|   |            | D    | 13  | 20  | 35  | 55  |
|   |            | m    | 18  | 30  | 60  | 120 |
|   |            | n    | 30  | 50  | 80  | 140 |
| Single distance model<br>E2E-X□R5D□(-T)<br>E2E-X5D□(-T)                                 | Shielded   | l    | 0   | 0   | 0   | --- |
|   |            | d    | 8   | 12  | 18  |     |
|   |            | D    | 0   | 0   | 0   |     |
|   |            | m    | 4.5 | 8   | 20  |     |
|   |            | n    | 12  | 18  | 27  |     |

## Mutual Interference

When the Proximity Sensor is embedded in metal, ensure that the minimum distances given in the following table are maintained.

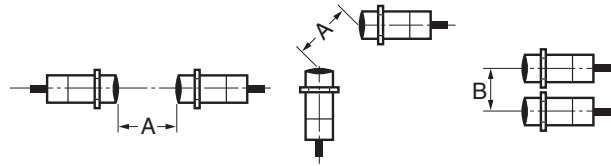

(Unit: mm)


| Type  |            | Item | M8 | M12 | M18 | M30 |
|---|------------|------|----|-----|-----|-----|
| Triple distance model/<br>Spatter-resistant Triple<br>distance model<br>E2E(Q)-X□D□(-T) | Shielded   | A    | 25 | 40  | 70  | 140 |
|   |            | B    | 20 | 30  | 45  | 70  |
| Triple distance model<br>E2E-X□MD□(-T)  | Unshielded | A    | 80 | 120 | 200 | 380 |
|   |            | B    | 60 | 100 | 120 | 280 |
| Single distance model<br>E2E-X□R5D□(-T)<br>E2E-X5D□(-T)                                 | Shielded   | A    | 20 | 30  | 50  | --- |
|   |            | B    | 15 | 20  | 35  | --- |

## Mounting

### Tightening Force

Do not tighten the nut with excessive force.

A washer must be used with the nut.

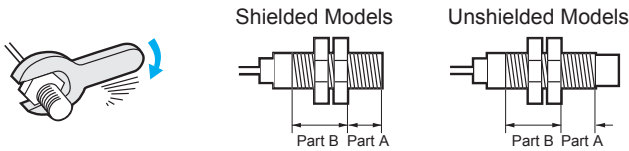

- Note:** 1. The allowable tightening strength depends on the distance from the edge of the head, as shown in the following table. (A is the distance from the edge of the head. B includes the nut on the head side. If the edge of the nut is in part A, the tightening torque for part A applies instead.)  
2. The following strengths assume washers are being used.

### Triple distance model

| Model |            | Part A         |        | Part B |
|-------|------------|----------------|--------|--------|
|       |            | Dimension (mm) | Torque | Torque |
| M8    | Shielded   | 9              | 4 N·m  | 10 N·m |
|       | Unshielded | 3              |        |        |
| M12   | Shielded   | 16             | 6 N·m  | 15 N·m |
|       | Unshielded | 9              |        |        |
| M18   | Shielded   | 16             | 15 N·m | 60 N·m |
|       | Unshielded | 3              |        |        |
| M30   | Shielded   | 23             | 40 N·m | 80 N·m |
|       | Unshielded | 8              |        |        |

### Spatter-resistant Triple distance model

| Model | Part A         |        | Part B |
|-------|----------------|--------|--------|
|       | Dimension (mm) | Torque | Torque |
| M8    | 9              | 4 N·m  | 10 N·m |
| M12   | 16             | 6 N·m  | 15 N·m |
| M18   | 16             | 15 N·m | 30 N·m |
| M30   | 23             | 40 N·m | 80 N·m |

### Single distance model

| Model | Part A         |        | Part B |
|-------|----------------|--------|--------|
|       | Dimension (mm) | Torque | Torque |
| M8    | 9              | 9 N·m  | 12 N·m |
| M12   | ---            | 30 N·m |        |
| M18   | ---            | 70 N·m |        |

# E2E/E2EQ NEXT Series

## Dimensions

(Unit: mm)  
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

### Sensors

### E2E NEXT Series (Triple distance model)

### DC 2-wire


#### Pre-wired Models Shielded



#### Pre-wired Models Unshielded




#### E2E-X3D□8

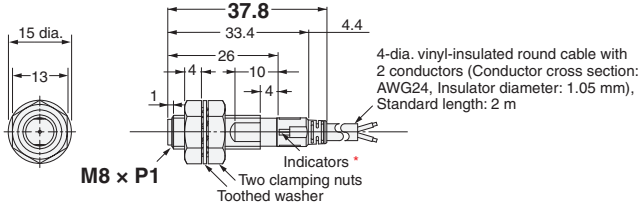


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X6MD□8

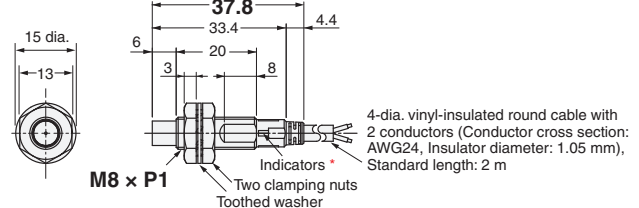


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X7D□12

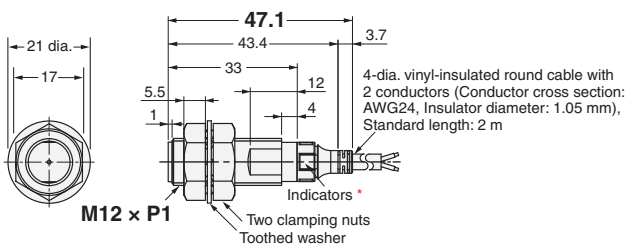


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X10MD□12

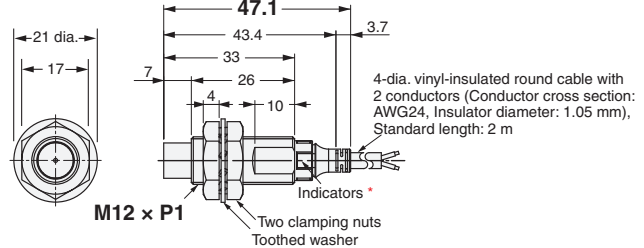


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X11D□18

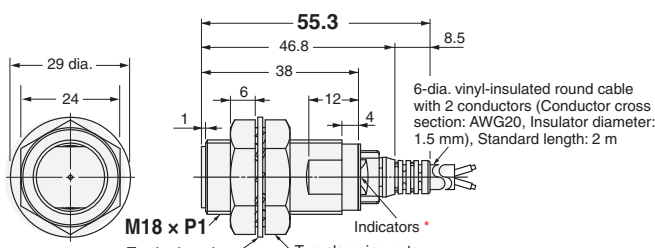


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X20MD□L18

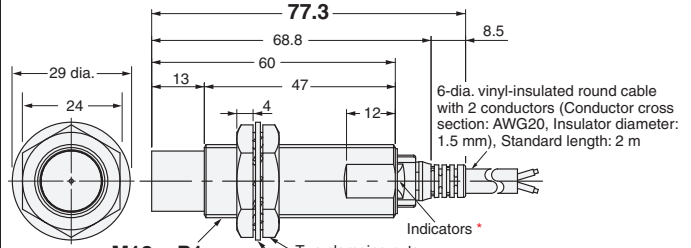


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X20D□30

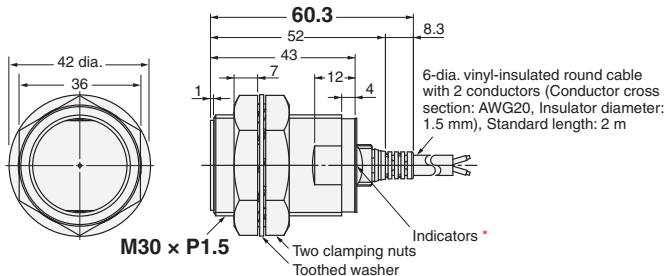


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

#### E2E-X40MD□L30

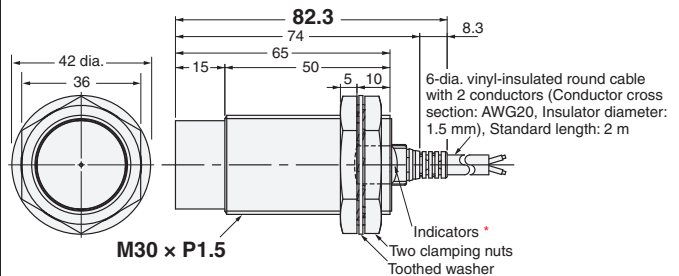


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

## Mounting Hole Dimensions




| Dimensions | F (mm)             |
|------------|--------------------|
| M8         | 8.5 dia. $+0.5_0$  |
| M12        | 12.5 dia. $+0.5_0$ |
| M18        | 18.5 dia. $+0.5_0$ |
| M30        | 30.5 dia. $+0.5_0$ |

## Angle R of the Bending Wire



| Dimensions | R (mm) |
|------------|--------|
| M8         | 12     |
| M12        | 12     |
| M18        | 18     |
| M30        | 18     |

## Wire pullout position



| Dimensions | Sc (mm) |
|------------|---------|
| M8         | - (0)   |
| M12        | - (0)   |
| M18        | 2.5     |
| M30        | 2.5     |


## Pre-wired Connector Models Shielded



## Pre-wired Connector Models Unshielded




### E2E-X3D□8-M1TGJ

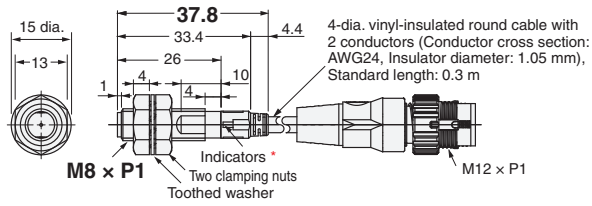


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

### E2E-X6MD□8-M1TGJ

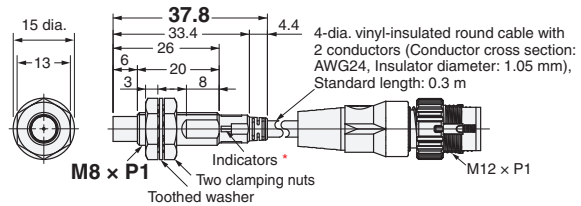


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

### E2E-X7D□12-M1TGJ

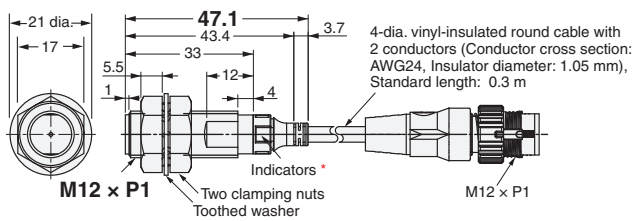


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

### E2E-X10MD□12-M1TGJ

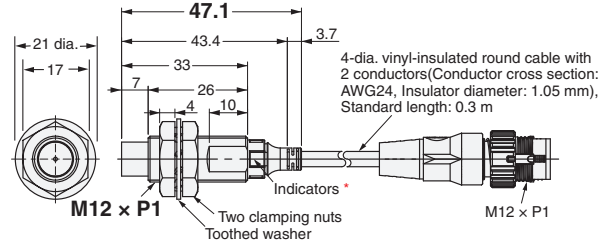


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

### E2E-X11D□18-M1TGJ

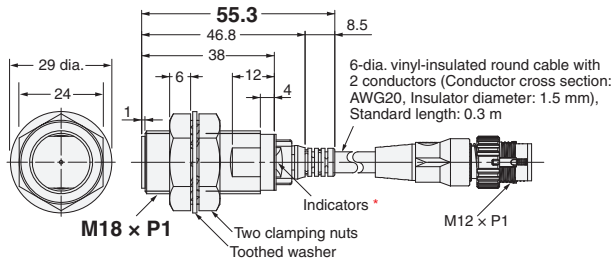


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

### E2E-X20MD□L18-M1TGJ

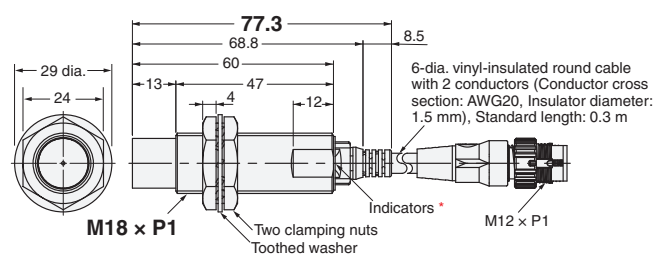


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

### E2E-X20D□30-M1TGJ

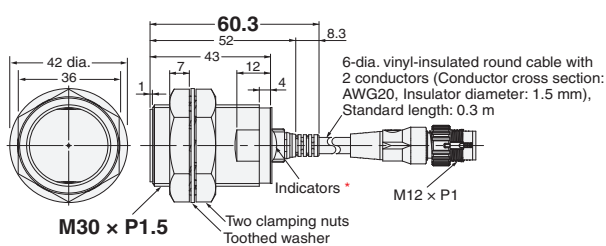

\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)


### E2E-X40MD□L30-M1TGJ

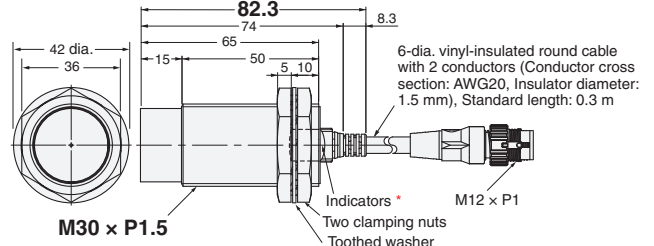

\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)


# E2E/E2EQ NEXT Series

## Mounting Hole Dimensions



| Dimensions | F (mm)  |
|------------|---|
| M8         | 8.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$  |
| M12        | 12.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ |
| M18        | 18.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ |
| M30        | 30.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ |

## Angle R of the Bending Wire



| Dimensions | R (mm) |
|------------|--------|
| M8         | 12     |
| M12        |        |
| M18        | 18     |
| M30        |        |

## Wire pullout position



| Dimensions | Sc (mm) |
|------------|---------|
| M8         | - (0)   |
| M12        |         |
| M18        | 2.5     |
| M30        |         |

Sensors


E2EQ NEXT Series (Spatter-resistant Triple distance model)

DC 2-wire

Pre-wired Models  
Shielded




E2EQ-X3D□8

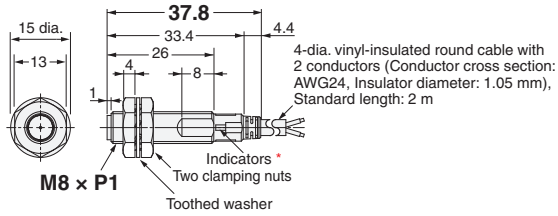


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

E2EQ-X7D□12

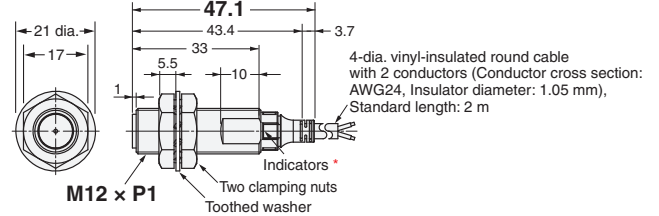


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

E2EQ-X11D□18

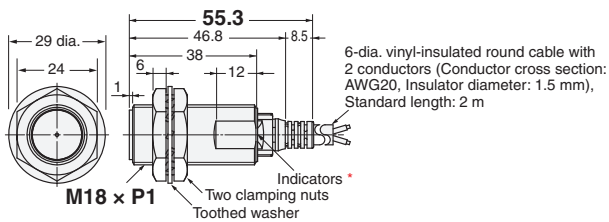

\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

E2EQ-X20D□30

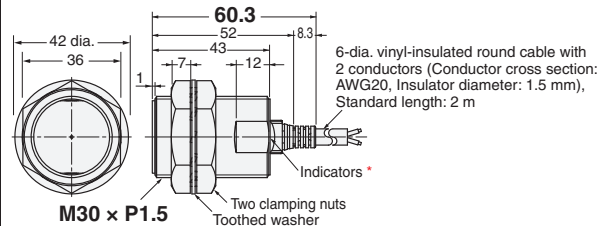


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

Pre-wired Connector Models  
Shielded




E2EQ-X3D□8-M1TGJ

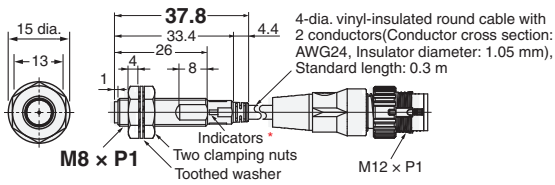


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

E2EQ-X7D□12-M1TGJ

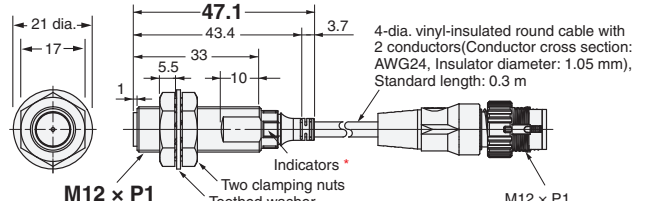


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

E2EQ-X11D□18-M1TGJ

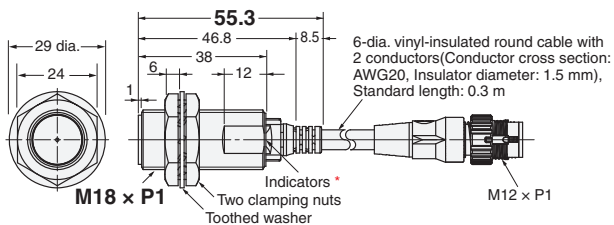


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

E2EQ-X20D□30-M1TGJ

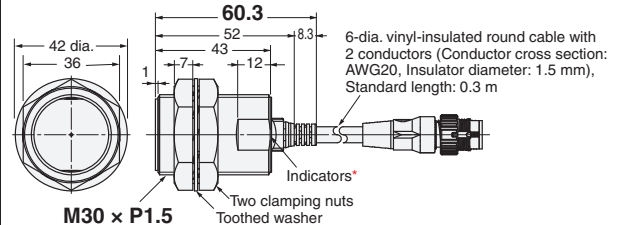


\* D1 Models: Operation indicator (Orange), Setting indicator (Green)  
D2 Models: Operation indicator (Orange)

Mounting Hole Dimensions




| Dimensions | F (mm)  |
|------------|---|
| M8         | 8.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$  |
| M12        | 12.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ |
| M18        | 18.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ |
| M30        | 30.5 dia. $\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ |

Angle R of the Bending Wire



| Dimensions | R (mm) |
|------------|--------|
| M8         | 12     |
| M12        | 12     |
| M18        | 18     |
| M30        | 18     |

Wire pullout position



| Dimensions | Sc (mm) |
|------------|---------|
| M8         | - (0)   |
| M12        | - (0)   |
| M18        | 2.5     |
| M30        | 2.5     |

# E2E/E2EQ NEXT Series

## Sensors


### E2E NEXT Series (Single distance model)

#### DC 2-wire


#### Pre-wired Models Shielded




#### E2E-X1R5D□

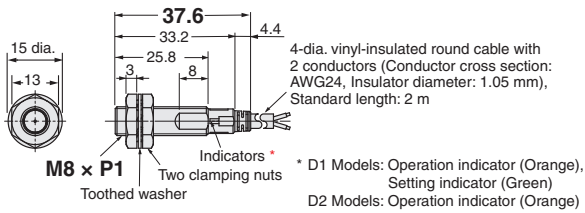

#### E2E-X2R5D□

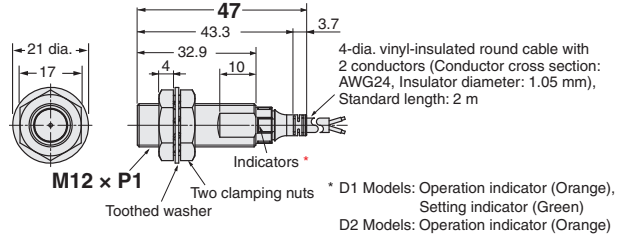


#### E2E-X5D□

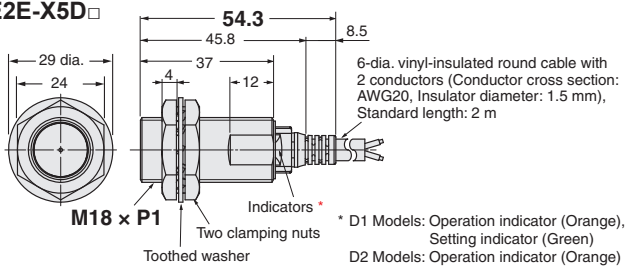


#### Pre-wired Connector Models Shielded




#### E2E-X1R5D□-M1TGJ

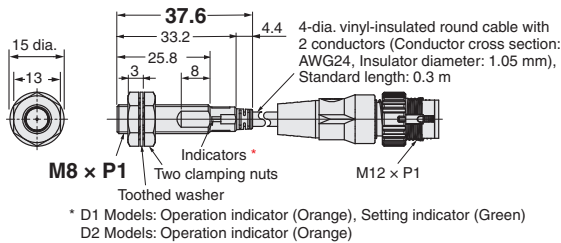


#### E2E-X2R5D□-M1TGJ

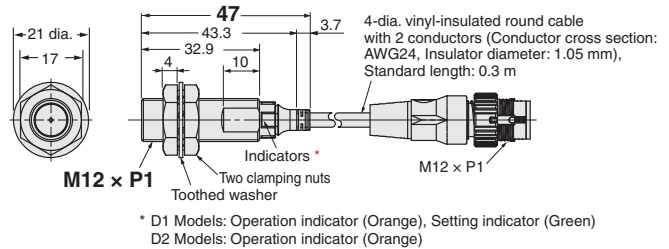

#### E2E-X5D□-M1TGJ

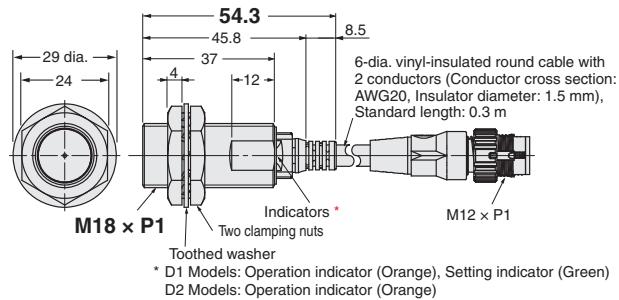


#### Mounting Hole Dimensions




| Dimensions | F (mm)             |
|------------|--------------------|
| M8         | 8.5 dia. $+0.5_0$  |
| M12        | 12.5 dia. $+0.5_0$ |
| M18        | 18.5 dia. $+0.5_0$ |
| M30        | 30.5 dia. $+0.5_0$ |

#### Angle R of the Bending Wire



| Dimensions | R (mm) |
|------------|--------|
| M8         | 12     |
| M12        | 12     |
| M18        | 18     |
| M30        | 18     |

#### Wire pullout position




| Dimensions | Sc (mm) |
|------------|---------|
| M8         | - (0)   |
| M12        | - (0)   |
| M18        | 2.5     |
| M30        | 2.5     |


Accessories (Sold Separately)

Quick fix (Mounting Sleeves)


Y92E-J8S12

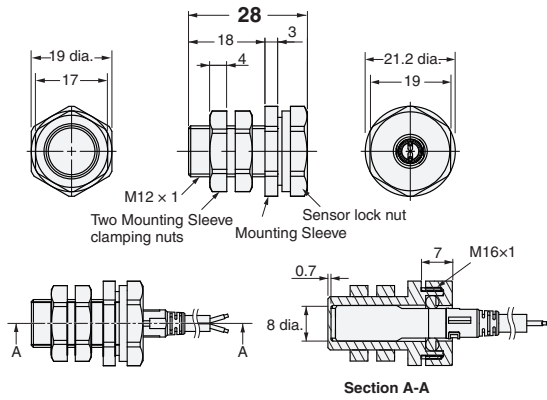

Y92E-J12S18

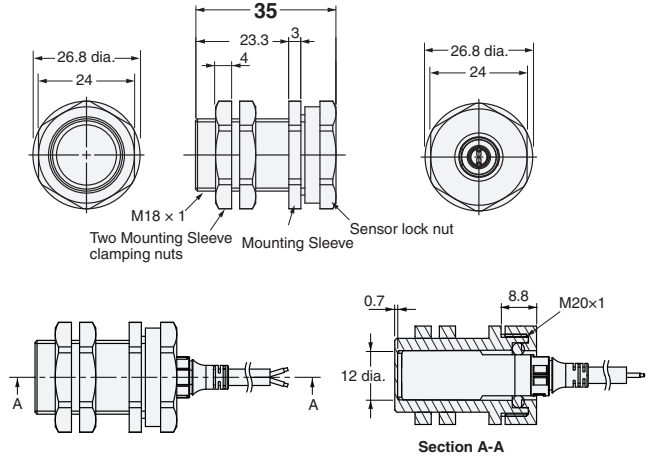

Y92E-J18S30

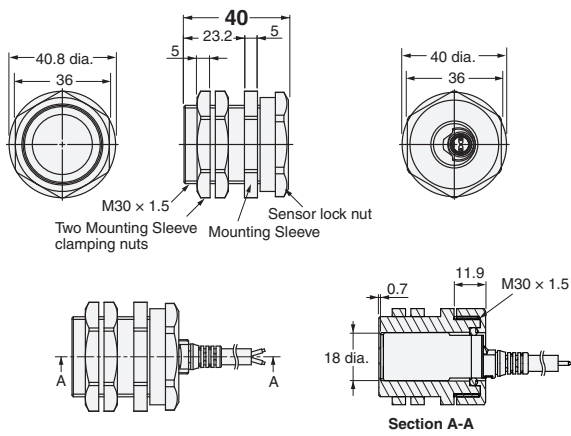

Material

|                              |  |
|------------------------------|--|
| Mounting Sleeve              | Polyetheretherketone (PEEK) / Polybutylene terephthalate (PBT) |
| Mounting Sleeve clamping nut | Polybutylene terephthalate (PBT)                               |
| Sensor lock nut              | Polybutylene terephthalate (PBT)                               |
| Sensor lock O-ring           | Material combining HNBR and fluororubber                       |

Tightening Force

| Model       | Torque                       |                 |
|-------------|------------------------------|-----------------|
|             | Mounting Sleeve clamping nut | Sensor lock nut |
| Y92E-J8S12  | 0.6 N·m                      | 0.6 N·m         |
| Y92E-J12S18 | 1.2 N·m                      | 1.2 N·m         |
| Y92E-J18S30 | 5 N·m                        | 3.5 N·m         |

**OMRON AUTOMATION AMERICAS HEADQUARTERS** • Chicago, IL USA • 847.843.7900 • 800.556.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON CANADA, INC. • HEAD OFFICE**

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON ELECTRONICS DE MEXICO • HEAD OFFICE**

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • [mela@omron.com](mailto:mela@omron.com)

**OMRON ELECTRONICS DE MEXICO • SALES OFFICE**

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • [mela@omron.com](mailto:mela@omron.com)

**OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE**

São Paulo, SP, Brasil • 55.11.2101.6300 • [www.omron.com.br](http://www.omron.com.br)

**OMRON ARGENTINA • SALES OFFICE**

Cono Sur • 54.11.4783.5300

**OMRON CHILE • SALES OFFICE**

Santiago • 56.9.9917.3920

**OTHER OMRON LATIN AMERICA SALES**

54.11.4783.5300

**OMRON EUROPE B.V.** • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • [www.industrial.omron.eu](http://www.industrial.omron.eu)

*Authorized Distributor:*

**Controllers & I/O**

- Machine Automation Controllers (MAC) • Motion Controllers
- Programmable Logic Controllers (PLC) • Temperature Controllers • Remote I/O

**Robotics**

- Industrial Robots • Mobile Robots

**Operator Interfaces**

- Human Machine Interface (HMI)

**Motion & Drives**

- Machine Automation Controllers (MAC) • Motion Controllers • Servo Systems
- Frequency Inverters

**Vision, Measurement & Identification**

- Vision Sensors & Systems • Measurement Sensors • Auto Identification Systems

**Sensing**

- Photoelectric Sensors • Fiber-Optic Sensors • Proximity Sensors
- Rotary Encoders • Ultrasonic Sensors

**Safety**

- Safety Light Curtains • Safety Laser Scanners • Programmable Safety Systems
- Safety Mats and Edges • Safety Door Switches • Emergency Stop Devices
- Safety Switches & Operator Controls • Safety Monitoring/Force-guided Relays

**Control Components**

- Power Supplies • Timers • Counters • Programmable Relays
- Digital Panel Meters • Monitoring Products

**Switches & Relays**

- Limit Switches • Pushbutton Switches • Electromechanical Relays
- Solid State Relays

**Software**

- Programming & Configuration • Runtime

*Printed on recycled paper.*