

High resolution BGS sensor

FASTUS

BGS-HDL Series

BGS-HDL05T □
BGS-HDL25T □□

Instruction manual

● Thank you for purchasing BGS-HDL series. We hope you are satisfied with its performance.
● Please read this manual carefully and keep it for future reference.

Indicates a possible hazard that may result in death, serious injury, or serious property damage if the product is used without observing the stated instructions.

Indicates a possible hazard that may result in moderate or light injury or property damage if the product is used without observing the stated instructions.

Warning Mandatory Requirements

● The light source of this product applies the visible light semiconductor laser. Do not allow the laser beam to enter an eye, either directly or reflected from reflective object. If the laser beam enters an eye, it may cause blindness.
● This product is not an explosion proof construction. Do not use the product under flammable, explosive gas or liquid environment.
● Do not disassemble or modify the product since it is not designed to automatically stop the laser emission when open. Disassembling or modifying at customer's end may cause personal injury, fire or electric shock.
● Never use this product as a sensing device for personnel protection.
● It is dangerous to wire or attach/remove the connector while the power is on. Make sure to turn off the power before conducting such work. If not, an electric shock may result.


Warning Safety Precautions

● Installing in the following places may result in malfunction:
1. A dusty or steamy place
2. A place generating corrosive gas
3. A place directly receiving scattering water or oil
4. A place suffered from heavy vibration or impact
● This product is not designed for outdoor use.
● Do not use the sensor in a transient state at power on (Approx. 2sec. for warm up period)
● Do not wire with the high voltage cable or the power lines. Failure to do so will cause malfunction by induction or damage.
● Detection characteristics may vary depending on the variation of individual product or state of detecting object.
● Do not use the product in water.
● Do not disassemble or modify the product. Disassembling or modifying may cause a failure or malfunction. OPTeX FA CO., LTD. and its sales representatives do not take any responsibility for any damage caused by such a failure or malfunction.
● Operate within the rated range.

Precautions for using laser

This product emits visible light laser beam and is in the category of Class 1 or Class 2 in IEC 60825-1 Laser Safety standard. A label among the requirements of the standard is affixed or attached to the product.

- Regulations in the USA
When exporting laser devices to the USA, the USA laser control, FDA (Food and Drug Administration) is applied. This product has been already reported to CDRH (Center for Devices and Electronic Health). For details, contact our customer service.

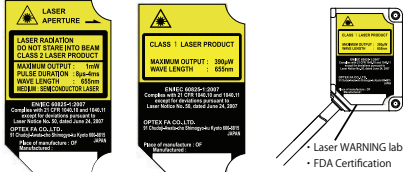

Included Items

- Please confirm following goods bundled in the box.
- BGS-HDL □□
 - This instruction manual
 - Mounting screws M3 × 15--2pcs
 - Bracket
 - Laser WARNING label

Specifications

Part number legend

BGS-HDL

T

Laser Class

● (none) : Class 1

● 2 : Class 2

Connect type

● (none) : Cable

● M12 : M12 Connector*

Max. working distance (cm)

* : Make-to-Order


●Specifications

Type	2m cable	BGS-HDL05T	BGS-HDL25T2
Connector type		BGS-HDL05TM12	BGS-HDL25TM122
Detection range		20 ~ 50mm	50 ~ 250mm
Repeat accuracy		0.01mm (Display: 0.01)	0.1mm (Display: 0.1) ±1
Min. detection step		0.08mm	0.8mm
Temperature Drift (typ.)		± 0.04%/°C of F.S	± 0.08%/°C of F.S.
Light source	Type (Wavelength) Pulse duration Repetition Maximum output	Red laser diode (Wave length: 655nm) Variable within 8 μs ~ 4ms Variable within 250 Hz ~ 2kHz 390 μW 1mW	
Laser class		CLASS 1 (IEC/JIS/FDA *)	CLASS 2 (IEC/JIS/FDA *)
Spot size		φ 0.8 mm	φ 1 mm
Response time		Min.: 1.5ms (Default: 1.5-7ms)	Min.: 1.5ms (Default: 3-14ms)
Hysteresis		0-22.49 (Default: 0.15)	0-01499 (Default: 1.0)
Detection range adjustment		Selectable from two methods, Teaching type / Target mode and Background mode used with manual adjustment	
Indicator		Laser radiation emission indicator: Green Output1 Indicator, Output2 Indicator (Orange)	
Display		7-segment 4-digit LED display	
Control output		NPN/PNP Open Collector (Selectable Functions) 2 system × 50mA max. / 24VDC. Residual voltage: 1.8V	
Output mode		Light ON / Dark ON / ZONE / FGS. Selectable by setting	
Timer function		OFF / On delay / Off delay / One shot, Selectable by setting (Unit: 1ms)	
Connection		Cable type: 2m cable, φ 4.5 Connector type: M12, 5-pin connector 300 mm	
External input mode (Input: Gray) *		Input (Gray) Laser OFF (N.O., N.C./Teach) / Sample hold / One shot, Selectable by setting	
External input mode (No.2 output/Teach input) *		Teach input selectable by setting Alternative with No.2 output.	
Rating	Supply voltage Current consumption Protection circuit Protection Degree	12-24 VDC including 10% ripple (p-p) 40mA max. / 24VDC excluding the current of Control Output Reverse connection protection, Overcurrent protection IP67	
Environment resistance	Operating Temp./Humid. Storage Temp./Humid.	-10-45°C / 35-85% RH (without freezing or condensation) -20 ~ 60°C / 35 ~ 85% RH (without freezing or condensation)	
	Ambient illuminance Vibration resistance Shock resistance	Incandescent lamp: 5,000 lx or less 10-55Hz, Double amplitude 1.5mm, 2 hours in each X,Y,Z direction 500m / s ² (Approx. 50G) 3 times in each X,Y,Z direction	
Material		Case : Aluminum die - cast, Front cover: PPSU, Display: PET, Cable: UL proof PVC	
Applicable regulations	EMC Environment Safety	EMC Directive (2014/30/EU) RoHS Directive (2011/65/EU), China RoHS (MIIT Order No. 32) 21 CFR 1040.10, 1040.11 (excluding differences specified in Laser Notice No. 50)	
Applicable standards		EN 60947-5-2:2007 / A1:2012, IEC 60825-1:2007	
Mass		Approx. 90g (Cable type) / Approx. 30g (M12 Connector type)	


The specifications are based on the following conditions unless otherwise designated:
Ambient temperature: 23°C (Normal temperature), Power voltage 24 VDC, Sampling interval: 500 μs, Averaging: 512 times, Measuring distance: Center of measurement range (BGS-HDL05T: 35mm, BGS-HDL25T2: 150mm), Measuring object: Our standard work (white ceramic plate)

- ※ 1 Sampling period: 1000 μs
- ※ 2 Hysteresis setting: 0.02 (BGS-HDL05T), 0.2 (BGS-HDL25T2)
- ※ 3 In accordance with the FDA provisions of Laser Notice No. 50, the laser is classified as Class 1 or Class 2 per the IEC 60825-1 standard.
- ※ 4 Defined by light strength within 1/e² (13.5%) of spot center. There may be light at outside of the specified spot size. The sensor may be affected when there is a highly reflective object at that light area.
- ※ 5 Input Filter (Fixed) : 8ms
- ※ 6 No.1 output / No.2 output load current are not included.


Outside dimensions

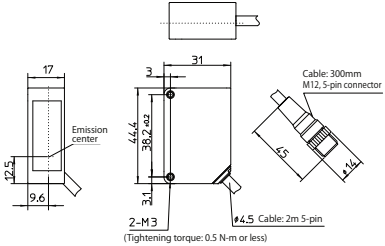

Functions of components

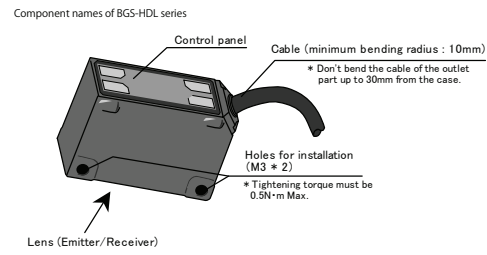

Control panel

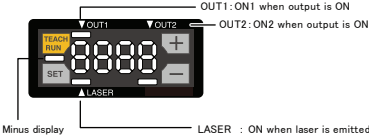


Basic operation

The following shows the basic operation and how to shift the screens of BGS-HDL series. Pressing the TEACH/RUN button less than 2 seconds will restore the Normal screen even in the Setup screen. Press the TEACH/RUN button less than 2 seconds even after setting is complete. When in Setup Mode or Threshold Adjustment Mode, if the button is not touched for 30 seconds the displayed/chosen parameter will be set, and the display will revert to Default Display.

1. Teaching Function

Press the "TEACH/RUN" button for 2 seconds or more, to go to "Teaching Mode". Please refer to the Parameter Description about Teaching.

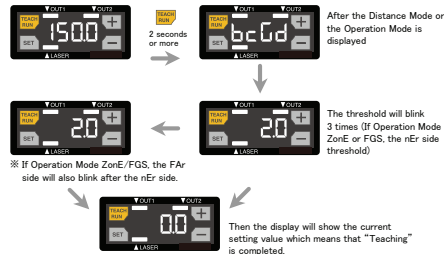

Before setting the Teach function, please choose Distance Display Mode settings: bcGd/trGt, and for Output1/Output2 settings: L on/4 on/Zone/FGS. Refer to Setup Mode/Extension Mode at the back of this instruction manual, please set necessary parameters.

2. Parameter Display and Setup


Press the "SET" button for 2 seconds or more to go to the Parameter Display. Refer to the Parameter Description for each setting.



In Teaching mode, you can't just set the threshold Output2. But you can edit the already set or the default threshold for Output2 along with Output1. Also, you can adjust it manually based on the values (distances) as described below.


3. "Threshold" Adjustment

Press the "+" or "-" buttons each for 2 seconds or more, then go to the "Threshold" adjustment display. ※ The display will be changed by Output setting.

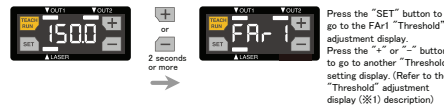


Setup Mode

The following shows the order to display the setting items when "+" button is pressed. The order will reverse when "-" button is pressed. (*) shows the default of each setting item.)

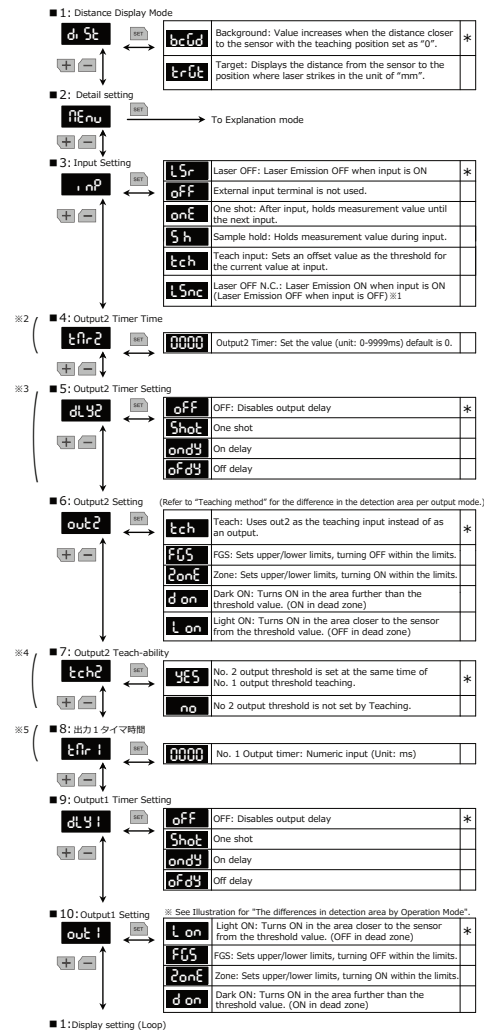

Extension Mode

Select "Menu" in the Setup mode to enter the Explanation mode (* shows the default of each setting item.)

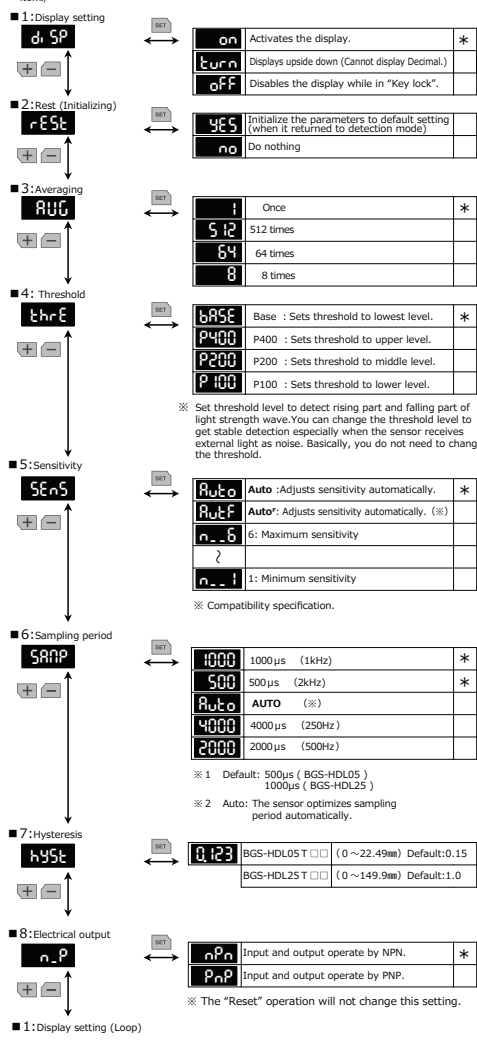

Other function

The following other function is provided.


● Keylock function

● Activating keylock
While it's RUN mode, press [Keylock] a time for 1 second or more. Then, [Loc] will be shown.
● When Keylock is activated, any access except "Release Keylock" will be neglected.
※ In the Setup mode, press [Keylock] to enter the Run mode.


● Resetting keylock

While Key lock is activated, it will be released by pressing [Keylock] at a time for 3 seconds or more. Then, [Loc] will be shown.
After this process, keylock is released and every access will be accepted.

Operation Mode

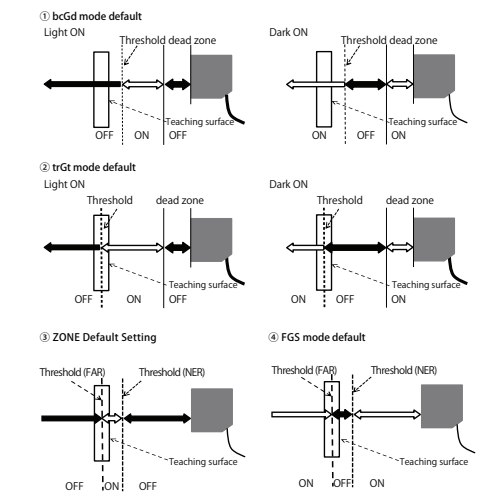

Teaching distance and Default

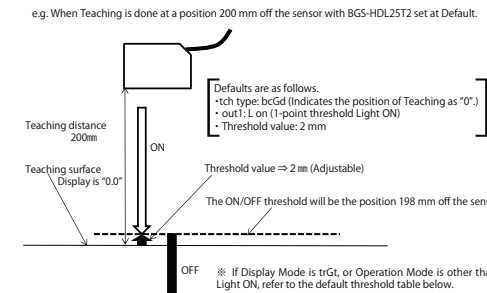

Resetting threshold value

Output threshold (numeric) can be set freely. Teaching is done based on the threshold value set here. The following shows the defaults before changing. The values in paren. () show the defaults shown by the distance from the sensor.

BGS-HDL05 T □□			
Threshold default	AdJ	FAr	nEr
bcGd mode	L on	2.0mm (248mm)	—
	d on	2.0mm (248mm)	—
	FGS	—	2.0mm (248mm)
trGt mode	L on	252mm	—
	d on	252mm	—
	FGS	—	252mm

※ In bcGd mode, the value (in brackets) is the distance from the sensor.

BGS-HDL05 T □□			
Threshold default	AdJ	FAr	nEr
bcGd mode	L on	0.5mm (49.5mm)	—
	d on	0.5mm (49.5mm)	—
	FGS	—	0.5mm (49.5mm)
trGt mode	L on	50.5mm	—
	d on	50.5mm	—
	FGS	—	50.5mm

※ In bcGd mode, the value (in brackets) is the distance from the sensor.


Functions of components

Component names of BGS-HDL series					
1ch setting	2ch setting	1ch threshold name	1ch threshold name	2ch threshold name	2ch threshold name
① L/D on	tch	None	—	—	—
② Zone/FGS	tch	FAr	nEr	—	—
③ L/D on	ADJ1	—	—	ADJ2	—
④ L/D on	Zone/FGS	ADJ1	—	FAr2	nEr2
⑤ L/D on	L/D on	FAr1	nEr1	ADJ2	—
⑥ Zone/FGS	Zone/FGS	FAr1	nEr1	FAr2	nEr2

For ①, if "+" or "-" button is long-pressed, "Threshold name" will flash, and the value can be adjusted by pressing "+" or "-" button again. After adjusting the value, press the SET button. Then, the Threshold value is entered.



For ③, if "+" or "-" button is long-pressed, "1ch threshold name" will flash. When "+" or "-" button is pressed with the "1ch threshold name" displayed, a different "1ch threshold name" is displayed. By pressing the SET button when an intended "Threshold name" is displayed, the value of the threshold name flashes. By pressing "+" or "-" button when the threshold value of a threshold name is flashing, the value can be adjusted. After adjusting the value, press the SET button. Then, the Threshold value is entered and the display will return to the "Threshold name".

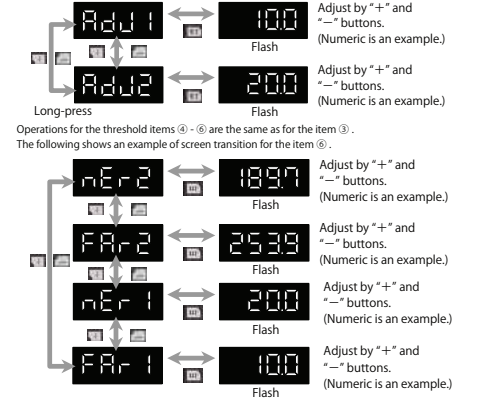


In any case, pressing the TEACH/RUN button after adjusting a threshold value will restore the Normal screen. Also, in all cases, if the TEACH/RUN button is pressed without pressing the SET button after the threshold value adjustment, the threshold value which is finally displayed is entered, and the screen returns to the normal screen.

Differences in display values depend on Distance Display Mode


● When Distance Display Mode is "bcGd (Background)"

The position 250mm off the sensor is "0.0" for the 250mm type while the position 50mm off the sensor is "0.0" for the 50mm type. (The distance will be 0.0 or 0.00 after Teaching)
The Numeric display will be in millimeters, up to one digit (two digits for 50mm type). The value will become greater nearing the sensor.
This is a useful display for detecting workpieces on surfaces. (ex. on a conveyor belt)

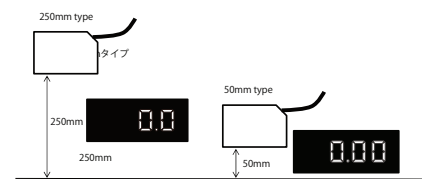

● When Teaching method is "trGt (Target)"

In both 250mm and 50mm types, the distance from the sensor is displayed. Use this function to display the distance from the sensor to the detection target.

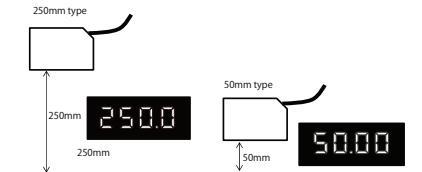

- * 1 The light receiving part operates even if the laser is OFF, therefore the Output Function (of the sensor) may operate due to incoming light such as ambient light. (test function) Please take countermeasures on the control side if you do not want the sensor to operate Output Function when the laser is OFF.
- * 2 In case Output2 Timer is "OFF", no display.
- * 3 In case Output2 setting is on "Teach", no display.
- * 4 In case Output2 setting is on "Teach", no display.
- * 5 In case the Output1 Timer setting is "OFF", no display.