

Safety Control Unit

SF-C21

Related Information	■ General terms and conditions..... F-3	■ SF4D..... P.459~
	■ SF4B / SF4B-G P.501~	■ SF4B-C P.545~
	■ SF2B P.603~	■ General precautions P.1595



**Got questions on how the SF-C21 can enhance your safety protocols while optimizing productivity?
Contact the experts at Ramco today!**

Category 4 PLe SILCL3

panasonic.net/id/pidsx/global

The control category differs depending on the configuration and wiring of the external circuit.

Creating safety circuits is easier than ever

Finding space to install and wire is easy


**One SF-C21 can do the work of four safety relay units.
Simple to wire the units in the control panel!**



Combining multiple units together requires complicated wiring and time-consuming checking!



Just one SF-C21 does the job!



Easy to monitor status with a general-purpose PLC



Four auxiliary outputs (PNP semiconductor output) are provided. Using RS-485 communications (MODBUS RTU), various general-purpose control units (PLC, HMI, etc.) can monitor the **SF-C21** information such as the status, the selected logic, and any error status.

Note: Communication information can not be used for safety control.

Small, so the unit can be installed in a narrow space

Compact with a height 97 mm **3.819 in** × width 45 mm **1.772 in**.
It's easy to find installation space for the **SF-C21** unit.

Long-life semiconductor output (PNP) adopted for control output and auxiliary output

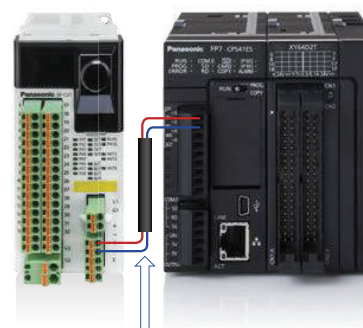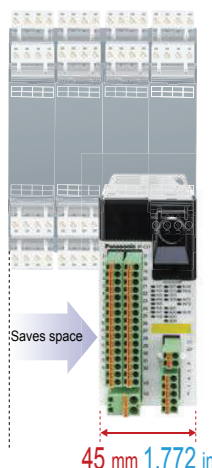

Shielded twisted pair cable

Absolutely no programming skills required.
Operation is easy - just select a preset logic

Simply turn a switch to set

Eight preset logics, safety-certified and compatible up to control category 4 PLe, can be selected by simply turning the rotary switch.

8 preset logics

1 Overall stop control	5 Partial stop control 2
2 Parallel muting control	6 Two-hand control
3 Sequential muting control	7 OR control
4 Partial stop control 1	8 Operation mode selection control

* The logic customized by user can be stored in the logic No. 0.

Easy to set the “OFF delay”

The OFF delay time can be easily set by simply turning the rotary switch to any one of patterns.

Pattern No.	0	1	2	3	4	5	6	7	8	9
OFF delay time (sec.)	0	0.1	0.5	1	2	5	10	15	30	60


* The OFF delay time applies to control output 2. In case of setting the OFF delay time to control output 1, the “Configurator SF-C” software is needed.

Password protection prevents inadvertent logic changes

Application-based customization is easy

Easy to create a reliable safety circuit



Use our “Configurator SF-C” software to build your own safety circuits of connected devices, control logic, output modes, etc. No programming skills required!

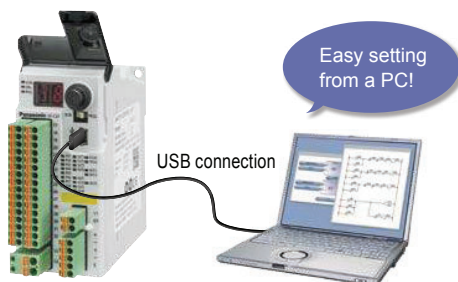

Customized logics are safety-certified too!

All possible logic combinations created with the “Configurator SF-C” software are already safety-certified by the certification bodies. The software also has a “simulation mode” to test if the prepared logic and safety circuit operates as intended. If the logic is not complete, the software will block its transfer to the SF-C21 unit.

Note: Please read the instruction manual in advance when selecting or creating logics, and verify whether the combination of connecting devices and logics complies with each machine safety standard.

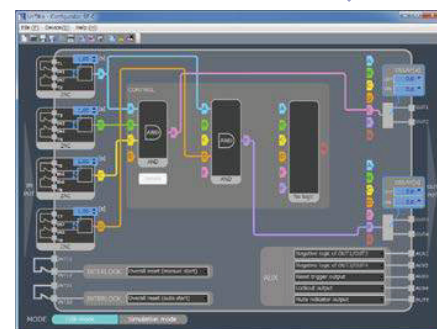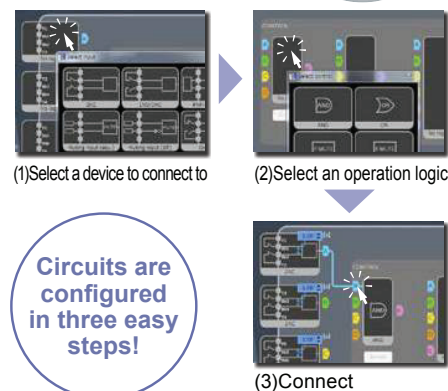

FIBER
SENSORS

LASER
SENSORS

PHOTOELECTRIC
SENSORS

MICRO
PHOTOELECTRIC
SENSORS

AREA
SENSORS

SAFETY LIGHT
CURTAINS /
SAFETY COMPONENTS

PRESSURE /
FLOW
SENSORS

INDUCTIVE
PROXIMITY
SENSORS

PARTICULAR
USE SENSORS

SENSOR
OPTIONS

SIMPLE
WIRE-SAVING
UNITS

WIRE-SAVING
SYSTEMS

MEASUREMENT
SENSORS

STATIC
CONTROL
DEVICES

LASER
MARKERS

PLC

HUMAN MACHINE
INTERFACES

ENERGY
MANAGEMENT
SOLUTIONS

FA COMPONENTS

MACHINE VISION
SYSTEMS

UV CURING
SYSTEMS

Selection
Guide
Safety Light
Curtains
Safety
Control Units
Safety
Components

SF-C21

SF-C10


“Configurator SF-C” can be downloaded free of charge from our website.

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS/
SAFETY COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC


HUMAN MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONS

FA COMPONENTS

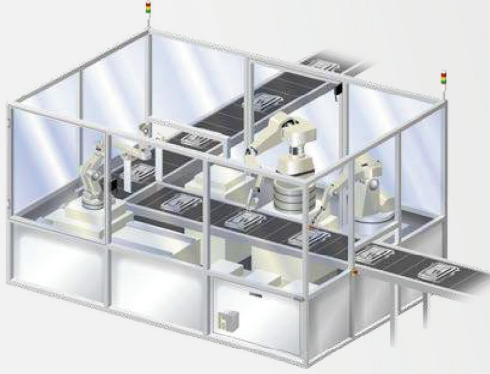
MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideSafety Light
CurtainsSafety
Control UnitsSafety
Components**SF-C21****SF-C10****8 preset logics compatible up to control category 4, PLe standards**


Overall stop control

When any connected input becomes OFF, the entire control output will be OFF.

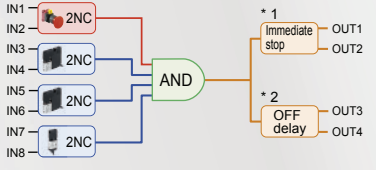


* 1 The delay time can be set using the **Configurator SF-C**.
* 2 The initial OFF delay is set to 0 seconds.

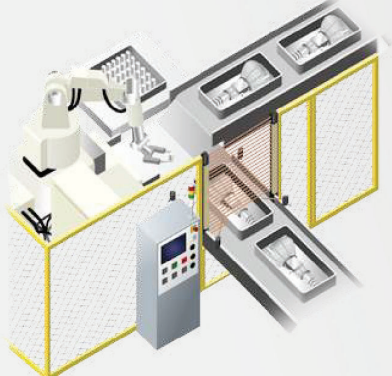


Parallel muting control

When the muting input becomes ON, the safety light curtain will be temporarily disabled.

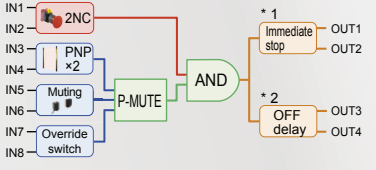


* 1 The delay time can be set using the **Configurator SF-C**.
* 2 The initial OFF delay is set to 0 seconds.

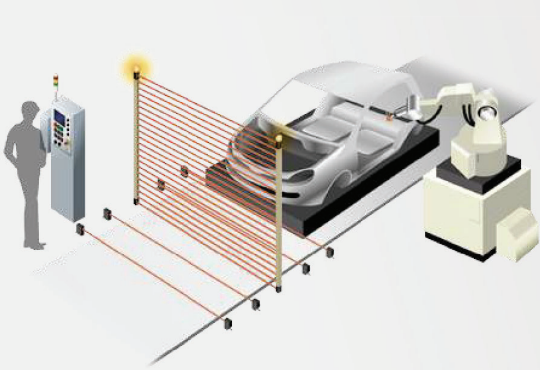

Sequential muting control

Only when the muting input becomes ON following a predefined sequence, the safety light curtain will be temporarily disabled.

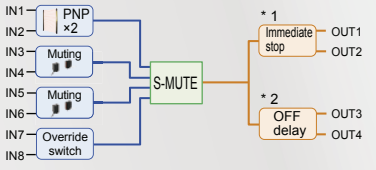


* 1 The delay time can be set using the **Configurator SF-C**.
* 2 The initial OFF delay is set to 0 seconds.



Partial stop control 1

When the emergency stop input is OFF, the entire control output will be OFF. When any other input is OFF, its corresponding control output will be OFF.

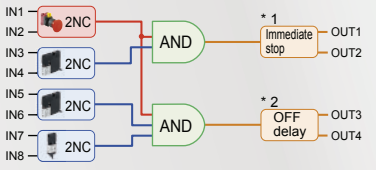


* 1 The delay time can be set using the **Configurator SF-C**.
* 2 The initial OFF delay is set to 0 seconds.




Partial stop control 2

When the emergency stop input or the input from the back-end process becomes OFF, the entire control output will be OFF. When the input from the front-end process becomes OFF, only its corresponding control output will be OFF.

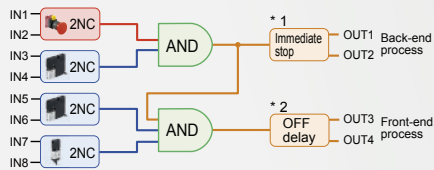


* 1 The delay time can be set using the **Configurator SF-C**. * 2 The initial OFF delay is set to 0 seconds.

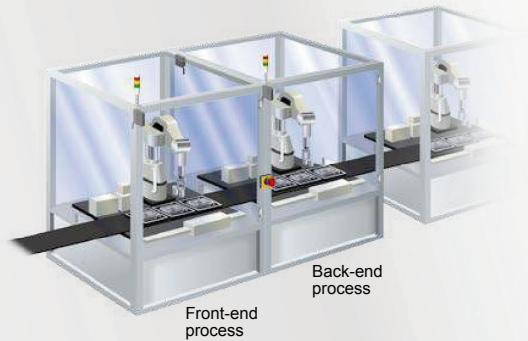


Two-hand control

This control is applied when a two-hand operation switch is used for control. Only when both switches of the two-hand operation switch are operated within 0.5 sec., control output will be ON.

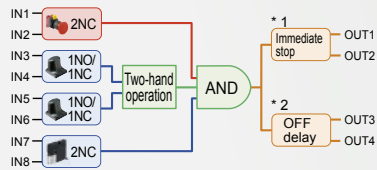


* 1 The delay time can be set using the **Configurator SF-C**.
* 2 The initial OFF delay is set to 0 seconds.

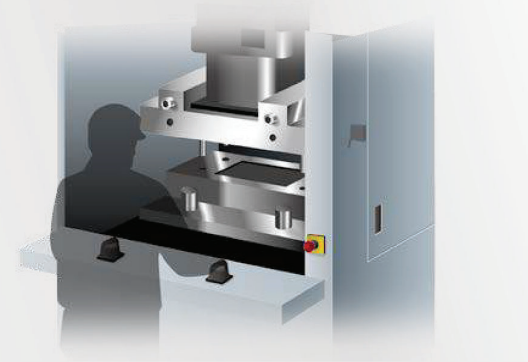


OR control

Even when the guard (input A) is OFF, if the enabling switch is ON the control output will be ON. If either the emergency switch or input B becomes OFF, the entire control output will be OFF regardless of the status of the input A and emergency switch.

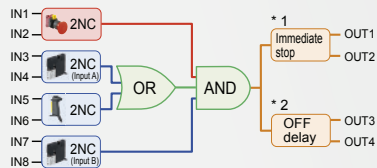


* 1 The delay time can be set using the **Configurator SF-C**. * 2 The initial OFF delay is set to 0 seconds.

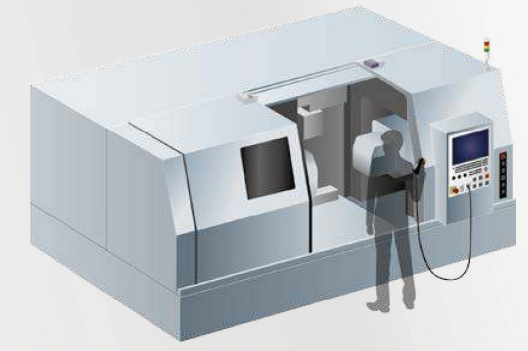

Operation mode selection control

Only when mode selection using the key selector is followed by the enabling switch being turned ON, the control output will be ON regardless of the open / close status of the guard. Note that if the emergency stop switch is OFF, the entire control output will be OFF.

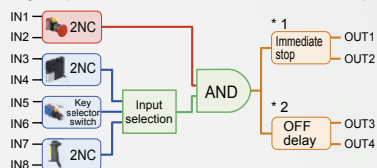

* 1 The delay time can be set using the **Configurator SF-C**. * 2 The initial OFF delay is set to 0 seconds.



FIBER
SENSORS

LASER
SENSORS

PHOTOELECTRIC
SENSORS

MICRO
PHOTOELECTRIC
SENSORS

AREA
SENSORS

SAFETY LIGHT
CURTAINS/
SAFETY COMPONENTS

PRESSURE /
FLOW
SENSORS

INDUCTIVE
PROXIMITY
SENSORS

PARTICULAR
USE SENSORS

SENSOR
OPTIONS

SIMPLE
WIRE-SAVING
UNITS

WIRE-SAVING
SYSTEMS

MEASUREMENT
SENSORS

STATIC
CONTROL
DEVICES

LASER
MARKERS

PLC

HUMAN MACHINE
INTERFACES

ENERGY
MANAGEMENT
SOLUTIONS

FA COMPONENTS

MACHINE VISION
SYSTEMS

UV CURING
SYSTEMS

Selection
Guide
Safety Light
Curtains
Safety
Control Units
Safety
Components

SF-C21

SF-C10

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS /
SAFETY COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONS

FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideSafety Light
CurtainsSafety
Control UnitsSafety
Components**SF-C21****SF-C10**

Software tool Configurator SF-C

Enable flexible customization

The software provides highly flexible customization. You can create a logic of your own, change the input device types based on the preset logics, or customize logic data uploading from the **SF-C21** main unit. Changing the auxiliary output settings, as well as setting the ON delay / OFF delay time and muting state holding time are all very easy as well. Created logics can be stored in a PC for convenient future use.

Settable items

- Input device selection
- Logic selection (up to three layers)
- Reset mode selection (auto / manual, overall / partial)
- Auxiliary output settings [Linkage to control output (positive logic and negative logic), monitor output of safety input, reset trigger output, lockout output, etc.]
- OFF delay time setting (0.0 to 60.0 sec, in 1/10 sec.)
- ON delay time setting [1 to 5,940 sec (99 min), in sec.]
- Muting valid time setting [1 to 5,940 sec (99 min), in sec.] or no limit
- Override valid time setting (1 to 600 sec, in sec.)
- RS-485 (MODBUS RTU) communication settings, etc.

Multilingual compatibility

The **Configurator SF-C** supports seven languages: Japanese, English, Chinese, Spanish, French, Italian and Portuguese. Our products support users around the world by fulfilling their diverse needs, such as the empowerment of local staff and implementation of local safety schemes.



Versatile functions

Input filter time setting

- OFF-ON filter: Avoid unstable operation caused by vibrations and/or bounce-back when closing guards.
- ON-OFF filter: Avoid unstable operation due to momentary blockages of a safety light curtain by operational vibrations, bugs, dust, and other causes.

Status monitoring function

The status of input and output devices connected to **SF-C21** can be monitored in real time through USB.

Simulation function

Whether the logic created by the user operates as intended can be verified via a software tool.

Incomplete transfer blocking function

The transfer of incomplete logics to **SF-C21** will be blocked and prevent potential hazards.


Problem

I want to use a safety light curtain and a magnetic switch, but can't find a suitable preset logic...



Solution

Use the AND control, a preset logic, as the base and change part of the safety input to a safety light curtain (PNP × 2) and a safety magnetic switch (1NO / 1NC).

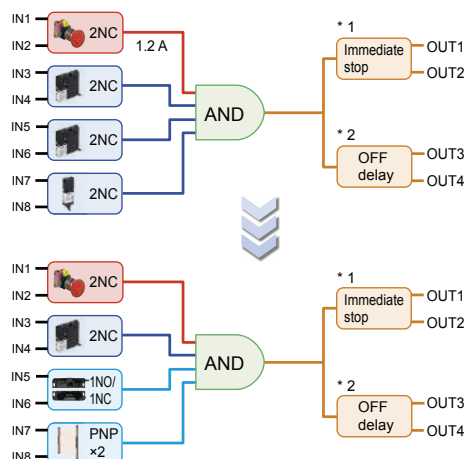


- * 1 The delay time can be set using the **Configurator SF-C**.
- * 2 The initial OFF delay is set to 0 seconds.

Note: Please read the instruction manual in advance when customizing logics, and verify whether the combination of connecting devices and logics complies with each machine safety standard.

"Configurator SF-C" can be downloaded free of charge from our website.

ORDER GUIDE

Product name	Appearance	Model No.	Number of input points		Number of output points	
			Safety input	Reset / EDM input	Control output	Auxiliary output
Safety control unit		SF-C21	2 × 4	2	2 × 2	4

SPECIFICATIONS

Product name		Safety control unit				
Item	Model No.	SF-C21				
		IEC 61508-1 to 7, EN 61508-1 to 7(SIL3), ISO 13849-1 (Up to Category 4, PL _e), IEC 61131-2, IEC 61010-2-201, IEC 62061(SILCL3), UL 61010-1, UL 61010-2-201, UL 1998 IEC 61000-6-2, IEC 61326-3-1, EN 55011				
Applicable standards	Safety EMC	Machinery Directive, EMC Directive, RoHS Directive				
CE marking directive compliance		IEC 60947-1, IEC 60947-5-1, IEC 60947-5-2, IEC 60947-5-5, IEC 60947-5-8, IEC 61496-1, IEC TS 62046, ISO 13851				
Related standards		IEC 60947-1, IEC 60947-5-1, IEC 60947-5-2, IEC 60947-5-5, IEC 60947-5-8, IEC 61496-1, IEC TS 62046, ISO 13851				
Supply voltage (Note 1, 2)	Power supply for internal	24 V DC $\pm 10\%$ % Ripple P-P10 % or less				
	Power supply for external	24 V DC $\pm 10\%$ % Ripple P-P10 % or less				
Current consumption (Note 1, 2)	Power supply for internal	200 mA or less				
	Power supply for external	100 mA or less				
Safety input (IN1 to IN8)		2 × 4 inputs, Rated voltage: Same as the voltage of the power supply for internal				
	ON level / OFF level	Input voltage: 18 V, Input current: 3.5 mA / Input voltage: 5 V, Input current: 1.0 mA				
	Rated input current / Input impedance	5 mA approx. / 4.7 K Ω approx.				
	Duration of detectable ON state	10 ms or more				
	Duration of undetectable OFF state	0.7 ms or less				
Control output (OUT1 to OUT4)		PNP open-collector transistor with 2 outputs × 2 • Maximum source current: 300 mA / output • Residual voltage: 2.5 V or less				
	Output mode	• Applied voltage: Same as the voltage of the power supply for external • Leakage current: 100 μ A or less (Including power supply OFF condition) True: ON, False: OFF				
	ON delay function / OFF delay function	Incorporated / Incorporated				
	Short-circuit protection / Response time	Incorporated / OFF response: 10 ms or less, ON response: 100 ms or less				
Auxiliary output (AUX1 to AUX4) (Non-safety output)		PNP open-collector transistor with 1 output × 4 • Maximum source current: 60 mA / output • Residual voltage: 2.5 V or less				
	Output mode (Factory defaults)	AUX1: Negative logic of OUT1 / OUT2 (ON when OUT1 / OUT2 is OFF) AUX2: Negative logic of OUT3 / OUT4 (ON when OUT3 / OUT4 is OFF) AUX3: Reset trigger output (ON under reset release wait condition) AUX4: Lockout output (OFF when lockout)				
	Output mode (Any of the auxiliary outputs can be customized using the software tool)	Negative logic of OUT1 / OUT2 (ON when OUT1 / OUT2 is OFF) Negative logic of OUT3 / OUT4 (ON when OUT3 / OUT4 is OFF) Positive logic of OUT3 / OUT4 (ON when OUT3 / OUT4 is ON) Outputs A, B, C, and D of diagnosis results of input blocks (ON when logic is true) Outputs E, F, and G of internal logic circuit diagnostic results (ON when logic is true) Reset trigger output (ON under reset release wait condition) Lockout output (OFF when lockout) Muting indicator output (ON when muting / override) Monitor output in response to IN1 to IN8 (ON when input) No output (normally OFF)				
	Short-circuit protection / Response time	Incorporated / 10 ms or less				
Muting indicator output		Semiconductor photo MOS relay output × 1 • Maximum load current: 60 mA • Residual voltage: 2.5 V or less				
	Output mode	• Supply voltage: Same as the voltage of the power supply for internal • Leakage current: 100 μ A or less (Including power supply OFF condition) ON when muting / override				
	Short-circuit protection / Response time	Incorporated / 10 ms or less				
Interlock function / Lockout release function		Incorporated / Incorporated				
External device monitor function		Incorporated				
Communication function (MODBUS RTU)		Interface: RS-485, Protocol: MODBUS RTU, Maximum transmission distance: 100 m 328.084 ft , Maximum number of units that can be connected: 8 units (slaves)				
Logic selection function		No.0: Customization control No.1: Overall stop control No.2: Parallel muting control No.3: Sequential muting control No.4: Partial stop control 1 No.5: Partial stop control 2 No.6: Two-hand control No.7: OR control No.8: Operation mode selection control				
Logic setting function		Input mode, control mode, output mode, reset mode, auxiliary output mode				
Pollution degree / Excess voltage category		2 / II				
Usable altitude (Note 3)		2,000 m 6561.680 ft or less				
Startup time after power on		2 sec. or less				
PFH _d (Note 4) / MTTF _d (Note 4)		9.73 × 10 ⁻¹⁰ / More than 100 years				
Environmental resistance	Degree of protection	IP20 (IEC) (must be installed in a control panel with protection IP54 or higher)				
	Ambient temperature	-10 to +55 °C +14 to +131 °F (No dew condensation or icing allowed), Storage: -25 to +60 °C -13 to +140 °F				
	Ambient humidity	30 to 85% RH, Storage: 30 to 85% RH				
	Dielectric strength voltage / Insulation resistance	1,000 V AC for one min / 20 M Ω , or more, with 500 V DC megger (All inputs connected together - USB port, all inputs connected together - RS-485 port, USB port - RS-485 port, between all supply terminals connected together and enclosure, all outputs connected together - all input connected together, all outputs connected together - USB port, all outputs connected together - RS-485 port)				
	Vibration resistance	5 to 8.4 Hz frequency, 3.5 mm 0.138 in half amplitude, 8.4 to 150 Hz frequency, Acceleration 9.8 m/s ² (1 G), in X, Y and Z directions for two hours each (IEC/EN 60068-2-6)				
Shock resistance		147 m/s ² (15 G) 11 ms in X, Y and Z directions three times each (IEC/EN 60068-2-27)				
Connection method		Input / output and power supply: Detachable spring cage terminal blocks, RS-485: Detachable spring-cage terminal block, USB: Mini-B male				
Maximum cable length		100 m 328.084 ft or less				
Material		Main unit enclosure: Polycarbonate / ABS polymer alloy, Enclosure: Polycarbonate				
Weight		Net weight: 190 g approx., Gross weight: 320 g approx.				

Notes: 1) "Power supply for internal" is the power supply for safety input. "Power supply for external" is the power supply for control output / auxiliary output. The power supplies for internal and external are insulated.

2) The power supply unit connected to this device must satisfy the conditions below.

- Output voltage within 20.4 V to 26.4 V DC (Ripple P-P: 10% or less.)
- Power supply unit SELV (safety extra low voltage) / PELV (protected extra low voltage) conforming to the EMC Directive and Low-voltage Directive (In case CE Marking conformity is required.)
- Power supply unit conforming to the Low-voltage Directive and with an output of 100 VA or less
- Power supply unit with an output holding time of 20 ms or more.
- Power supply unit corresponding to CLASS 2 (In case C-TÜV US Listing Mark conformity is required.)

3) Do not use or store this device in a pressurized environment beyond the atmospheric pressure at sea level.

4) PFH_d: Probability of dangerous failure per hour, MTTF_d: Mean time to dangerous failure (in years)

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC PROXIMITY DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY MANAGEMENT SOLUTIONS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide


Safety Light Curtains

Safety Control Units

Safety Components

SF-C21**SF-C10**

TERMINAL ARRANGEMENT DIAGRAM

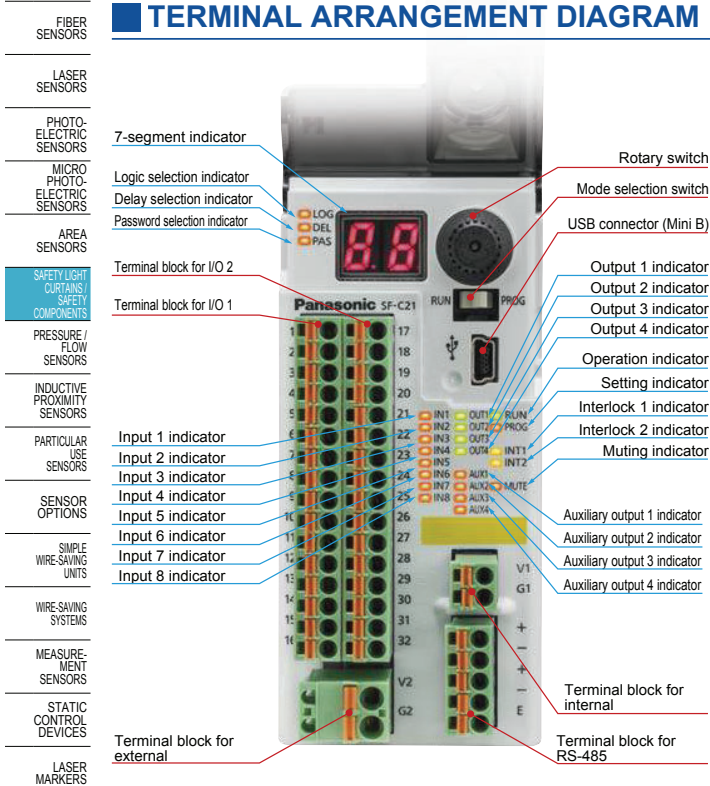

Terminal block name	Terminal No.	Terminal name	Function
Terminal block for I/O 1	1	IN1	Safety input 1
	2	T1	Safety input 1 / test output
	3	IN2	Safety input 2
	4	T2	Safety input 2 / test output
	5	IN3	Safety input 3
	6	T3	Safety input 3 / test output
	7	IN4	Safety input 4
	8	T4	Safety input 4 / test output
	9	MUTE1	Muting indicator output 1_1
	10	NC	Not connected
	11	INT11	Reset input 1 / test output
	12	INT12	Reset input 1
	13	AUX1	Auxiliary output 1
	14	AUX2	Auxiliary output 2
	15	AUX3	Auxiliary output 3
	16	AUX4	Auxiliary output 4

Power supply for external	V2	V2	Power supply for control output / power supply for auxiliary output (+V)
	G2	G2	Power supply for control output / power supply for auxiliary output (0V)

Terminal block name	Terminal No.	Terminal name	Function
Terminal block for I/O 2	17	IN5	Safety input 5
	18	T5	Safety input 5 / test output
	19	IN6	Safety input 6
	20	T6	Safety input 6 / test output
	21	IN7	Safety input 7
	22	T7	Safety input 7 / test output
	23	IN8	Safety input 8
	24	T8	Safety input 8 / test output
	25	MUTE2	Muting indicator output 1_2
	26	NC	Not connected
	27	INT21	Reset input 2 / test output
	28	INT22	Reset input 2
	29	OUT1	Control output 1
	30	OUT2	Control output 1
	31	OUT3	Control output 2
	32	OUT4	Control output 2

Power supply for internal	V1	V1	Power supply for safety input (+V)
	G1	G1	Power supply for safety input (0V)

RS-485	+	+	Transmission line (+)
	-	-	Transmission line (-)
	+	+	Transmission line (+)
	-	-	Transmission line (-)
	E	E	Terminal station setting


Note: For an input device requiring a separate power supply, such as a safety light curtain, use the same power supply as the power supply for internal.

RS-485 (MODBUS RTU) SPECIFICATIONS

With built-in RS-485, **SF-C21** can read out its status, error history, etc. to an external device such as a general-purpose PLC, using the MODBUS RTU protocol.

Up to eight **SF-C21** units can communicate with the external device as the master station.

The communication preference of MODBUS RTU is set with the DIP switch on the main unit or the software tool "Configurator SF-C".

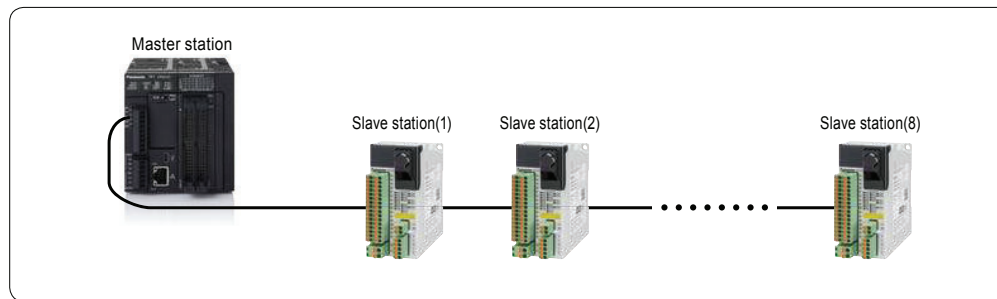

SF-C21

SF-C10

Types of data that can be read out

- Status (HIGH, LOW) of safety input and reset / EDM output
- Status (HIGH, LOW) of control output, auxiliary output, and muting indicator output
- Lockout history
- Logic No. change history

MODBUS RTU SPECIFICATIONS

Interface	RS-485
Max. transmission distance	100 m 328.084 ft
Communication address	1-247
Data length	8 bits (fixed)
Parity bit	Without / Odd / Even
Stop bit	1 bit / 2 bits
Communication speed	9,600 bps
	19,200 bps
	38,400 bps
	57,600 bps
	115,200 bps

MAIN BODY DIP SWITCH SPECIFICATIONS


Switch No.	Setting item	Input status	
		OFF	ON
1	Communication preference settings	DIP switches take precedence	Software tools take precedence
2	Parity bit presence	With	Without
3	Parity bit type	Odd	Even
4	Stop bit	1	2
5	Communication address 1	SW5: OFF, SW6: OFF	
	Communication address 2	SW5: ON, SW6: OFF	
6	Communication address 3	SW5: OFF, SW6: ON	
	Communication address 4	SW5: ON, SW6: ON	
7	Communication speed	9,600 bps	19,200 bps
8	Reserved	—	—
9	Reserved	—	—
10	Reserved	—	—

Note: The **SF-C21** can not be controlled by an external device.


I/O CIRCUIT AND WIRING DIAGRAMS

Connection examples

Logic No.1 Overall stop control (Manual reset mode)

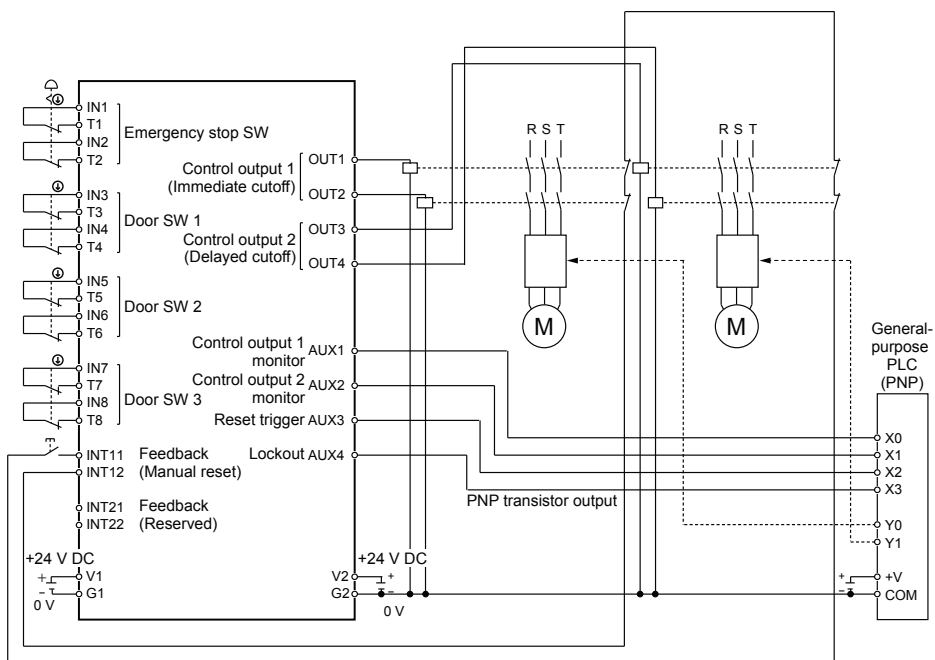

Logic No.1 Overall stop control (Auto reset mode)

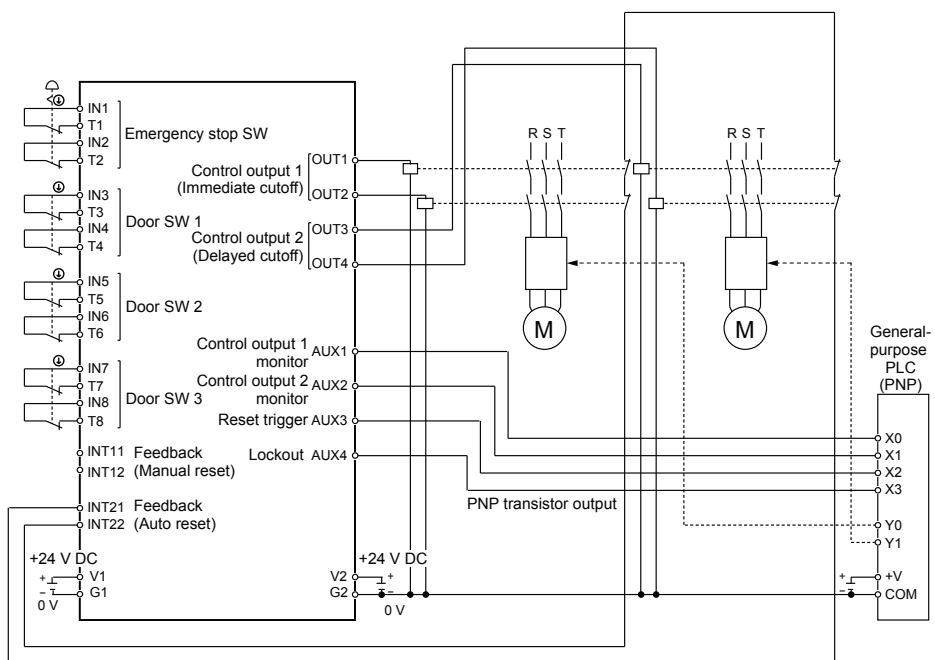

FIBER
SENSORS

LASER
SENSORS

PHOTO-
ELECTRIC
SENSORS

MICRO
PHOTO-
ELECTRIC
SENSORS

AREA
SENSORS

SAFETY LIGHT
CURTAINS /
SAFETY
COMPONENTS

PRESSURE /
FLOW
SENSORS

INDUCTIVE
PROXIMITY
SENSORS

PARTICULAR
USE
SENSORS

SENSOR
OPTIONS

SIMPLE
WIRE-SAVING
UNITS

WIRE-SAVING
SYSTEMS

MEASURE-
MENT
SENSORS

STATIC
CONTROL
DEVICES

LASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACES

ENERGY
MANAGEMENT
SOLUTIONS

FA
COMPONENTS

MACHINE
VISION
SYSTEMS

UV
CURING
SYSTEMS

Selection
Guide

Safety Light
Curtains

Safety
Control Units

Safety
Components


SF-C21

SF-C10


I/O CIRCUIT AND WIRING DIAGRAMS

Connection examples

Logic No.4 Partial stop control 1 (Manual reset mode)

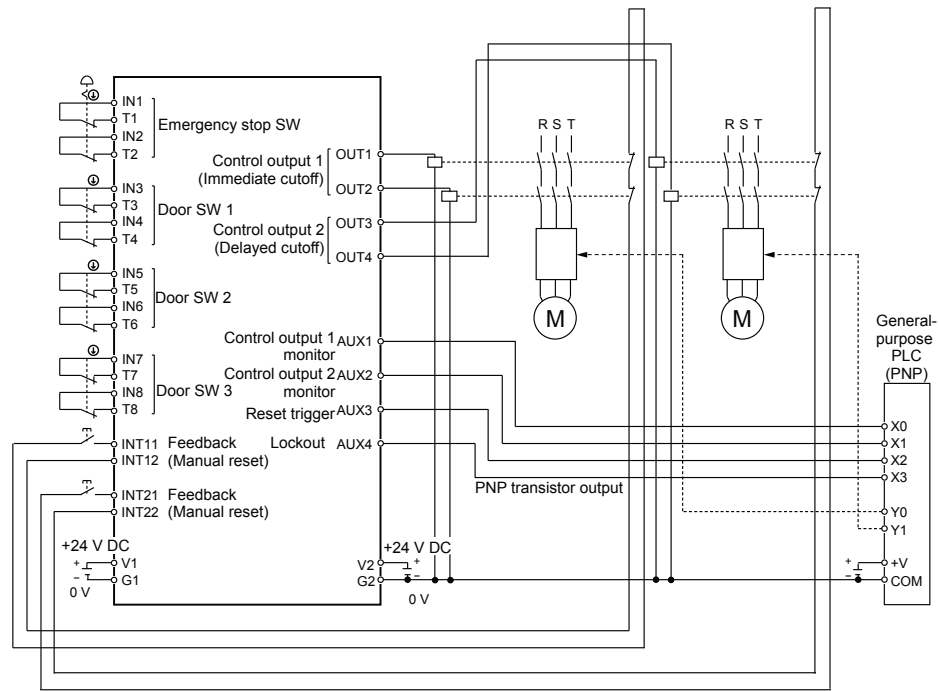

Customization example, based on logic No.4 Partial stop control 1 (Auto reset mode)

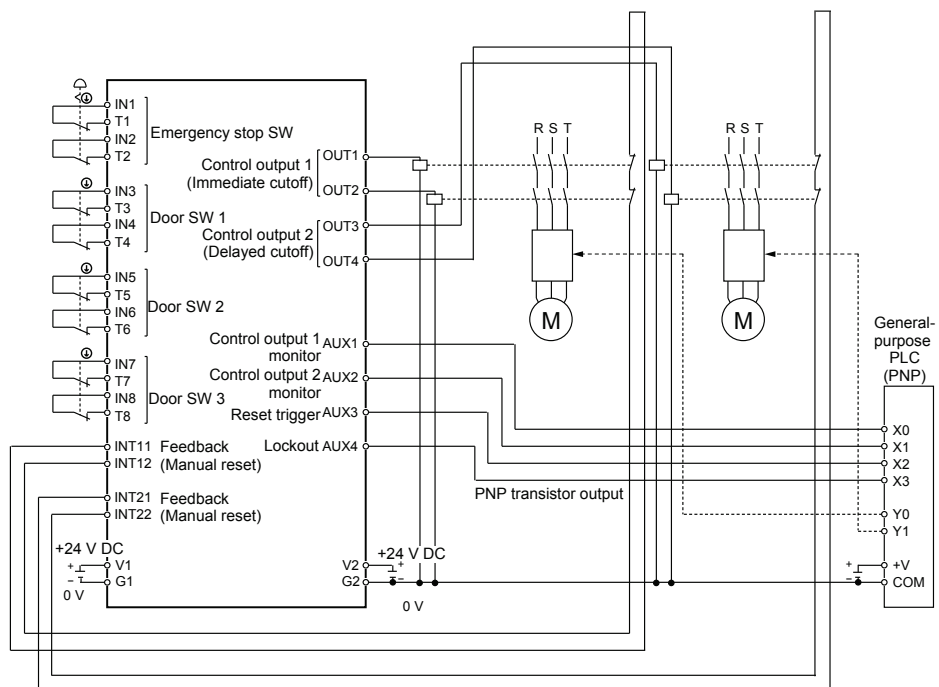FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS


PLC

HUMAN
MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideSafety Light
CurtainsSafety
Control UnitsSafety
Components**SF-C21****SF-C10**


I/O CIRCUIT AND WIRING DIAGRAMS

Connection examples

Customization example, based on logic No.1 Total stop control (Manual reset, when all input devices are changed to PNP input × 2)

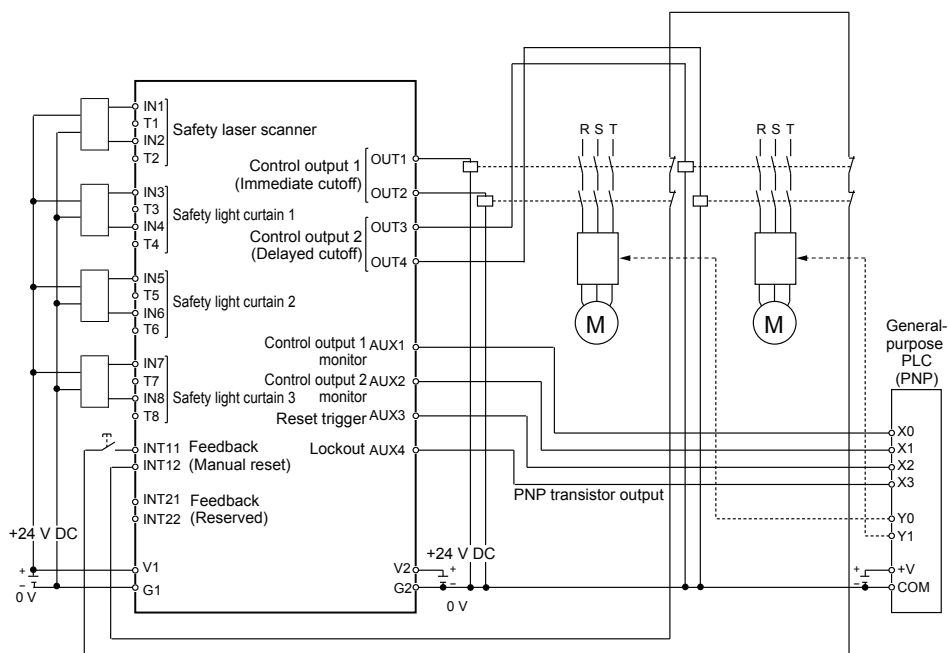

Customization example, based on logic No.1 Total stop control (Manual reset, when input 3 to 8 are changed to devices with 1NC / 1NO)

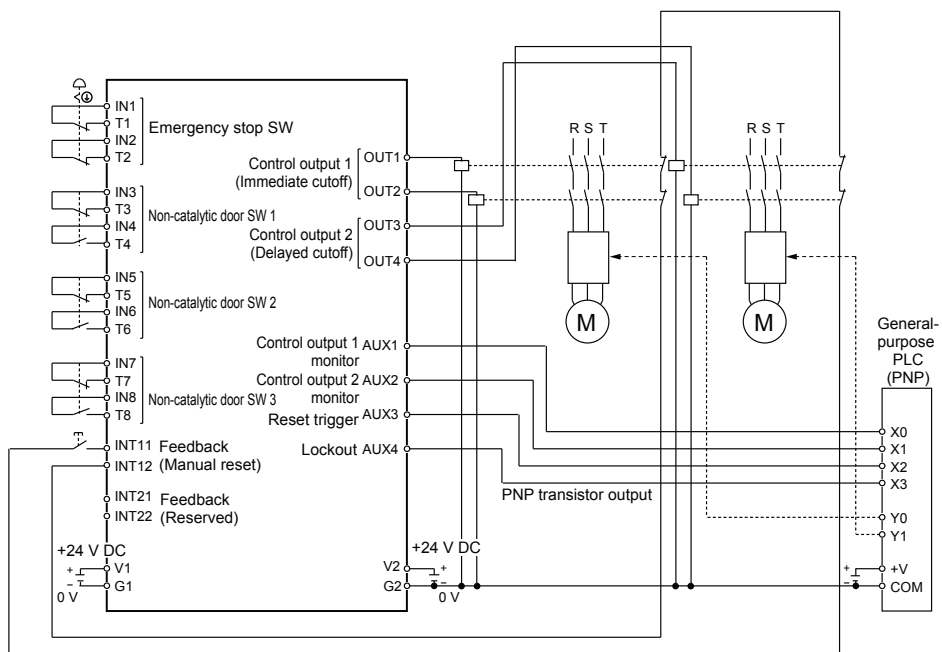

FIBER
SENSORS

LASER
SENSORS

PHOTO-
ELECTRIC
SENSORS

MICRO
PHOTO-
ELECTRIC
SENSORS

AREA
SENSORS

SAFETY LIGHT
CURTAINS/
SAFETY
COMPONENTS

PRESSURE /
FLOW
SENSORS

INDUCTIVE
PROXIMITY
SENSORS

PARTICULAR
USE
SENSORS

SENSOR
OPTIONS

SIMPLE
WIPE-SAVING
UNITS

WIPE-SAVING
SYSTEMS

MEASURE-
MENT
SENSORS

STATIC
CONTROL
DEVICES

LASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACES

ENERGY
MANAGEMENT
SOLUTIONS

FA
COMPONENTS

MACHINE
VISION
SYSTEMS

UV
CURING
SYSTEMS

Selection
Guide


Safety Light
Curtains

Safety
Control Units

Safety
Components

SF-C21

SF-C10


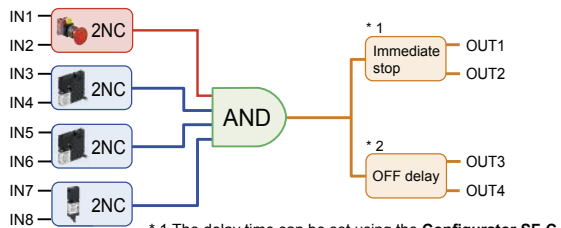
PRESET LOGICS SPECIFICATIONS**Logic No.1 Overall stop control**

	I/O		Details
		Function	
Safety input	IN 1 / IN 2	2NC contact input	
	IN 3 / IN 4	2NC contact input	
	IN 5 / IN 6	2NC contact input	
	IN 7 / IN 8	2NC contact input	
Control output	OUT1 / OUT2	Interlock	Overall reset (auto / manual)
		OFF delay	N/A
	OUT3 / OUT4	Interlock	Overall reset (auto / manual)
		OFF delay	0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (When auto-reset)

ON response: 100 ms or less
OFF response: 10 ms or less

Note: When manually reset, ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.

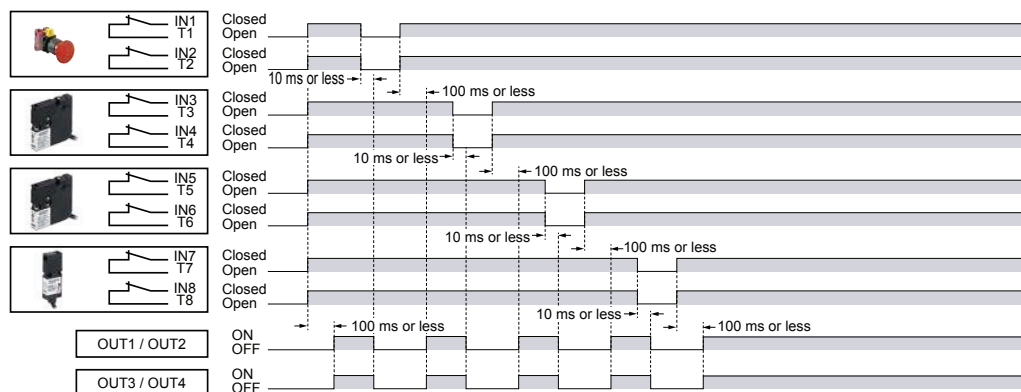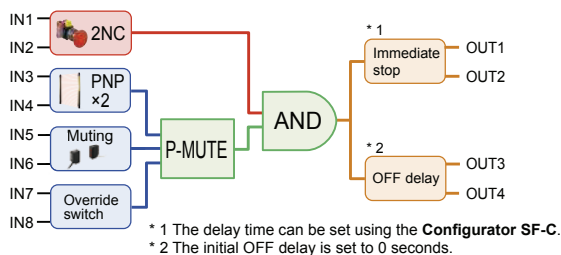
**Logic No.2 Parallel muting control**

	I/O		Details
		Function	
Safety input	IN 1 / IN 2	2NC contact input	
	IN 3 / IN 4	PNP semiconductor input × 2 (equivalence)	
	IN 5 / IN 6	Muting input (equivalence)	
	IN 7 / IN 8	Override input	
Control output	OUT1 / OUT2	Interlock	Overall reset (auto / manual)
		OFF delay	N/A
	OUT3 / OUT4	Interlock	Overall reset (auto / manual)
		OFF delay	0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (When auto-reset)

ON response: 100 ms or less
OFF response: 10 ms or less

Note: When manually reset, ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.

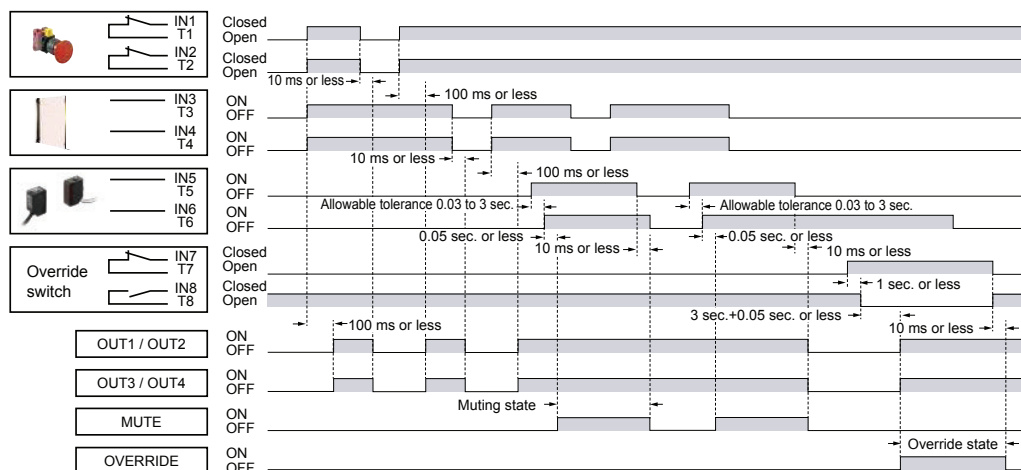
FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS/
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideSafety Light
CurtainsSafety
Control UnitsSafety
Components**SF-C21****SF-C10**

PRESET LOGICS SPECIFICATIONS


Logic No.3 Sequential muting control

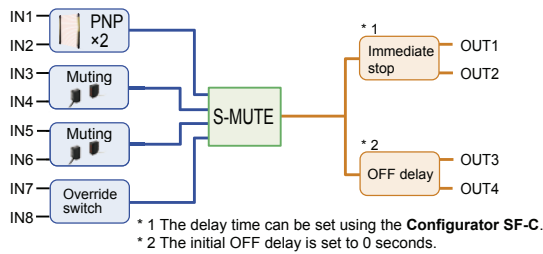


	I/O		Details
		Function	
Safety input	IN 1 / IN 2	PNP semiconductor input × 2 (equivalence)	
	IN 3 / IN 4	Muting input (equivalence)	
	IN 5 / IN 6	Muting input (equivalence)	
	IN 7 / IN 8	Override input	
Control output	OUT1 / OUT2	Interlock OFF delay	Overall reset (auto / manual) N/A
	OUT3 / OUT4	Interlock OFF delay	Overall reset (auto / manual) 0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (When auto-reset)

ON response: 100 ms or less
OFF response: 10 ms or less
Note: When manually reset, ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.

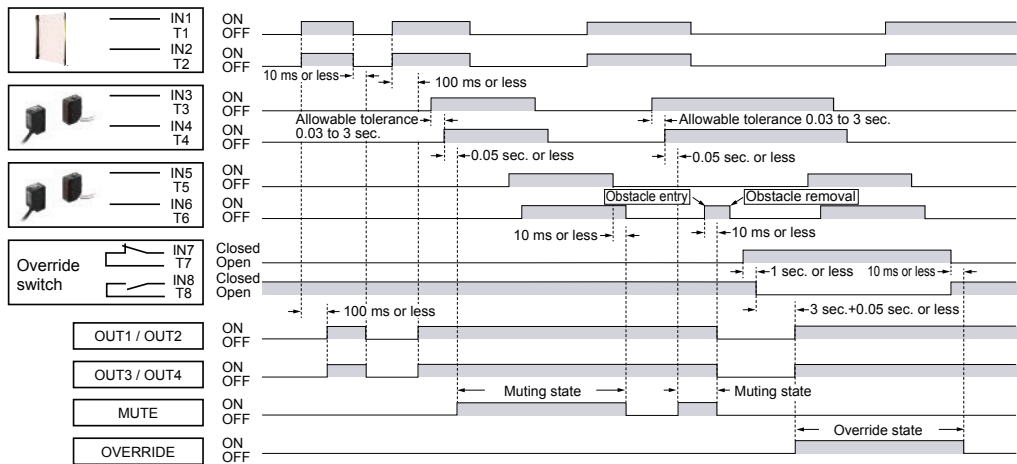


Logic No.4 Partial stop control 1

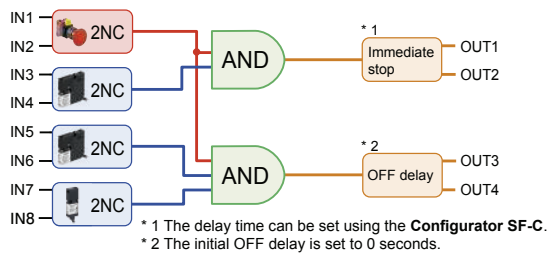


	I/O		Details
		Function	
Safety input	IN 1 / IN 2	2NC contact input	
	IN 3 / IN 4	2NC contact input	
	IN 5 / IN 6	2NC contact input	
	IN 7 / IN 8	2NC contact input	
Control output	OUT1 / OUT2	Interlock OFF delay	Partial reset (manual) N/A
	OUT3 / OUT4	Interlock OFF delay	Partial reset (manual) 0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (Manual reset)

ON response: ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.
OFF response: 10 ms or less


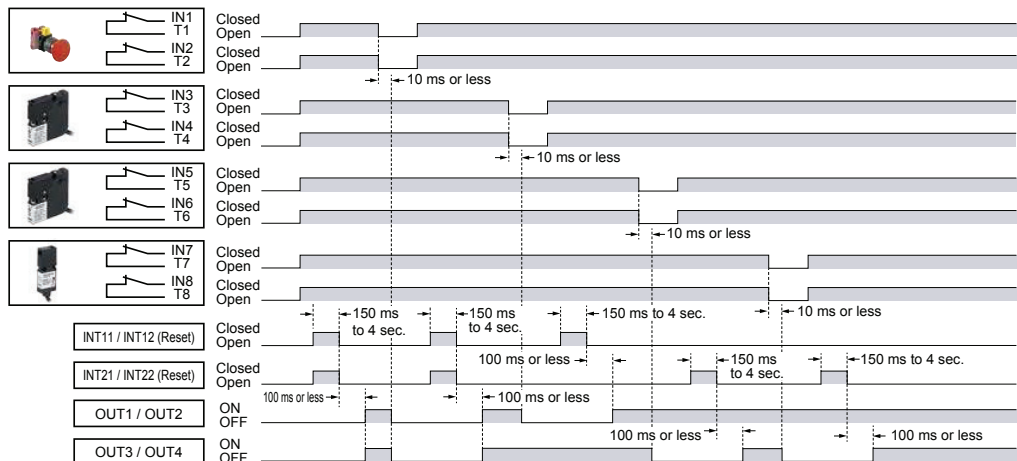


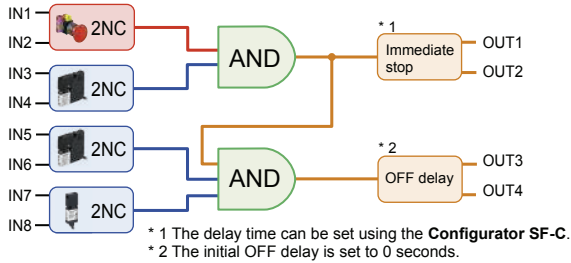PRESET LOGICS SPECIFICATIONS**Logic No.5 Partial stop control 2**

	I/O		Details
		Function	
Safety input	IN 1 / IN 2		2NC contact input
	IN 3 / IN 4		2NC contact input
	IN 5 / IN 6		2NC contact input
	IN 7 / IN 8		2NC contact input
Control output	OUT1 / OUT2	Interlock	Partial reset (manual)
		OFF delay	N/A
	OUT3 / OUT4	Interlock	Partial reset (manual)
		OFF delay	0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (Manual reset)


ON response: ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.
OFF response: 10 ms or less

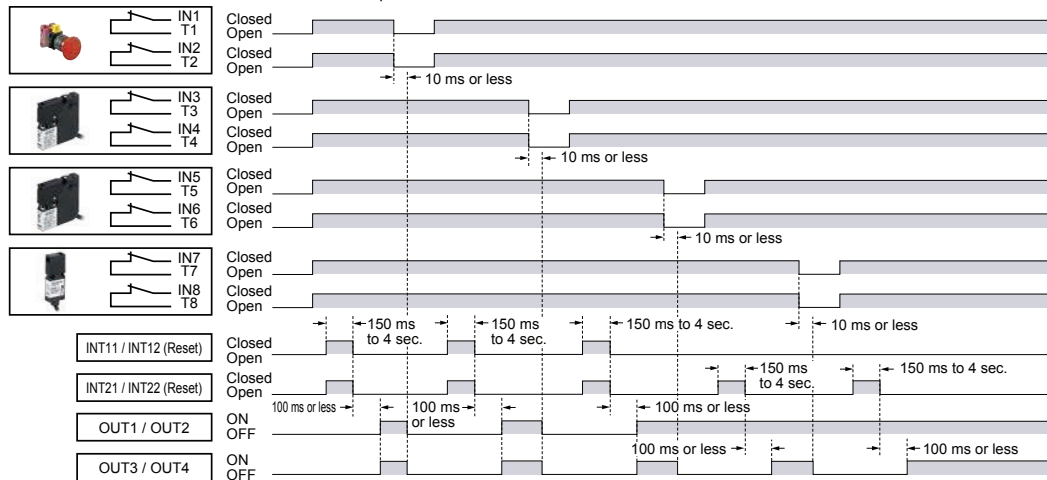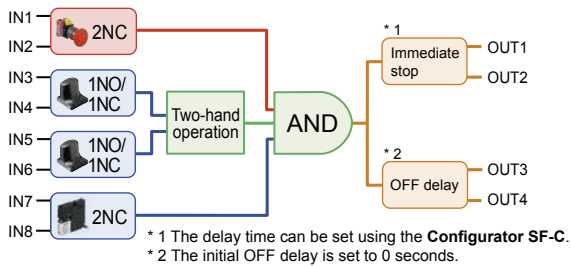
**Logic No.6 Two-hand control**

	I/O		Details
		Function	
Safety input	IN 1 / IN 2		2NC contact input
	IN 3 / IN 4		1NO / 1NC contact input
	IN 5 / IN 6		1NO / 1NC contact input
	IN 7 / IN 8		2NC contact input
Control output	OUT1 / OUT2	Interlock	Overall reset (auto / manual)
		OFF delay	N/A
	OUT3 / OUT4	Interlock	Overall reset (auto / manual)
		OFF delay	0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (When auto-reset)

ON response: 100 ms or less Note: ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.
OFF response: 10 ms or less

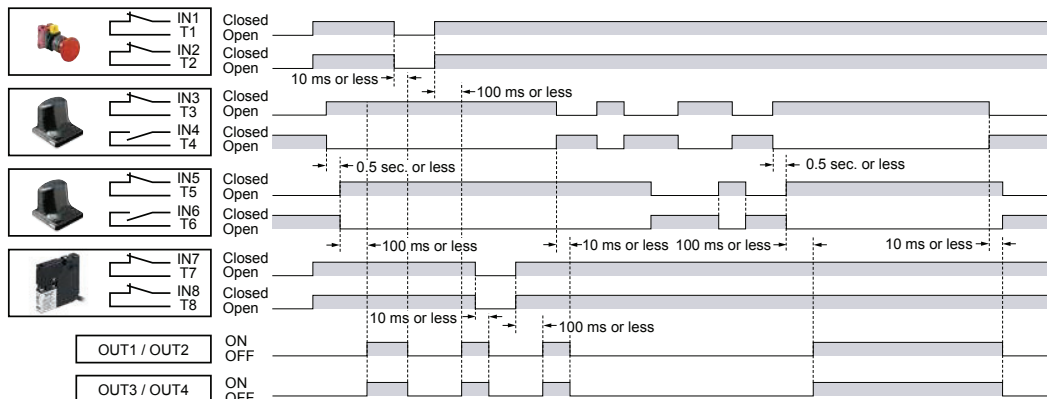


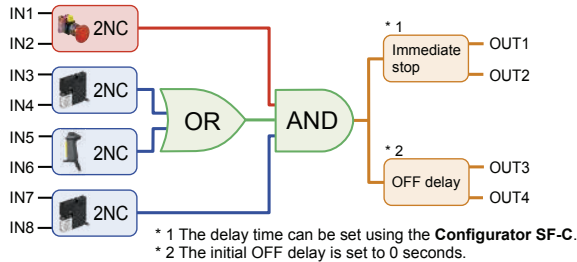
PRESET LOGICS SPECIFICATIONS**Logic No.7 OR control**

	I/O		Details
		Function	
Safety input	IN 1 / IN 2		2NC contact input
	IN 3 / IN 4		2NC contact input
	IN 5 / IN 6		2NC contact input
	IN 7 / IN 8		2NC contact input
Control output	OUT1 / OUT2	Interlock	Overall reset (auto / manual)
		OFF delay	N/A
	OUT3 / OUT4	Interlock	Overall reset (auto / manual)
		OFF delay	0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (When auto-reset)

ON response: 100 ms or less
 OFF response: 10 ms or less

Note: ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.

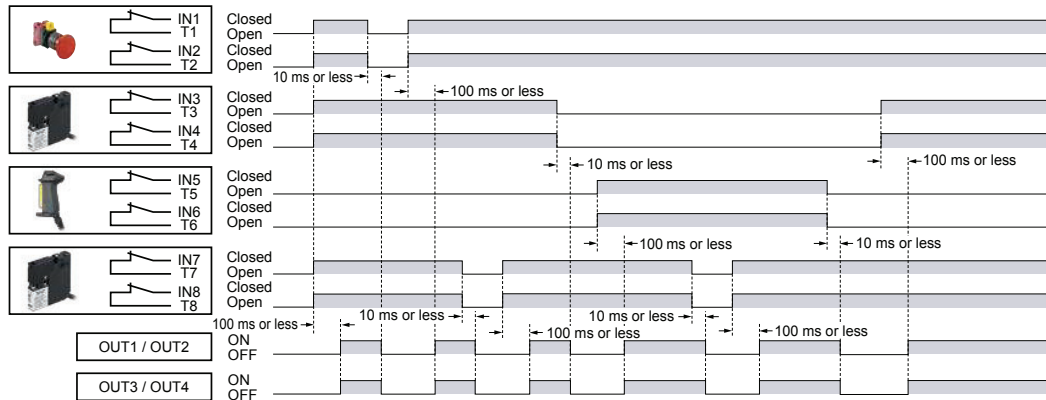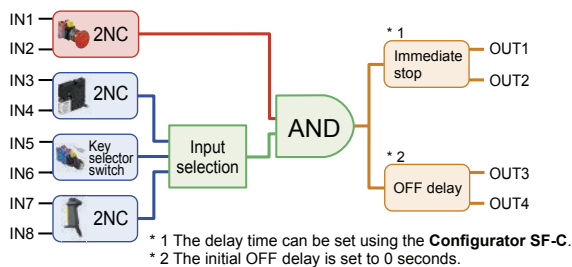
**Logic No.8 Operation mode selection control**

	I/O		Details
	Function		
Safety input	IN 1 / IN 2		2NC contact input
	IN 3 / IN 4		2NC contact input
	IN 5 / IN 6		Key selector input
	IN 7 / IN 8		2NC contact input
Control output	OUT1 / OUT2	Interlock	Overall reset (auto / manual)
		OFF delay	N/A
	OUT3 / OUT4	Interlock	Overall reset (auto / manual)
		OFF delay	0 sec. (factory defaults, Max. 60 sec.)
Auxiliary output	AUX1		Negative logic of OUT1 / OUT2
	AUX2		Negative logic of OUT3 / OUT4
	AUX3		Reset trigger
	AUX4		Lockout

Time chart (When auto-reset)

ON response: 100 ms or less
 OFF response: 10 ms or less

Note: ON in 100 ms or less after reset input (150 ms to 4 sec.) is entered.

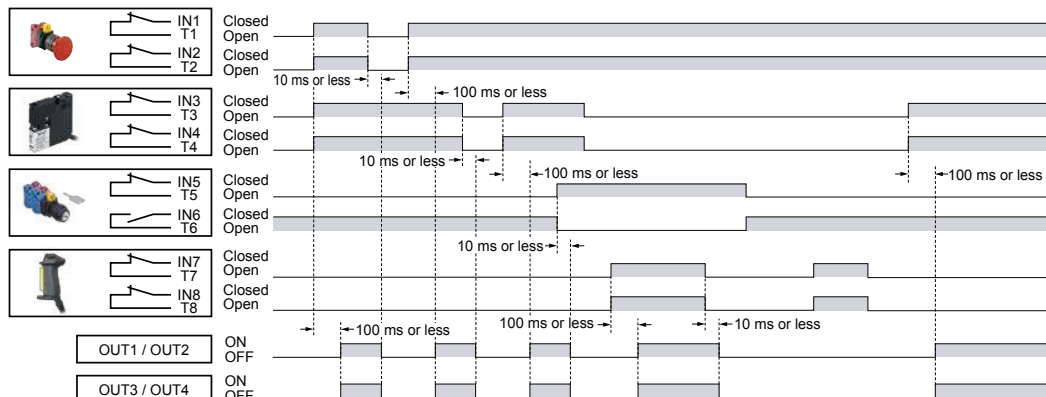FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN /
MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideSafety Light
CurtainsSafety
Control UnitsSafety
Components**SF-C21****SF-C10**

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY LIGHT
CURTAINS/
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
MANAGEMENT
SOLUTIONSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMS**PRECAUTIONS FOR PROPER USE**

Refer to the instruction manual for details.
The instruction manual can be downloaded from our website.



For the safety of the overall system and the conformity to the standards applicable in each region or country in which this device is installed, take actions on the customer's own responsibility.

- This device has been developed / produced for industrial use only.

Environment

- Do not use a mobile phone or a radio phone near this device.
- This device starts the performance after 2 seconds from the power ON. Have the control system started to function with this timing.
- Do not install this device in the following environments.
 - 1) The device is exposed to direct sunlight.
 - 2) Dew condensation may occur due to sudden changes in temperature.
 - 3) The ambient air contains corrosive or flammable gas.
 - 4) There is a high level of dust, metallic dust, or salt content.
 - 5) The device may be exposed to organic solvents such as benzene, thinner, or alcohol and/or strong alkaline substances such as ammonia or caustic soda, or any such substances exist in the ambient air.
 - 6) The device may be directly exposed to vibration or impact or to water drops.
 - 7) The device may be exposed to interference from nearby high-voltage lines, high-voltage equipment, power wires, motor equipment, an amateur radio station or other transmitter, or a device with large switching surges (the device must be placed at a distance of 100 mm 3.937 in or greater from any interference sources).

Wiring

Take countermeasure against the system to be applied for this device so as not to carry out the dangerous performance caused by the earth failure.
Failure to do so could cause invalid for the system stop, resulting in death or serious injury.


- Do not work on (connect or remove etc.) the device while the power is ON. Failure to follow this precaution could result in an electric shock.
- All electrical wiring should conform to the regional electrical regulations and laws. The wiring should be done by engineer(s) having the special electrical knowledge.
- Do not run the wires together with high-voltage lines or power lines or put them in the same raceway. This can cause malfunction due to induction.
- Do not control the device only at one control output.

Machine designer, installer, employer and operator

- The machine designer, installer, employer and operator are solely responsible to ensure that all applicable legal requirements relating to the installation and the use in any application are satisfied and all instructions for installation and maintenance contained in the instruction manual are followed.
- Whether this device functions as intended to and systems including this device comply with safety regulations depends on the appropriateness of the application, installation, maintenance and operation. The machine designer, installer, employer and operator are solely responsible for these items.

DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

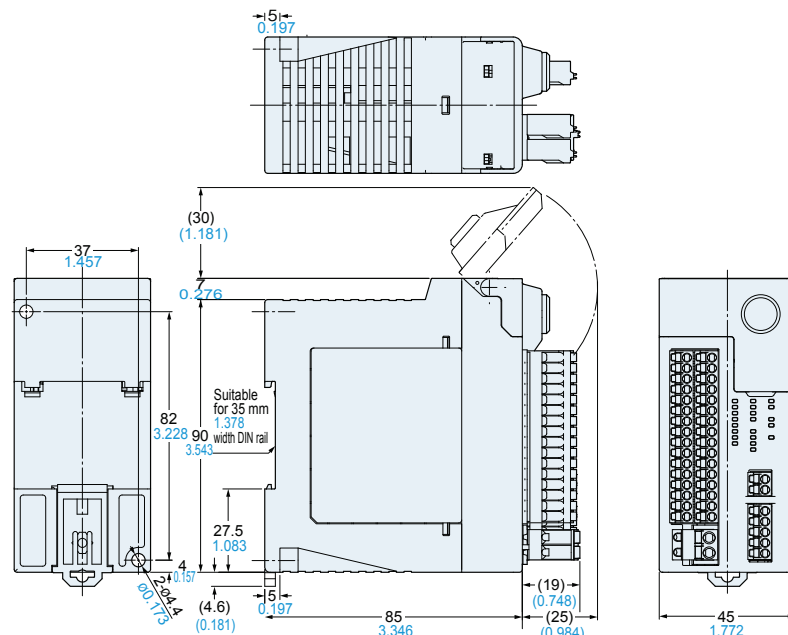

Selection
Guide
Safety Light
Curtains
Safety
Control Units
Safety
Components

SF-C21**SF-C10**

MEMO