


WLB92



Industrial LED Light Bar

- Improve worker productivity and ergonomics with bright, high-quality, uniform light
- Avoid damage and nuisance repairs with a rugged metal housing and shatterproof cover
- Save maintenance time and lower utilities expenses with long-life, energy-efficient LEDs

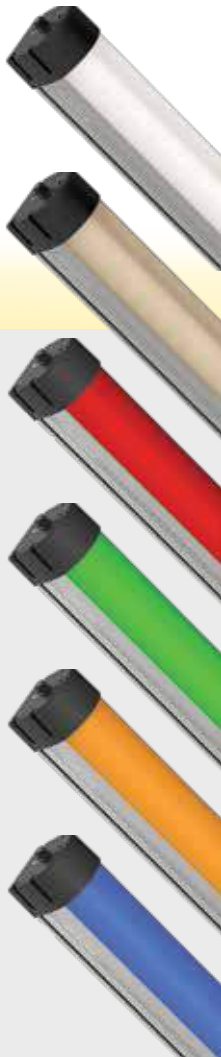

Advanced LED lighting for your factory, flexibility for you.

With the WLB92, there are a variety of mounting options, ac and dc models and dimming functions available to suit your lighting needs.

AC or DC models available with a variety of connection options

Choose from two lengths: 550 or 1100 mm

Dimming knob (optional) allows you to customize light levels

Rugged, anodized aluminum housing

Side and rear mounting slots entire lighted length

Impact-resistant, light-diffusing polycarbonate window for even light output

7150 lumen output @ 110 lumens/watt (1100 mm model)





Models available with industry-standard conduit knockouts for continuous run and permanent installations




DC models with integrated M12 connector



DC Models



AC Models

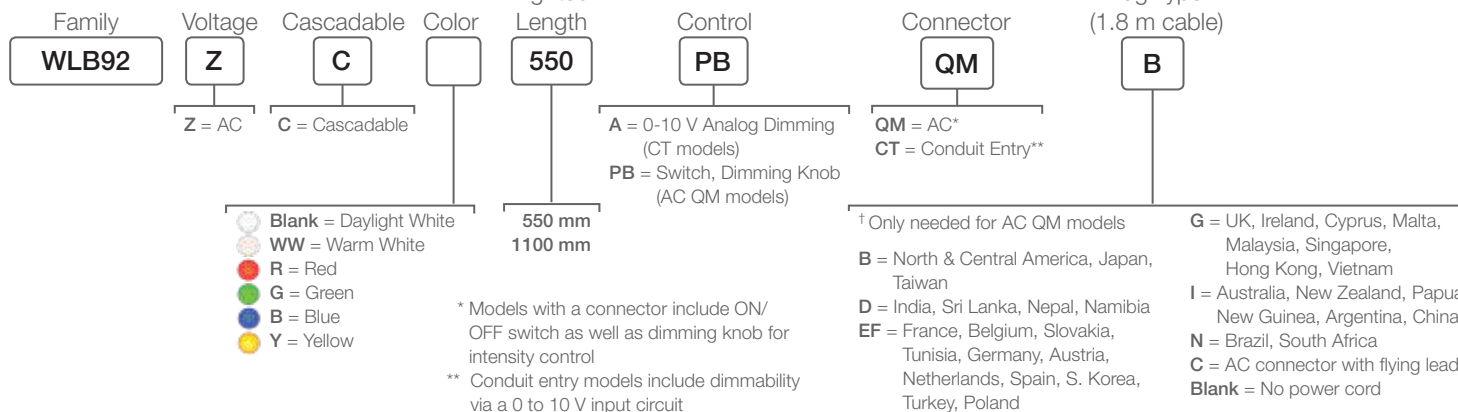

Operating Voltage	24 V dc (dc models) 100 to 277 V ac (ac models)
Construction	Housing: Anodized aluminum Window: Polycarbonate
LED Lifetime	L70 = 50,000 hours
Color Temperature	Daylight White — 5000 k Warm White — 3000 k
Environmental Rating	IEC IP40
Certifications	

Accessories



LMBWLB92



LMBWLB92CLIP



LMBWLB92HK5



LMBWLB92S



LMBWLB92RAS

AC Power Cordset 1.8 m (6')
for use with models using QM connector



LQMAC-306	Flying Leads
LQMAC-306B	North & Central America, Japan, Taiwan
LQMAC-306D	India, Sri Lanka, Nepal, Namibia
LQMAC-306EF	France, Belgium, Slovakia, Tunisia, Germany, Austria, Netherlands, Spain, S. Korea, Turkey, Poland
LQMAC-306G	UK, Ireland, Cyprus, Malta, Malaysia, Singapore, Hong Kong, Vietnam
LQMAC-306I	Australia, New Zealand, Papua New Guinea, Argentina, China
LQMAC-306N	Brazil, South Africa



Double-ended Cascading
Male straight/Male straight

LQMAEC-3005SS	0.15 m (0.5')
LQMAEC-301SS	0.31 m (1.0')
LQMAEC-303SS	0.91 m (3.0')

DC Cordsets



4-Pin M12/ Euro-Style
Straight connector models listed; for right-angle, add RA to the end of the model number (example, MQDC-406RA)

MQDC-406	2 m (6.5')
MQDC-415	5 m (15')
MQDC-430	9 m (30')

4-Pin M12/Euro-Style
Splitter

CSB-M1241M1241
0.3 m (1') male trunk;
2 x 0.3 m (1') female branches

