


# Panasonic

NEW

One-Touch Connection System Compatible with 4CH / 1CH Flange  
**Vacuum-resistant Fibers**

Breakthrough in vacuum-resistant fibers

# One-Touch Connection Just in 1 Second\*

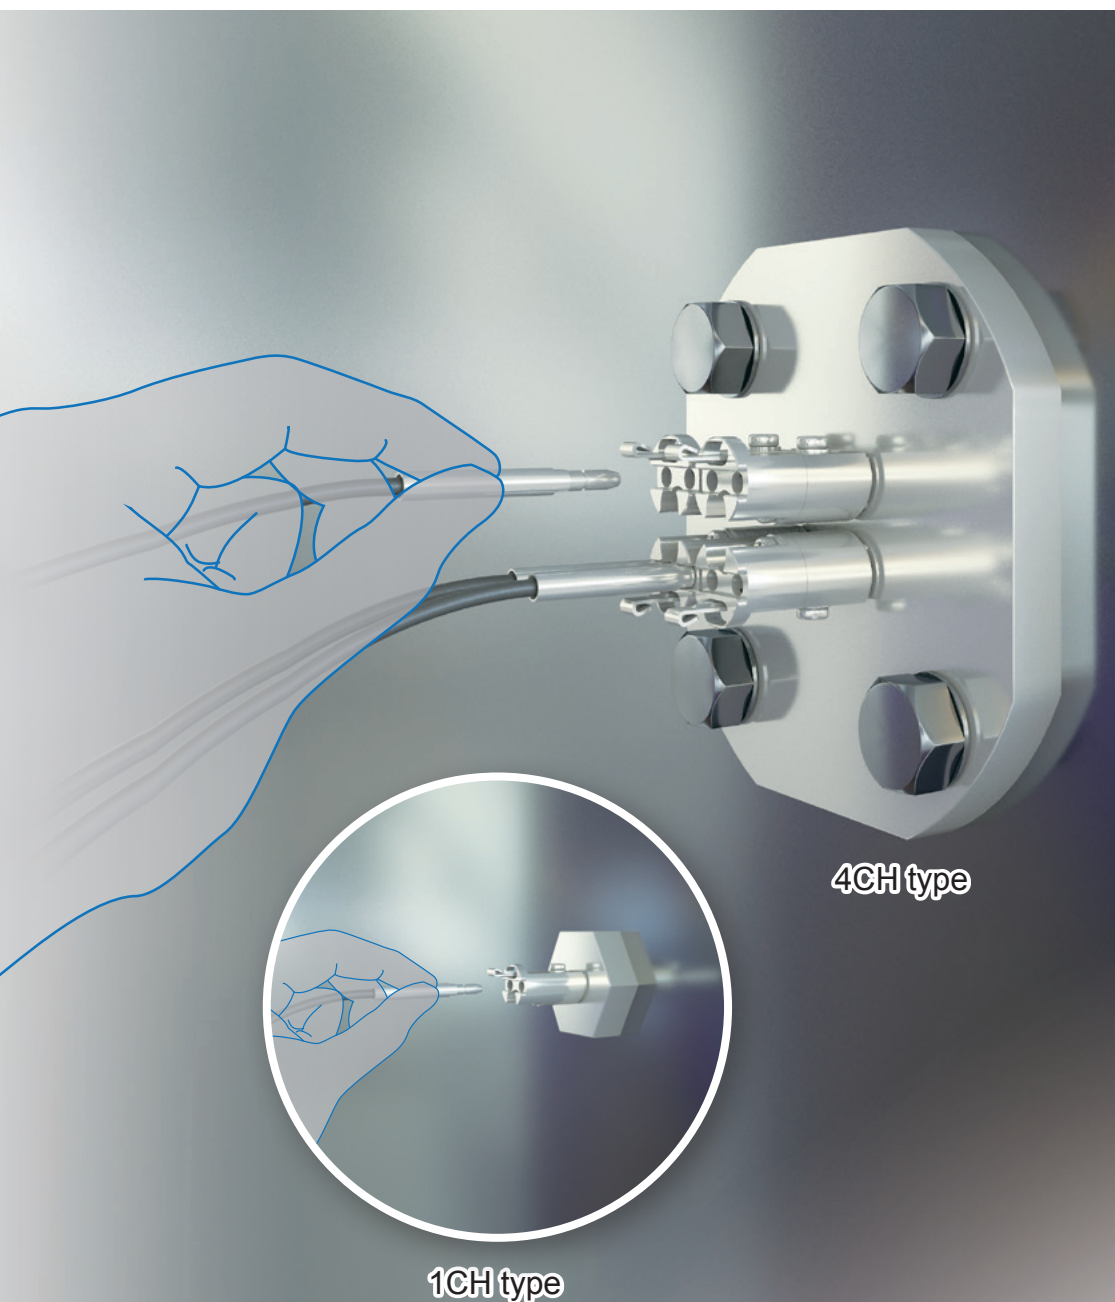


\* Time required to connect one fiber to the flange.

Easier and simpler

## Amazingly easy to connect!


Vacuum-resistant fiber flange designed to enable easy connection (one-touch connection) and disconnection of fibers one by one or at the same time.

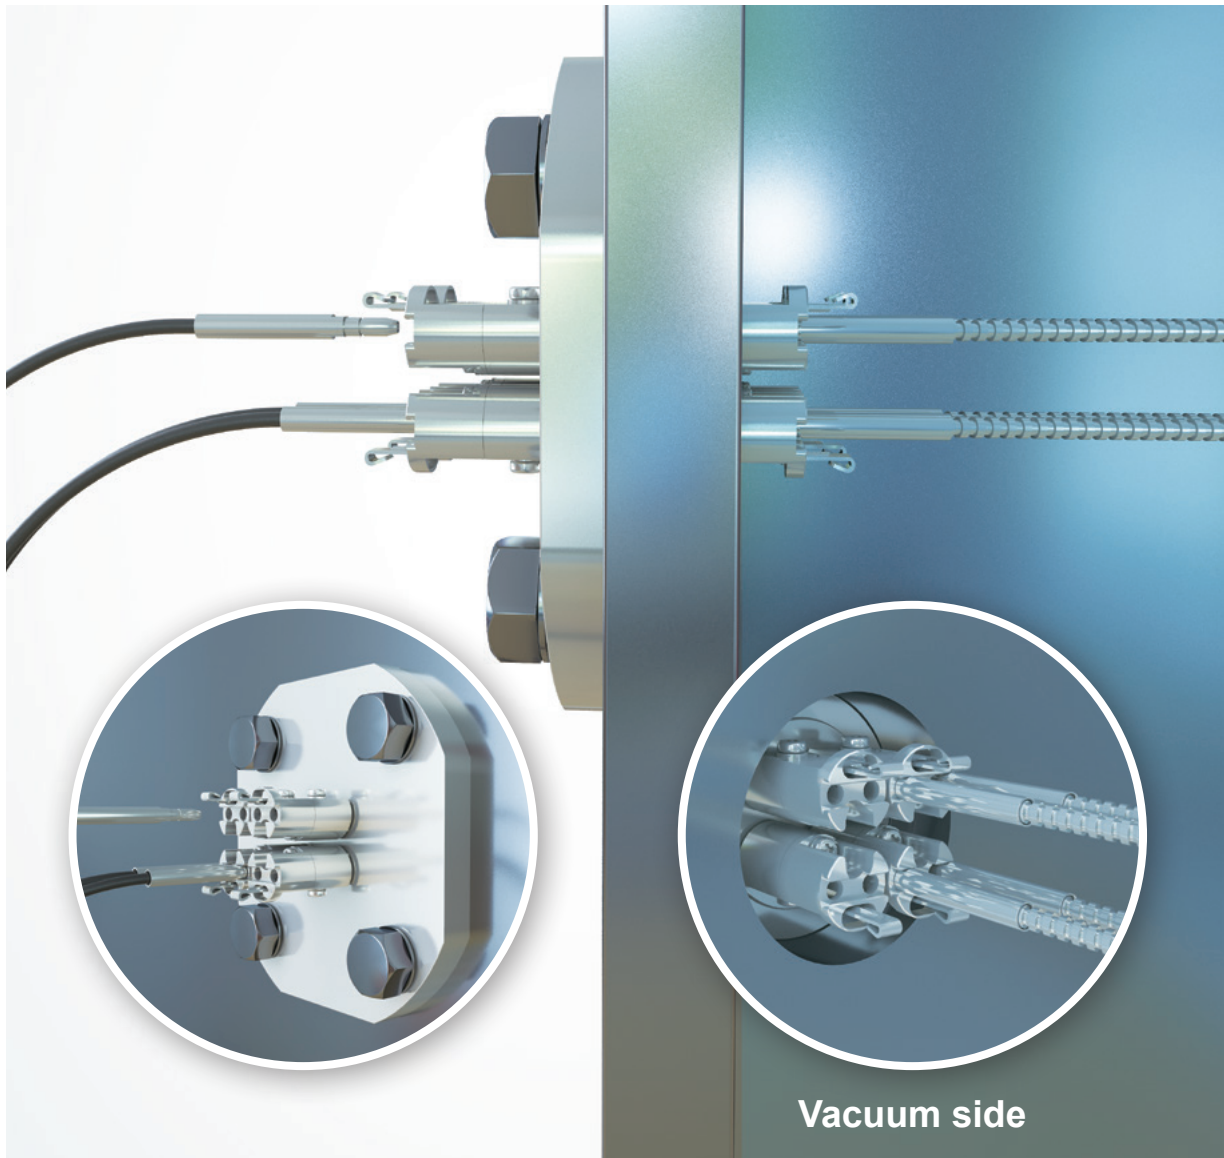

### Leakage seal construction

The leakage seal construction has built-in glass wires inside the flange and allows transmission of only light to the vacuum side. Leakage remains unchanged even when fiber is not connected.



\* Leakage from 4CH / 1CH flange:  $1.0 \times 10^{-10}$  Pa·m<sup>3</sup>/s [He] or less

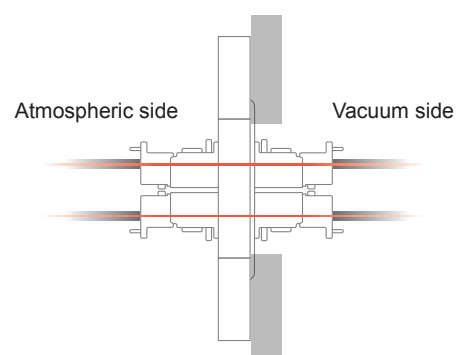

# One-touch connection just in 1 second

## Simply insert the fiber into the flange

The newly developed one-touch connection system allows easy connection of a fiber by simply positioning the fiber in the specified direction and inserting. The fiber can be disconnected by pulling the holding bracket up. The one-touch connection system helps reduce working hours dramatically.

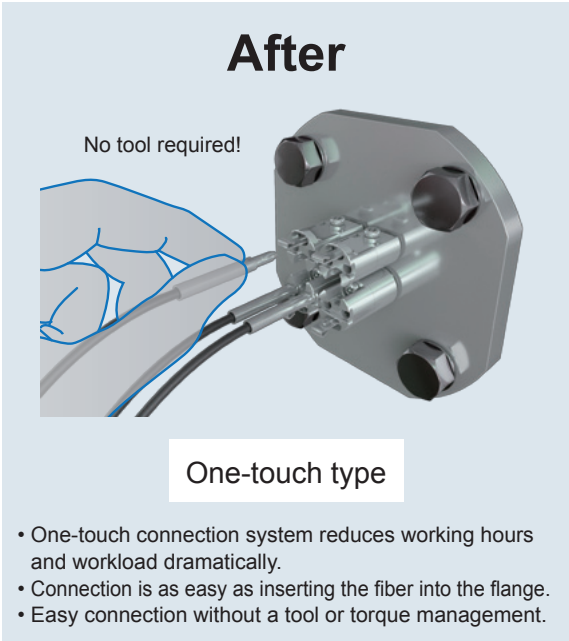
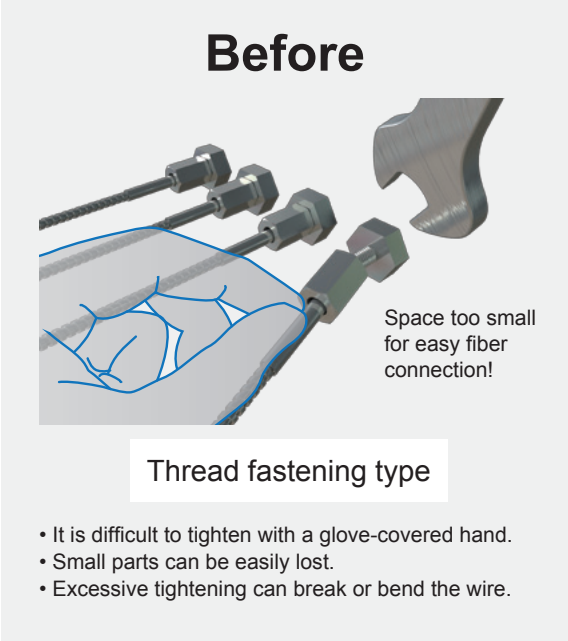


\* The disconnection prevention structure uses a holding bracket that engages securely with the joint bracket.

# Vacuum-resistant 4CH / 1CH flange

## Requires drilling of only one hole

The flange connection system requires less space for the fiber lead-in section and fewer holes to drill. Previously, one installation hole had to be drilled for each fiber. The vacuum-resistant flange requires only one hole even for multiple fibers, thus reducing the hole drilling cost and the possibility of leakage.

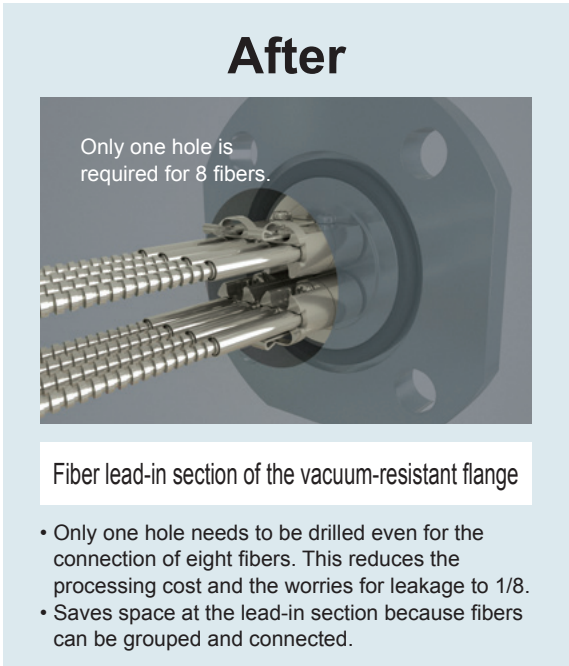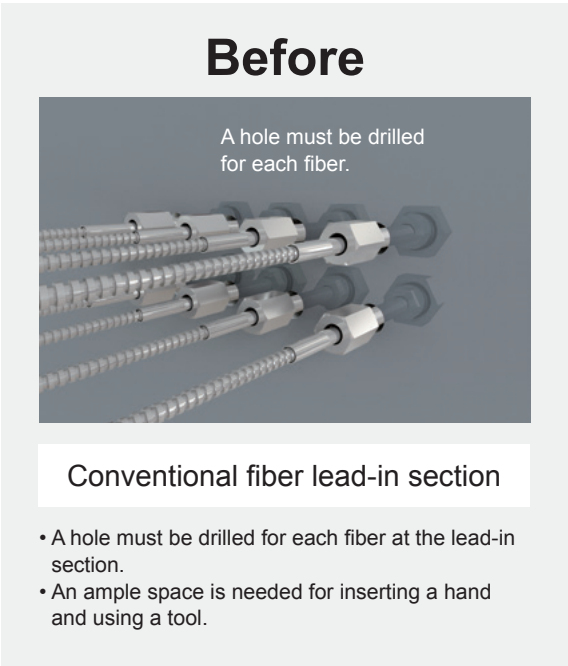

# Fiber Lineup

## Vacuum side fiber

\* Sensing ranges are for FX-500 series amplifiers.

### Vacuum-resistant thru-beam type fiber FT-40V

Sensing range: STD mode 270 mm **10.630 in**  
HYPER mode 1,000 mm **39.370 in**  
Ambient temperature: -30 to +300 °C **-22 to +572 °F**

### FT-40V + FV-LE1 (Expansion lens)

Sensing range: STD mode 1,500 mm **59.055 in**  
HYPER mode 1,800 mm **70.866 in**  
Ambient temperature: -30 to +300 °C **-22 to +572 °F**

### FT-40V + FV-SV1

(Vacuum-resistant compact side-view lens)

Sensing range:  
STD mode 450 mm **17.717 in**  
HYPER mode 1,800 mm **70.866 in**  
Ambient temperature:  
-30 to +300 °C **-22 to +572 °F**

### FT-40V + FV-SV2

(Vacuum-resistant side-view lens)


Sensing range:  
STD mode 1,500 mm **59.055 in**  
HYPER mode 1,800 mm **70.866 in**  
Ambient temperature:  
-30 to +300 °C **-22 to +572 °F**

### Vacuum-resistant convergent reflective type fiber FD-L10V

Sensing range:  
STD mode 0 to 8 mm **0 to 0.315 in**  
HYPER mode 0 to 18 mm **0 to 0.709 in**  
Ambient temperature:  
-30 to +300 °C **-22 to +572 °F**


### Vacuum-resistant long range reflective type fiber FD-KZ50V

Sensing range:  
STD mode 20 to 200 mm **0.787 to 7.874 in**  
HYPER mode 5 to 500 mm **0.197 to 19.685 in**  
Ambient temperature:  
-30 to +300 °C **-22 to +572 °F**

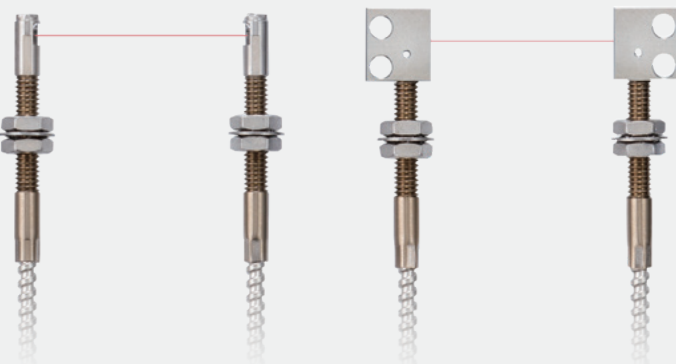


## Atmospheric side fiber

### FT-J9



**Bending durability**  
**10 million times or more**  
(Typical)

Bending conditions  
Bending radius: R10 mm **R0.394 in**,  
Reciprocating bending: 180°



**More flexible**  
**R4 mm R0.157 in**

## Vacuum-resistant flange




**Vacuum-resistant flange 4CH**  
**FV-FR4**




**Vacuum-resistant flange 1CH**  
**FV-FR1**


# Applications

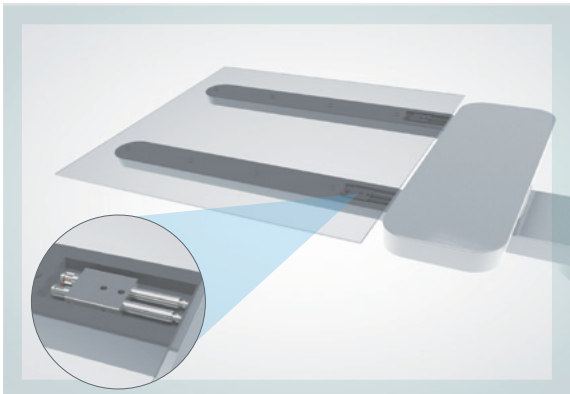


Detection of glass seating on robot hand

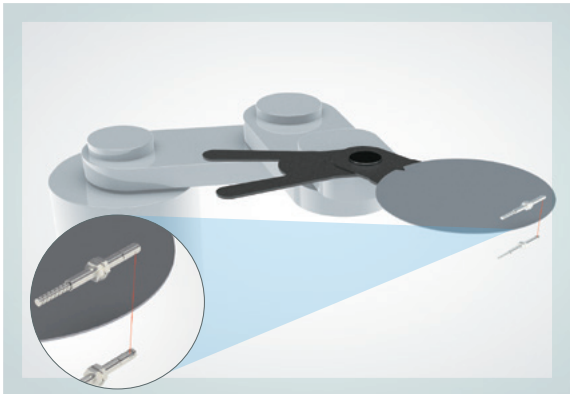

Detection of semiconductor wafer

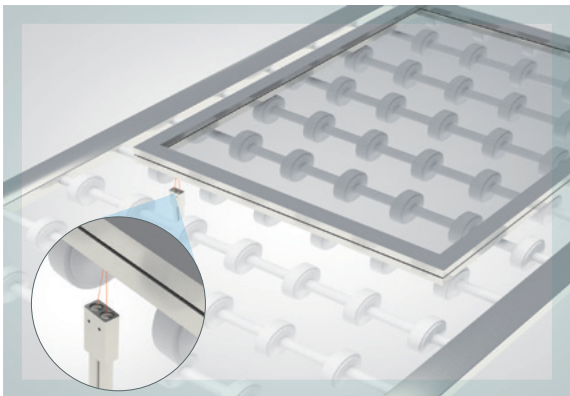

Detection of passing glass

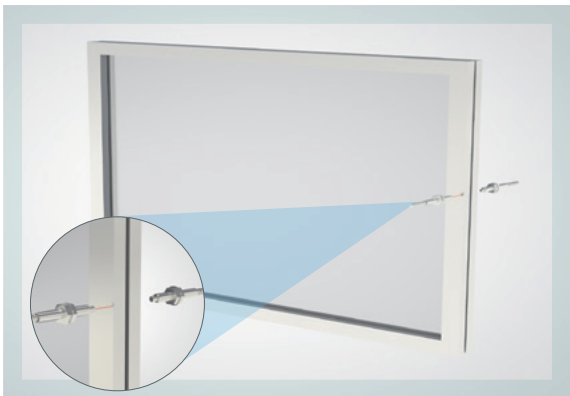

Detection of presence / absence of glass


## Contributes to your product quality improvement and workload reduction

Using the integrated manufacturing system established in our factory, we conduct all processes ranging from product development to production, quality control, packaging and shipping.



Vacuum baking for the reduction of outgas


The vacuum side fiber and flange are cleaned and baked, and then seal-packed and double-packed for shipping.

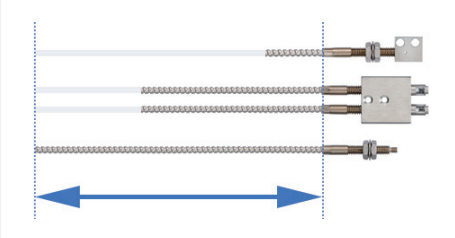

Customizable fiber length


We offer semi-custom products in which the fiber length can be specified in 100 mm [3.937 in](#) increments. Different fiber lengths can be specified for the emitting side and receiving side. Contact our sales office for semi-custom products.

## VACUUM-RESISTANT FIBER SET CONTENTS

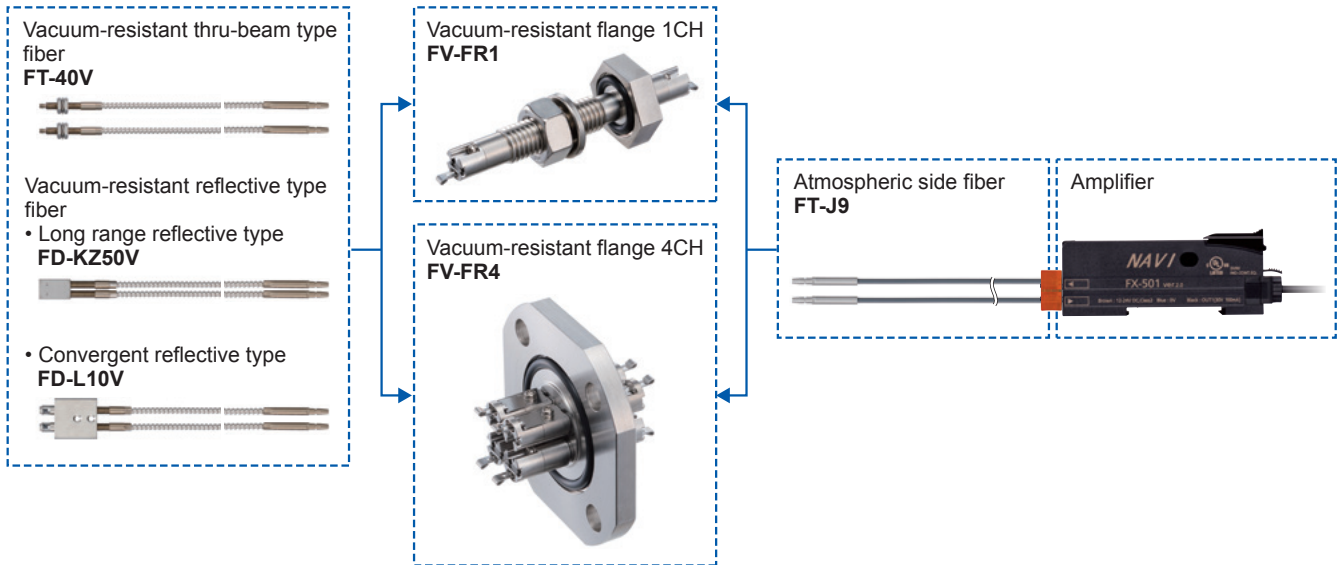



## LIST OF FIBERS

**Vacuum-resistant thru-beam type (one pair set)** Atmospheric side fiber is optional and sold separately.

Type		Shape of fiber head (mm in)	Model No.	Bending radius (mm in)	Fiber cable length	Sensing range (mm in) (Note 2)						Beam axis dia. (mm in)	Ambient temp.
						FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series	Other modes	U-LG LONG FAST		
Vacuum-resistant	Thru-beam	300 °C 572 °F, Lens mountable (FV-LE1/SV1/SV2) 	FT-40V	R25 R0.984	1 m 3.281 ft (Note 1)	STD 270 10.630 HYPR 1,000 39.370	590 23.228 470 18.504 160 6.299 55 2.165	STD 400 15.748 HYPR 1,400 55.118	950 37.402 620 24.409 250 9.843	110 4.331 280 11.024	ø1.3 ø0.051	-30 to +300 °C -22 to +572 °F	


Notes: 1) This is not a "free-cut" type. We offer only semi-custom products in which the fiber length can be specified in 100 mm 3.937 in increments. For details, please contact our sales office.  
2) FX-550L series does not have FAST mode.

**Vacuum-resistant reflective type** Atmospheric side fiber is optional and sold separately.

Type		Shape of fiber head (mm in)	Model No.	Bending radius (mm in)	Fiber cable length	Sensing range (mm in) (Note 2, 3)						Ambient temp.
						FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series	Other modes	U-LG LONG FAST	
Vacuum-resistant	Long range reflective	300 °C 572 °F, Rectangular head  W9.5 × H5.2 × D15 W0.374 × H0.205 × D0.591	FD-KZ50V	R25 R0.984	1 m 3.281 ft (Note 1)	STD 20 to 200 0.787 to 7.874 HYPR 5 to 500 0.197 to 19.685	10 to 340 0.394 to 13.386 15 to 270 0.591 to 10.630 20 to 120 0.787 to 4.724 20 to 45 0.787 to 1.772	STD 20 to 450 0.787 to 17.717 HYPR 5 to 1,500 0.197 to 59.055	10 to 1,000 0.394 to 39.370 15 to 650 0.591 to 25.591 20 to 300 0.787 to 11.811	25 to 80 0.984 to 3.150 10 to 220 0.394 to 8.661	-30 to +300 °C -22 to +572 °F	
	Convergent reflective	300 °C 572 °F, Glass substrate detection  W19 × H5 × D27 W0.748 × H0.197 × D1.063	FD-L10V		3 m 9.843 ft (Note 1)	STD 0 to 8 0 to 0.315 HYPR 0 to 18 0 to 0.709	0 to 12 0 to 0.472 0 to 10 0 to 0.394 0 to 5.5 0 to 0.217 1.5 to 3 0.059 to 0.118	STD 0 to 11 0 to 0.433 HYPR 0 to 27 0 to 1.063	0 to 19 0 to 0.748 0 to 13 0 to 0.512 0 to 7.5 0 to 0.295	2.5 to 6.5 0.098 to 0.256 0 to 11 0 to 0.433		

Notes: 1) This is not a "free-cut" type. We offer only semi-custom products in which the fiber length can be specified in 100 mm 3.937 in increments. For details, please contact our sales office.  
2) The sensing range is the value for transparent glass 100 × 100 × t0.7 mm 3.937 × 3.937 × t0.028 in.  
3) FX-550L series does not have FAST mode.

**Atmospheric side (one pair set)**

Type	Shape of fiber head (mm in)	Model No.	Bending radius (mm in)	Fiber cable length ✂: Free-cut	Ambient temp.
Atmospheric side	 ø3.7 × 30 ø0.146 × 1.181	<b>Tough</b> (Bending durability) FT-J9	R4 R0.157	✂ 2 m 6.562 ft (Note 1, 2)	-30 to +80 °C -22 to +176 °F



Notes: 1) We offer only semi-custom products in which the fiber length can be specified in 1 m 39.37 in increments. For details, please contact our sales office.  
2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

**Tough**: Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

**Bending durability**: Refers to a fiber which possesses unbreakable bending resistant feature (bending radius: R10 mm R0.394 in, reciprocating bending: 180°).

## FIBER OPTIONS

**Vacuum-resistant flange** Applicable fibers are **FT-40V**, **FD-KZ50V**, **FD-L10V** and **FT-J9**.




Designation	Model No.	Description	
Vacuum-resistant flange 1CH	<b>FV-FR1</b>		Atmospheric side and vacuum side are isolated.
			Main specifications
			Model No. <b>FV-FR1</b> <b>FV-FR4</b>
			Applicable fibers <b>FT-40V, FD-KZ50V, FD-L10V, FT-J9</b>
Vacuum-resistant flange 4CH	<b>FV-FR4</b>		Leakage $1.0 \times 10^{-10}$ Pa·m <sup>3</sup> /s [He] or less (* Measured with a He detector)
			Ambient temperature -30 to +120 °C <b>-22 to +248 °F</b> (Same for storage. Up to +40 °C <b>+104 °F</b> when humidity is high. However, no dew condensation or icing allowed.)
			Ambient humidity 35 to 85% RH (Same for storage)
			Tightening torque Nut: 14.7 N·m or less (M14 nut) 9.8 N·m or less (M8 screw)
			Tensile strength 20 N or less (Atmospheric / vacuum side fiber joint)
			O-ring size V15 V40
			Weight 100 g approx. 410 g approx.
			Material Main unit: Stainless steel (SUS303), Holding bracket: Stainless steel (SUS301), Fiber: Quartz glass, O-ring: Fluororubber

Recommended thickness of vacuum chamber wall  
 • For **FV-FR1**: 3.0 to 40.0 mm **0.118 to 1.575 in** (Note 1)  
 • For **FV-FR4**: 3.0 mm **0.118 in** or more (Note 2)

Notes: 1) Confirm the wall thickness in advance since the **FV-FR1** cannot be installed to a vacuum chamber with a wall thickness outside the recommended thickness range.

2) If the vacuum chamber wall is too thick, the **FV-FR4** may not be able to connect to the vacuum side fiber. In that case, connect the **FV-FR4** to the vacuum side fiber before the installation.

### Vacuum-resistant lens (For thru-beam type fiber)

Designation		Model No.	Description																																																																																		
For thru-beam type fiber	Vacuum-resistant expansion lens (Note 1)	FV-LE1		<div>Increases the sensing range 4 times or more.</div> <div>• Ambient temperature: -60 to +350 °C <b>-76 to +662 °F</b> (Note 2)</div> <div>• Beam axis dia: ø3.6 mm <b>ø0.142 in</b></div> <div>Sensing range (mm <b>in</b>) [Lens on both sides] (Note 3)</div> <table><tr><th colspan="2" rowspan="2">Fiber \ Amplifier Mode</th><th colspan="6">FX-500 series (Upper value)</th><th colspan="2">FX-100 series</th></tr><tr><th colspan="6">FX-550 / FX-550L series (Lower value)</th><th>FX-101</th><th>FX-102</th></tr><tr><td rowspan="3">FT-40V</td><td>HYPR</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,500</td><td>900</td><td>370</td><td rowspan="3">450</td><td rowspan="3">1,600</td></tr><tr><td>U-LG</td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>59.055</b></td><td><b>35.433</b></td><td><b>14.567</b></td></tr><tr><td>LONG</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,650</td><td>—</td></tr><tr><td>STD</td><td></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>64.961</b></td><td></td><td></td><td></td></tr><tr><td>FAST</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>H-SP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Fiber \ Amplifier Mode		FX-500 series (Upper value)						FX-100 series		FX-550 / FX-550L series (Lower value)						FX-101	FX-102	FT-40V	HYPR	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,500	900	370	450	1,600	U-LG	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>59.055</b>	<b>35.433</b>	<b>14.567</b>	LONG	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,650	—	STD		<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>64.961</b>				FAST										H-SP									
	Fiber \ Amplifier Mode		FX-500 series (Upper value)						FX-100 series																																																																												
			FX-550 / FX-550L series (Lower value)						FX-101	FX-102																																																																											
FT-40V	HYPR	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,500	900	370	450	1,600																																																																												
	U-LG	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>59.055</b>	<b>35.433</b>	<b>14.567</b>																																																																														
	LONG	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,650	—																																																																														
STD		<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>64.961</b>																																																																															
FAST																																																																																					
H-SP																																																																																					
Vacuum-resistant compact side-view lens (Note 1)	FV-SV1		<div>Beam axis is bent by 90°.</div> <div>• Ambient temperature: -30 to +300 °C <b>-22 to +572 °F</b> (Note 2)</div> <div>• Beam axis dia: ø3 mm <b>ø0.118 in</b></div> <div>Sensing range (mm <b>in</b>) [Lens on both sides] (Note 3)</div> <table><tr><th colspan="2" rowspan="2">Fiber \ Amplifier Mode</th><th colspan="6">FX-500 series (Upper value)</th><th colspan="2">FX-100 series</th></tr><tr><th colspan="6">FX-550 / FX-550L series (Lower value)</th><th>FX-101</th><th>FX-102</th></tr><tr><td rowspan="3">FT-40V</td><td>HYPR</td><td>1,800 (Note 4)</td><td>900</td><td>700</td><td>450</td><td>290</td><td>90</td><td rowspan="3">150</td><td rowspan="3">460</td></tr><tr><td>U-LG</td><td><b>70.866</b></td><td><b>35.433</b></td><td><b>27.559</b></td><td><b>17.717</b></td><td><b>11.417</b></td><td><b>3.543</b></td></tr><tr><td>LONG</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,050</td><td>720</td><td>430</td><td>—</td></tr><tr><td>STD</td><td></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>41.339</b></td><td><b>28.346</b></td><td><b>16.929</b></td><td></td><td></td><td></td></tr><tr><td>FAST</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>H-SP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Fiber \ Amplifier Mode		FX-500 series (Upper value)						FX-100 series		FX-550 / FX-550L series (Lower value)						FX-101	FX-102	FT-40V	HYPR	1,800 (Note 4)	900	700	450	290	90	150	460	U-LG	<b>70.866</b>	<b>35.433</b>	<b>27.559</b>	<b>17.717</b>	<b>11.417</b>	<b>3.543</b>	LONG	1,800 (Note 4)	1,800 (Note 4)	1,050	720	430	—	STD		<b>70.866</b>	<b>70.866</b>	<b>41.339</b>	<b>28.346</b>	<b>16.929</b>				FAST										H-SP										
Fiber \ Amplifier Mode		FX-500 series (Upper value)						FX-100 series																																																																													
		FX-550 / FX-550L series (Lower value)						FX-101	FX-102																																																																												
FT-40V	HYPR	1,800 (Note 4)	900	700	450	290	90	150	460																																																																												
	U-LG	<b>70.866</b>	<b>35.433</b>	<b>27.559</b>	<b>17.717</b>	<b>11.417</b>	<b>3.543</b>																																																																														
	LONG	1,800 (Note 4)	1,800 (Note 4)	1,050	720	430	—																																																																														
STD		<b>70.866</b>	<b>70.866</b>	<b>41.339</b>	<b>28.346</b>	<b>16.929</b>																																																																															
FAST																																																																																					
H-SP																																																																																					
Vacuum-resistant side-view lens (Note 1)	FV-SV2		<div>Beam axis is bent by 90°.</div> <div>• Ambient temperature: -60 to +300 °C <b>-76 to +572 °F</b> (Note 2)</div> <div>• Beam axis dia: ø3.7 mm <b>ø0.146 in</b></div> <div>Sensing range (mm <b>in</b>) [Lens on both sides] (Note 3)</div> <table><tr><th colspan="2" rowspan="2">Fiber \ Amplifier Mode</th><th colspan="6">FX-500 series (Upper value)</th><th colspan="2">FX-100 series</th></tr><tr><th colspan="6">FX-550 / FX-550L series (Lower value)</th><th>FX-101</th><th>FX-102</th></tr><tr><td rowspan="3">FT-40V</td><td>HYPR</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,500</td><td>900</td><td>370</td><td rowspan="3">450</td><td rowspan="3">1,600</td></tr><tr><td>U-LG</td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>59.055</b></td><td><b>35.433</b></td><td><b>14.567</b></td></tr><tr><td>LONG</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,800 (Note 4)</td><td>1,100</td><td>—</td></tr><tr><td>STD</td><td></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>70.866</b></td><td><b>43.307</b></td><td></td><td></td><td></td></tr><tr><td>FAST</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>H-SP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Fiber \ Amplifier Mode		FX-500 series (Upper value)						FX-100 series		FX-550 / FX-550L series (Lower value)						FX-101	FX-102	FT-40V	HYPR	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,500	900	370	450	1,600	U-LG	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>59.055</b>	<b>35.433</b>	<b>14.567</b>	LONG	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,100	—	STD		<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>43.307</b>				FAST										H-SP										
Fiber \ Amplifier Mode		FX-500 series (Upper value)						FX-100 series																																																																													
		FX-550 / FX-550L series (Lower value)						FX-101	FX-102																																																																												
FT-40V	HYPR	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,500	900	370	450	1,600																																																																												
	U-LG	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>59.055</b>	<b>35.433</b>	<b>14.567</b>																																																																														
	LONG	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,800 (Note 4)	1,100	—																																																																														
STD		<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>70.866</b>	<b>43.307</b>																																																																															
FAST																																																																																					
H-SP																																																																																					

Notes: 1) Be careful when installing the thru-beam type fiber equipped with the lens, as the beam envelope becomes narrow and alignment is difficult.


2) Refer to previous page for the ambient temperature of fibers to be used in combination.

3) The fiber cable length for the **FT-40V** is 1 m **3.281 ft**. The sensing ranges take into account the length of the **FT-J9** atmospheric side fiber.

4) The fiber cable length practically limits the sensing range.

### Accessory


- Mounting bracket for **FD-KZ50V**  
**MS-FD-2**






Refer to the catalog of the applicable product series or visit our website for dimensions of the amplifier.  
The CAD data can be downloaded from our website.

Vacuum-resistant flange 1CH (Optional)

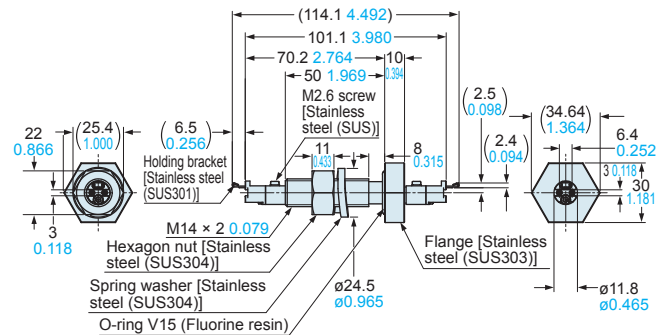

Vacuum-resistant flange 4CH (Optional)

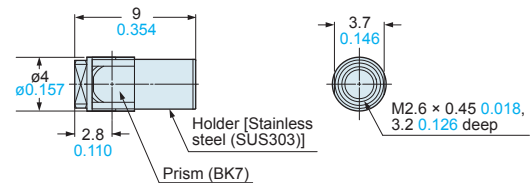

6  
0.236

Vacuum-resistant side-view lens (Optional)



## Digital Fiber Sensor

### FX-500 SERIES Ver.2




## Built-in logic functions

No PLC necessary, saving material and programming costs

### Logical calculation functions

3 logical calculations (AND, OR, XOR) are available with fiber sensor only. 3 logical operations can be selected against Output 1. Additional controller is not required so both wire-saving and cost reduction can be achieved.



#### Calculation of two neighboring amplifiers

② Lower side Output 1: Normal output operation  
③ Lower side output 1: Calculation result output  
④ Upper side output 1: Normal operation  
Communication direction (Up to 12 units)

#### Calculation of two outputs in one amplifier

FX-502(P) / FX-505(P)-C2  
③ Output 1: Normal output operation  
④ Output 2: Normal output operation  
⑤ Output 1: Calculation result output  
⑥ Output 2: Normal output operation

#### Calculation of one amplifier and external input

FX-502(P) / FX-505(P)-C2  
③ Output 1: Normal output operation  
④ External input (sensor, contact, PLC, etc.)  
⑤ Output 1: Calculation result output


#### Truth table

A	B	Logical calculation output (C)
ON	ON	AND
ON	OFF	OR
OFF	ON	OR
OFF	OFF	OR
ON	ON	XOR
ON	OFF	XOR
OFF	ON	XOR
OFF	OFF	XOR

## Reduces individual fiber sensor differences and improves stability noticeably!

When the FX-500 series is used together with our super quality fiber, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models.

By being close to absolute values instead of modified digital values, changes in detection that could not be found in the past can now be monitored.

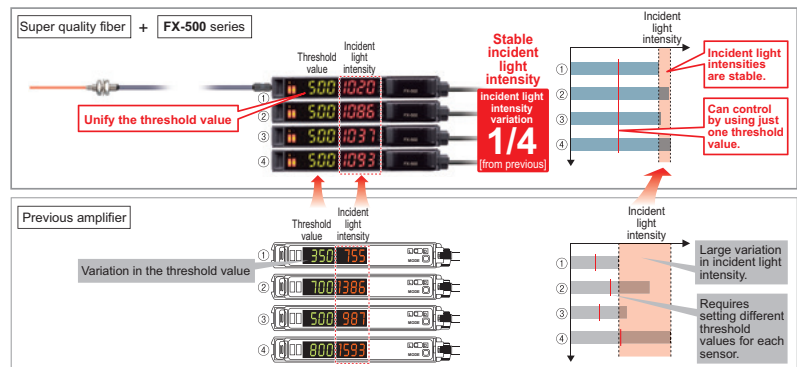

## Communication Unit for Open Network

### SC-GU3 SERIES




## Direct connection of digital sensors to open network!

- High reliability: Remote monitoring capability
- High operating rate: Improved maintainability
- Reduced installation time: Wire-saving and space-saving

### The SC-GU3 connects to the host system and enables the following:

- Saves traceability data
- Enables the change of threshold data all at once
- Acquires current values for use in predictive maintenance
- Remote control of equipment

Contributes to the acquisition of digital data of equipment status and application of IoT technology.

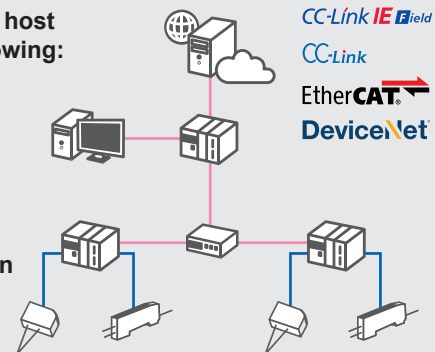

## Disclaimer

The applications described in the catalog are all intended for examples only. The purchase of our products described in the catalog shall not be regarded as granting of a license to use our products in the described applications. We do NOT warrant that we have obtained some intellectual properties, such as patent rights, with respect to such applications, or that the described applications may not infringe any intellectual property rights, such as patent rights, of a third party.

Please contact .....

## Panasonic Corporation

Industrial Device Business Division

1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
industrial.panasonic.com/ac/e/

# Panasonic®

©Panasonic Corporation 2019