

FX-500 SERIES Ver.2

Related Information	■ General terms and conditions..... F-7	■ Sensor selection guide..... P.3~
	■ Fiber selection..... P.5~	■ Glossary of terms..... P.1455~
	■ General precautions P.1458~	

Ver.2



* There is no change in Model No. and price due to version upgrade.
 * Cover opened state is shown.

panasonic.net/id/pidsx/global


At the industry's leading edge

Improved the operability and visibility of the operation keys

Operation keys (setting switch and MODE key) have been renewed to be easy to operate. Also, the color of the keys has been changed from black to light gray to achieve good visibility in dim light.

Previous

Setting switch MODE key



Upgraded (Ver. 2)


Setting switch MODE key



Clicking touch!

High stability!


When the **FX-500** series is used together with our super quality fiber, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models. By being close to absolute values instead of modified digital values, changes in detection that could not be found in the past can now be monitored.

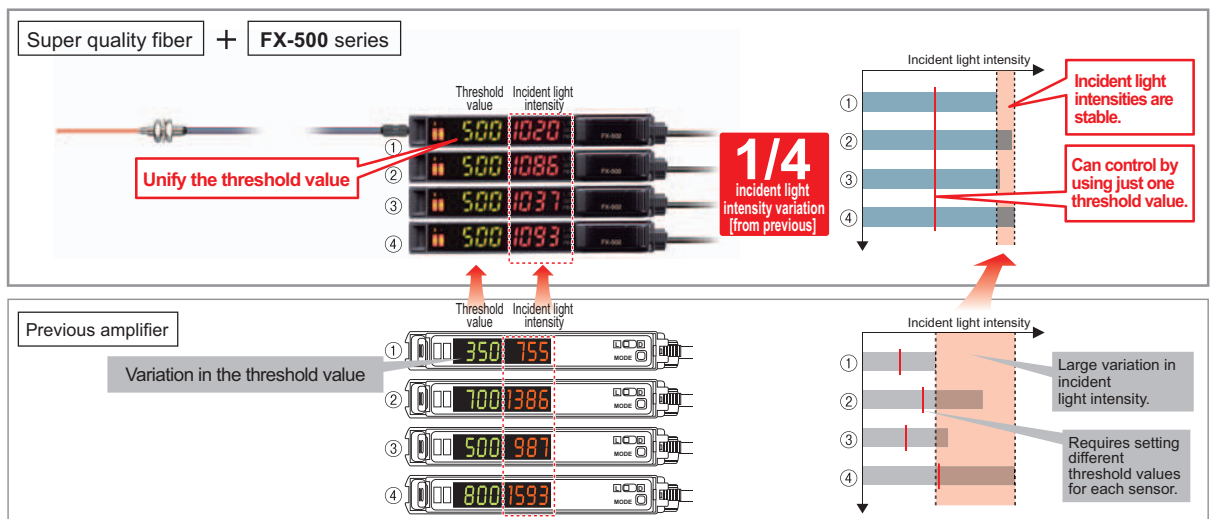

A quality that surpassed that of standard fibers!


New fibers developed using a new manufacturing method adopted by our own factory along with a persistent quality control system.

The basic performance of a standard fiber is greatly enhanced!

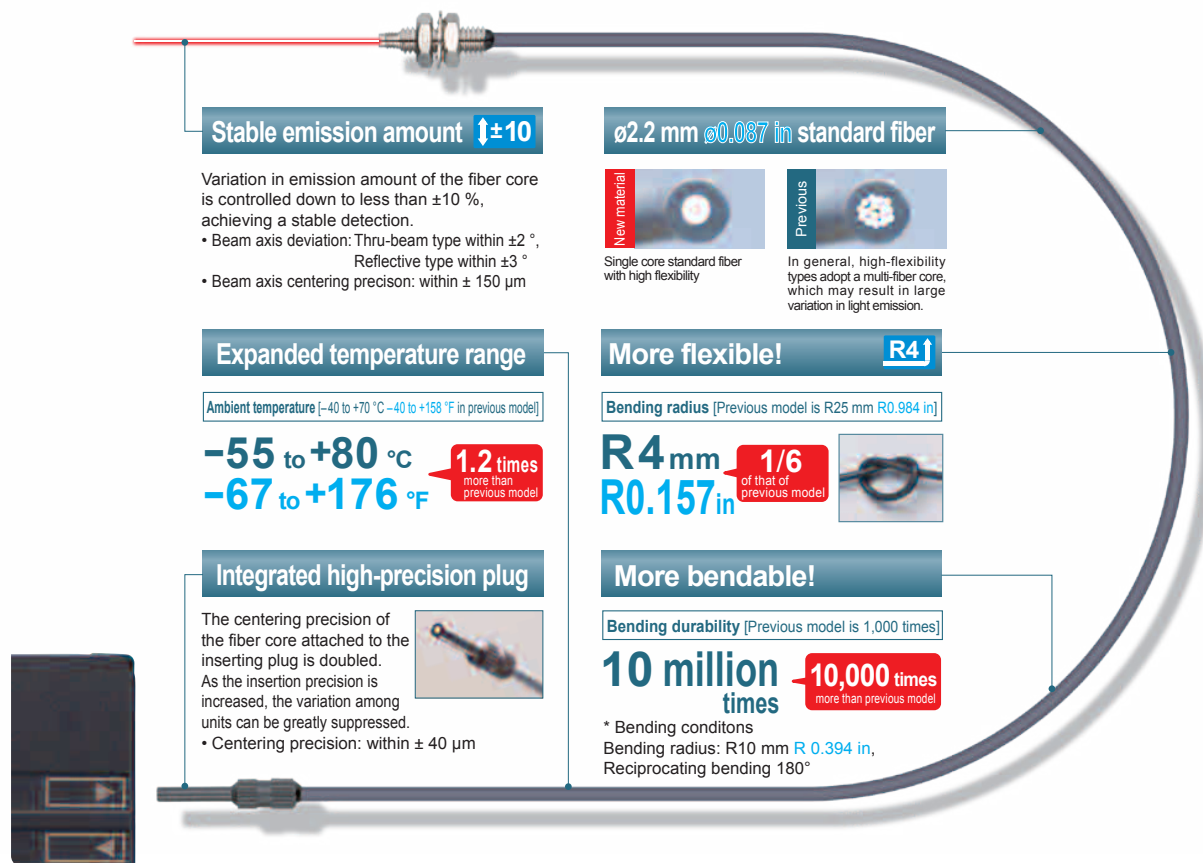

Max. 25 μs response time


FX-500 with its high response time contributes to improve productivity.

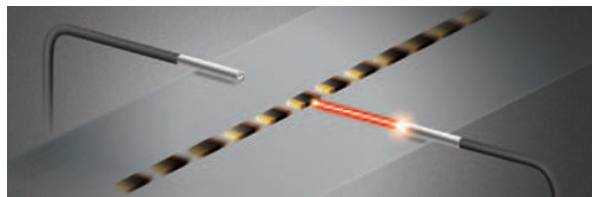

Performing minute object detection when using a small diameter fiber is now possible with a high response time and longer sensing range.

Hyper **HYPR mode** incorporated


FX-500 in combination with small diameter fibers which can handle challenging detections, allows long sensing range.

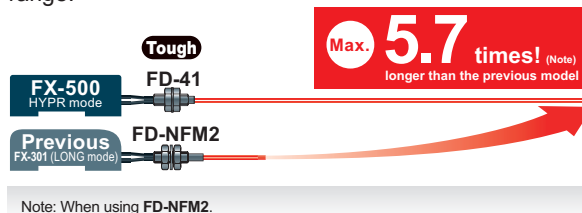


So accurate! Sharp detection with suppressed hysteresis

FX-500 with its accurate detection catches fractional differences in light intensity, achieving high precision and solving low-hysteresis applications.

- Long range detection of small objects with small difference in light intensity **H-02 mode**

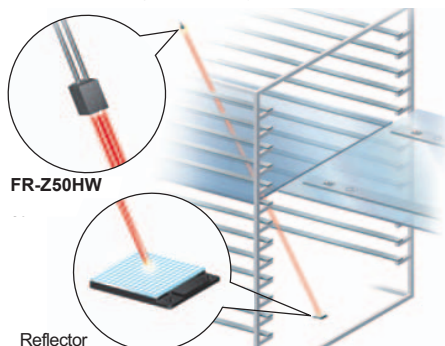

- Highly accurate detection while avoiding saturation **H-01 mode**



FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/ FX-301-F

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSLIGHT CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN MACHINE
INTERFACESENERGY CONSUMPTION
VISUALIZATION
COMPONENTS

FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
Guide

Fibers

Fiber
Amplifiers

FX-500

FX-100


FX-300

FX-410


FX-311

FX-301-F7/
FX-301-F**Flat display with wide viewing angle**

The large and high-contrast 7-segment display of high luminance provides clear visibility from a wide angle of view.

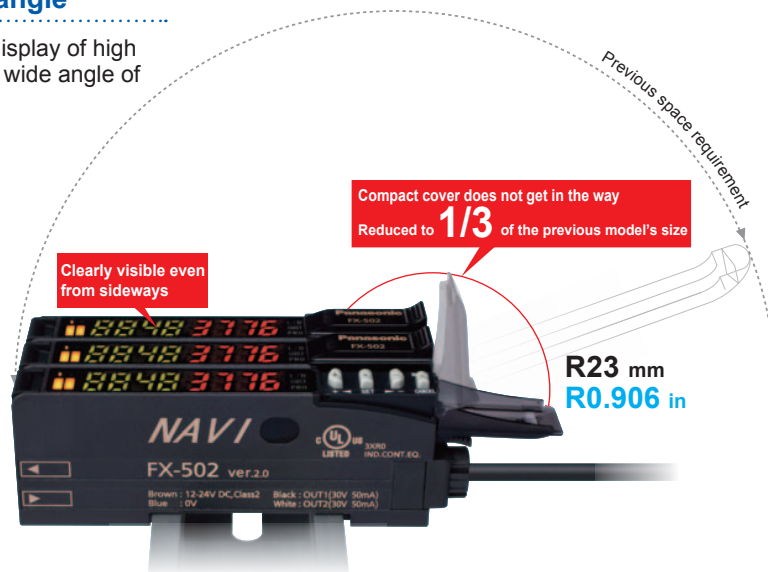**Resolves variation in displayed incident light intensity
Display adjustment setting**

The variation in display can be adjusted to random values. This helps to define proper instruction in a work order.

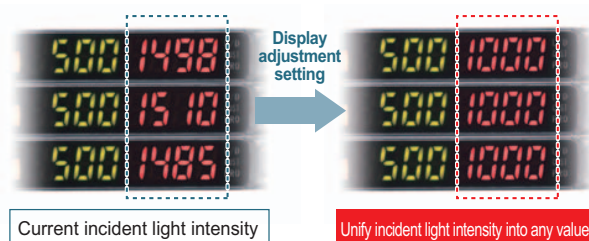**Stable detection over long and short periods
Stabilized emission amount**

The "four-chemical emitting element", which we are the first to incorporate to maintain a stable level of light emission, has now become an industry standard. **FX-500** series continues to adopt the same emitting element as well as the "APC (Auto Power Control) circuit" which improves stability in short periods such as when the power is turned on.

**Saves maintenance time
Threshold tracking function**

This function performs automatic setting to threshold value by checking the incident light intensity at desired intervals in order to follow the changes in the light amount resulting from changes in the environment over long periods (such as dust). This contributes to reduction in maintenance hours.

**Suitable for preventative maintenance
Self-diagnosis output****FX-502(P)
FX-505(P)-C2**

FX-502(P) / 505(P)-C2 can set Output 2 as a self-diagnosis output. When the teaching of Output 1's threshold value is carried out, Output 2 is set concurrently with the setting randomly shifted by the amount of surplus of threshold value. Light intensity deterioration due to fiber breakage or dust accumulation can be notified as an alarm output.


■ Detect deterioration in light intensity
(e.g. Useful in dusty environment)



Self-diagnosis can be used with the threshold tracking function for added effectiveness.


**Stable detection while being eco-friendly
Emission power & gain setting**

In cases when the incident light intensity is saturated, the light emitting amount can be adjusted to the optimal level by AUTO without changing the response time. This allows stable detection with an optimal S/N ratio and saves energy by controlling the emitting electric current.

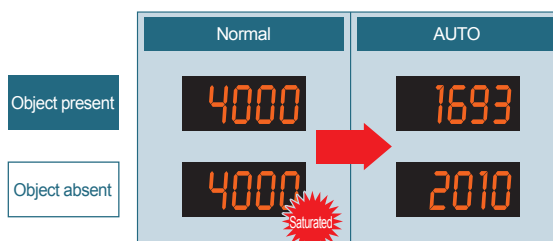

Auto mode (AUTO) and 3-level manual mode (H / M / L [fine-adjustable]) are incorporated.

■ Detecting a transparent sheet




Built-in logic functions


No PLC necessary, saving material and programming costs

Logical calculation functions


3 logical calculations (AND, OR, XOR) are available with fiber sensor only. 3 logical operations can be selected against Output 1. Additional controller is not required so both wire-saving and cost reduction can be achieved.



Calculation of two neighboring amplifiers



Calculation of two outputs in one amplifier **FX-502(P) / 505(P)-C2**




Calculation of one amplifier and external input **FX-502(P) / 505(P)-C2**



Equipped with 5 timer types

A wide variety of timer control operations can be carried out by fiber sensors only.

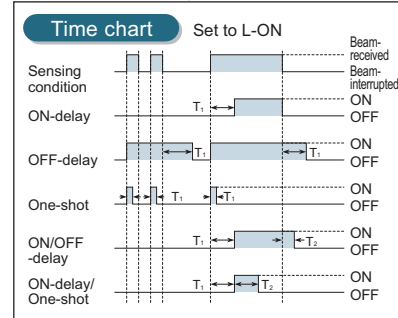


Timer period: 0.05 ms to 32 s
Output 1 has ON / OFF-delay and ON-delay / One-shot timers are available.


Analog output cable type

FX-505(P)-C2

To monitor the sensing of objects, a 4 to 20 mA analog current is output in response to the digital value of the incident light intensity.



Edge tracking of film or sheet



The meandering path can be monitored as the light intensity changes.

Smooth setup changes by 8 data banks

The number of data banks used for saving the setup conditions of the amplifier is increased to eight. Setup conditions can be saved and loaded to make setup changes easy at a worksite where multiple models are manufactured.

Remote control improves work efficiency by external input

FX-502(P) / FX-505(P)-C2


Work efficiency can be improved by operating via PLC output or other external signal. (FX-502(P) can operate via external signal when switching from Output 2 to external input.)

Functions operable by external input

Full-auto / Limit / 2-point teaching	Display adjustment setting
Data bank load / save	Logical calculation (self-unit only)
Emission halt	Copying function lock (self-unit only)


An optical communication function allows sensors to be adjusted simultaneously

The data that is currently set can be copied and saved all at once for all amplifiers connected together from the right side thanks to the optical communication function. This greatly reduces troublesome setup tasks and makes setup much smoother.

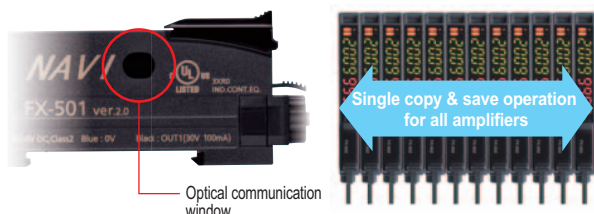

No need to specify a main unit or sub unit

All FX-500 amplifiers can be used as either a main unit or a sub unit. Just use a main cable or a sub cable to distinguish the two. This reduces the costs of inventory management.

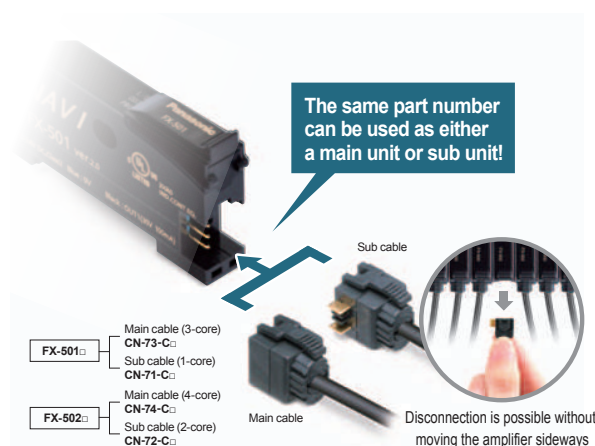

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7 / FX-301-F

ORDER GUIDE

Amplifiers

Quick-connection cable is not supplied with **FX-501(P)** and **FX-502(P)**. Please order it separately.

Type	Appearance	Model No.	Emitting element	Output	External input
Standard type		FX-501	Red LED	NPN open-collector transistor	—
		FX-501P		PNP open-collector transistor	
2-output type		FX-502		NPN open-collector transistor 2 outputs	Incorporated (Switchable with Output 2)
		FX-502P		PNP open-collector transistor 2 outputs	
Cable type		FX-505-C2		NPN open-collector transistor 2 outputs analog output	Incorporated
		FX-505P-C2		PNP open-collector transistor 2 outputs analog output	

Quick-connection cables


For FX-501(P)

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description	
Main cable (3-core)	CN-73-C1	Length: 1 m 3.281 ft	0.2 mm ² 3-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø0.130 in
	CN-73-C2	Length: 2 m 6.562 ft	
	CN-73-C5	Length: 5 m 16.404 ft	
Sub cable (1-core)	CN-71-C1	Length: 1 m 3.281 ft	0.2 mm ² 1-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø0.130 in Connectable to a main cable up to 15 cables.
	CN-71-C2	Length: 2 m 6.562 ft	
	CN-71-C5	Length: 5 m 16.404 ft	


Main cable

• **CN-73-C□**



Sub cable

• **CN-71-C□**




For FX-502(P)

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description	
Main cable (4-core)	CN-74-C1	Length: 1 m 3.281 ft	0.2 mm ² 4-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø0.130 in
	CN-74-C2	Length: 2 m 6.562 ft	
	CN-74-C5	Length: 5 m 16.404 ft	
Sub cable (2-core)	CN-72-C1	Length: 1 m 3.281 ft	0.2 mm ² 2-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø0.130 in Connectable to a main cable up to 15 cables.
	CN-72-C2	Length: 2 m 6.562 ft	
	CN-72-C5	Length: 5 m 16.404 ft	


Main cable

• **CN-74-C□**




Sub cable

• **CN-72-C□**



End plates

End plates are not supplied with the amplifier. Please order them separately when the amplifiers are mounted in cascade.


Appearance	Model No.	Description
	MS-DIN-E	When amplifiers are mounted in cascade, or when an amplifier moves depending on the way it is installed on a DIN rail, these end plates clamp amplifiers into place on both sides. Make sure to use end plates when cascading multiple amplifiers together. Two pcs. per set

OPTIONS

Designation	Model No.	Description
Amplifier mounting bracket	MS-DIN-2	Mounting bracket for amplifier


Amplifier mounting bracket

• MS-DIN-2



Accessory

- **FX-MB1** (Amplifier protection seal)
10 sets of 2 communication window seals and 1 connector seal



LIST OF FIBERS

Super quality

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in)		Beam axis dia. (mm)	Beam axis position / Inclination of beam axis	Optical transmission loss	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP						
Threaded	M3	Tough FT-30	R2 Bending durability	2 m	STD 400 15.748 HYPR 1,350 53.150	810 31.890 650 25.591 210 8.268 75 2.953	ø0.5	150 μm / ±2°	±10 %	IP67	-55 to +80 °C	P.51
	M4	Tough FT-40	R4 Bending durability		STD 1,200 47.244 HYPR 3,600 141.732	2,200 86.614 1,700 66.929 530 20.866 190 7.480	ø1					
Cylindrical	ø1.5	Tough FT-S20	R2 Bending durability		STD 400 15.748 HYPR 1,350 53.150	810 31.890 650 25.591 210 8.268 75 2.953	ø0.5					P.55
	ø3	Tough FT-S30	R4 Bending durability		STD 1,200 47.244 HYPR 3,600 141.732	2,200 86.614 1,700 66.929 530 20.866 190 7.480	ø1					

Note: The fiber cable length practically limits the sensing range.

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in) (Note)		Beam axis position / Inclination of beam axis	Optical transmission loss	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP					
Threaded	M3	Tough FD-30	R2 Bending durability	2 m	STD 160 6.299 HYPR 600 23.622	330 12.992 250 9.843 80 3.150 25 0.984	150 μm / ±3°	±10 %	IP67	-55 to +80 °C	P.59
	M4	Tough FD-40									
	M6	Tough FD-60	R4 Bending durability		STD 520 20.472 HYPR 1,550 61.024	900 35.433 740 29.134 260 10.236 90 3.543					P.60
Cylindrical	ø3	Tough FD-S30			STD 160 6.299 HYPR 600 23.622	330 12.992 250 9.843 80 3.150 25 0.984					P.67

Note: The sensing range is specified for white non-glossy paper.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm [R0.394 in](#), reciprocating bending: 180°) and more flexible (bending radius: R4 mm [R0.157 in](#) or less) features.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7 / FX-301-F

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS/
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMS

LIST OF FIBERS

Threaded type

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Beam axis position / Inclination of beam axis	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP					
Threaded	M3	Tough FT-31	R2 Bending durability	2 m	STD 315 12.402 HYPR 1,350 53.150	770 30.315 550 21.654 210 8.268 70 2.756	ø0.5	150 µm / ±2°	IP67	-55 to +80 °C	P.51
		FT-31W	R1		STD 260 10.236 HYPR 990 38.976	590 23.228 440 17.323 150 5.906 53 2.087		150 µm / ±3°		-40 to +60 °C	
	M4	FT-43	R4 Bending durability	2 m	STD 1,400 55.118 HYPR (Note 2) 3,600 141.732	2,800 110.236 2,100 82.677 770 30.315 240 9.449	ø1.5	150 µm / ±2°		-55 to +80 °C	
		Tough FT-42	R4 Bending durability		STD 1,130 44.488 HYPR (Note 2) 3,600 141.732	2,050 80.709 1,600 62.992 530 20.866 190 7.480		150 µm / ±2°		-55 to +80 °C	
		FT-42W	R1		STD 800 31.496 HYPR 3,300 129.921	1,900 74.803 1,400 55.118 490 19.291 160 6.299		150 µm / ±3°		-40 to +60 °C	
		FT-45X	R4		STD 1,200 47.244 HYPR (Note 2) 1,600 62.992	1,600 62.992 (Note 2) 1,600 62.992 (Note 2) 630 24.803 200 7.874		150 µm / ±2°		-55 to +80 °C	P.52
		Tough FT-R40	R4 Bending durability		STD 930 36.614 HYPR (Note 2) 3,600 141.732	1,750 68.898 1,500 59.055 500 19.685 160 6.299		150 µm / ±2°		-55 to +80 °C	P.54
		FT-140	R4 Bending durability		STD (Note 2) 19,600 771.654 HYPR (Note 2) 19,600 771.654	19,600 771.654 (Note 2) 19,600 771.654 (Note 2) 16,000 629.921 6,300 248.031		—		-40 to +70 °C	P.51
	M14	Long range		10 m							
	Elbow										
	With expansion lens										

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Selection
Guide

Fibers

Fiber
Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/
FX-301-F















Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

LIST OF FIBERS

Threaded type

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Beam axis position / Inclination of beam axis	Protection	Ambient temp.	Dimensions	
					FX-500 series	U-LG LONG FAST H-SP					
M3		Tough FD-31	R2 Bending durability	2 m	STD 125 4.921 HYPR 515 20.276	290 11.417 220 8.661 80 3.150 25 0.984	150 μm / ±3°	IP67	-55 to +80 °C	P.59	
		FD-31W	R1		STD 80 3.150 HYPR 330 12.992	180 7.087 140 5.512 45 1.772 12 0.472	—		-40 to +60 °C		
		Tough FD-32G	R2 Bending durability	1 m (Note 3)	STD 200 7.874 HYPR 650 25.591	380 14.961 270 10.630 95 3.740 27 1.063	—	IP40	-55 to +80 °C		
		FD-32GX	R2		STD 200 7.874 HYPR 630 24.803	410 16.142 360 14.173 100 3.937 30 1.181	—		-55 to +80 °C		
		FD-EG30	R4	500 mm	STD 48 1.890 HYPR 170 6.693	130 5.118 110 4.331 30 1.181 9 0.354	—	-40 to +70 °C	P.61		
		FD-EG31			STD 20 0.787 HYPR 85 3.346	45 1.772 35 1.378 12 0.472 3.5 0.138	—	-20 to +60 °C	P.62		
Threaded	M4		Tough FD-41	R2 Bending durability	2 m	STD 125 4.921 HYPR 515 20.276	290 11.417 220 8.661 80 3.150 25 0.984	150 μm / ±3°	IP67	-55 to +80 °C	P.59
			FD-41W	R1		STD 270 10.630 HYPR 900 35.433	630 24.803 430 16.929 150 5.906 45 1.772	—		-40 to +60 °C	
			Tough FD-42G	R2 Bending durability	2 m	STD 200 7.874 HYPR 650 25.591	380 14.961 270 10.630 95 3.740 27 1.063	—	IP40	-55 to +80 °C	P.60
			FD-42GW	R1		STD 150 5.906 HYPR 670 26.378	340 13.386 280 11.024 90 3.543 25 0.984	—		-40 to +60 °C	
M6		FD-62	R4 Bending durability	2 m	STD 520 20.472 HYPR 1,500 59.055	1,000 39.370 940 37.008 340 13.386 110 4.331	150 μm / ±3°	IP67	-55 to +80 °C	P.60	
		Tough FD-61			STD 450 17.717 HYPR 1,400 55.118	840 33.071 670 26.378 200 7.874 70 2.756	—		-55 to +80 °C		
		FD-61W	R1		STD 270 10.630 HYPR 900 35.433	630 24.803 430 16.929 150 5.906 45 1.772	—		-40 to +60 °C		
		Tough FD-61G	R4 Bending durability	1 m	STD 420 16.535 HYPR 1,100 43.307	800 31.496 650 25.591 200 7.874 60 2.362	—	IP40	-55 to +80 °C	P.61	
		FD-64X	R4		STD 280 11.024 HYPR 670 26.378	500 19.685 410 16.142 160 6.299 50 1.969	—		-55 to +80 °C		
Elbow		Tough FD-R60	R4 Bending durability	2 m	STD 290 11.417 HYPR 1,100 43.307	600 23.622 550 21.654 190 7.480 65 2.559	150 μm / ±3°	IP67		P.66	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range is specified for white non-glossy paper.

3) The allowable cutting range is 700 mm 27.559 in from the end that the amplifier inserted.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7I

FX-301-F

LIST OF FIBERS

Square head type

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (Fiber Core) (mm)	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP				
Square head	M3 	Tough FT-R31	R2 Bending durability	2m	STD 270 10.630 HYPR 1,000 39.370	580 22.835 440 17.323 160 6.299 55 2.165	ø0.5	IP67	-55 to +80 °C	P.54
	Lens mountable M4 	Tough FT-R43	R4 Bending durability		STD 720 28.346 HYPR 3,000 118.110	1,600 62.992 1,100 43.307 430 16.929 130 5.118	ø1	IP40	-40 to +60 °C	P.54
	With expansion lens M4 	FT-R41W	R1		STD 800 31.496 HYPR 3,200 125.984	1,800 70.866 1,400 55.118 460 18.110 150 5.906	ø1	IP40	-40 to +60 °C	P.54
	Cable-protection type Compatible with lens M4 	Tough FT-R42W	R1		STD 2,200 86.614 HYPR (Note2) 3,600 141.732	3,600 141.732 (Note 2) 3,500 137.795 1,300 51.181 460 18.110	ø2.2	IP67 (Note 3)	-55 to +80 °C	P.55
	Full-protection type M6 	Tough FT-R44Y	R4 Bending durability		STD 720 28.346 HYPR 3,000 118.110	1,600 62.992 1,100 43.307 430 16.929 130 5.118	ø1	IP67 (Note 3)	-55 to +80 °C	P.55
	Full-protection type M6 	Tough FT-R60Y	R4 Bending durability		STD 2,100 82.677 HYPR (Note2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,260 49.606 400 15.748	ø3.5	IP68G	-55 to +80 °C	P.55

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.
3) The fiber part is oil-resistant.

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Beam axis dia. (Fiber Core) (mm)	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP				
Square head	Coaxial, Lens mountable M3 	Tough FD-R31G	R2 Bending durability	2m	STD 310 12.205 170 6.693 HYPR 530 20.866	260 10.236 85 3.346 27 1.063	Emitter ø0.5	IP40	-55 to +80 °C	P.66
	Coaxial, Lens mountable M3 	FD-R32EG	R4	500mm	STD 45 1.772 HYPR 170 6.693	110 4.331 92 3.622 30 1.181 9 0.354	Emitter ø0.25	IP40	-40 to +70 °C	P.66
	Coaxial, Lens mountable M3 	FD-R34EG	R4	500mm	STD 38 1.496 HYPR 130 5.118	90 3.543 70 2.756 23 0.906 7 0.276	Emitter ø0.175	IP40	-40 to +70 °C	P.66
	Coaxial, Lens mountable M3 	FD-R33EG	R4	500mm	STD 19 0.748 HYPR 84 3.307	44 1.732 33 1.299 11 0.433 3 0.118	Emitter ø0.125	IP40	-20 to +60 °C	P.66
	Cable-protection type M6 	Tough FD-R41	R2 Bending durability	2m	STD 210 8.268 HYPR 710 27.953	430 16.929 320 12.598 100 3.937 34 1.339	ø0.75	IP67	-55 to +80 °C	P.66
	Cable-protection type M6 	Tough FD-R61Y	R4 Bending durability	2m	STD 280 11.024 HYPR 990 38.976	610 24.016 435 17.126 160 6.299 50 1.969	—	IP67 (Note 3)	-55 to +80 °C	P.66

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.
3) The fiber part is oil-resistant.




Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

LIST OF FIBERS**Cylindrical type****Thru-beam type (one pair set)**

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length ✂ : Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Beam axis position / Inclination of beam axis	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG FAST LONG H-SP					
Cylindrical	ø1	Tough FT-S11	R2	500 mm	STD 90 3.543 HYPR 350 13.780	210 8.268 160 6.299 60 2.362 19 0.748	ø0.25	—	IP67	-55 to +80 °C	P.55
	ø1.5	Tough FT-S21	Bending durability	STD 315 12.402 HYPR 1,350 53.150	770 30.315 550 21.654 210 8.268 70 2.756	ø0.5	150 μm / ±2°				
		FT-S21W	R1	STD 260 10.236 HYPR 990 38.976	590 23.228 440 17.323 150 5.906 53 2.087		150 μm / ±3°	-40 to +60 °C			
	ø2.5	With lens, Long sensing range FT-S32	R10 Bending durability	2 m	STD 3,100 122.047 HYPR (Note2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,800 70.866 600 23.622	ø2	—	IP40	-40 to +70 °C	
	ø3	FT-S31W	R1	2 m	STD 800 31.496 HYPR 3,300 129.921	1,900 74.803 1,400 55.118 490 19.291 160 6.299	ø1	150 μm / ±3°	—	-40 to +60 °C	
Ultra-small diameter	ø0.3	Narrow beam ø0.125mm Sleeve part cannot be bent. FT-E13	R2	1 m	STD 15 0.591 HYPR 52 2.047	30 1.181 24 0.945 8 0.315 2 0.079	ø0.125	—	IP67	-40 to +70 °C	P.52
		Narrow beam ø0.25mm Sleeve part cannot be bent. FT-E23	Bending durability		STD 75 2.953 HYPR 270 10.630	160 6.299 125 4.921 42 1.654 13 0.512	ø0.25	—			
Side-view	ø4	Tough FT-V40	R4 Bending durability	2 m	STD 3,500 137.795 HYPR (Note2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,400 94.488 850 33.465	ø2.5	—	IP50	-40 to +60 °C	P.56

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Reflective type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Beam axis position / Inclination of beam axis	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG FAST LONG H-SP				
Cylindrical	ø1.5	Tough FD-S21	R2 Bending durability	1 m	STD 80 3.150 HYPR 190 7.480	130 5.118 110 4.331 37 1.457 11 0.433	—	IP40	-55 to +80 °C	P.66
	ø3	Tough FD-S32	R4 Bending durability	 2 m	STD 420 16.535 HYPR 1,200 47.244	790 31.102 660 25.984 220 8.661 75 2.953	150 μm / ±3°	IP67		-40 to +60 °C
		FD-S32W	R1		STD 270 10.630 HYPR 900 35.433	630 24.803 430 16.929 150 5.906 45 1.772	—			
		Tough FD-S31	R2 Bending durability		STD 125 4.921 HYPR 515 20.276	290 11.417 220 8.661 80 3.150 25 0.984	150 μm / ±3°			
		FD-S33GW	R1		STD 150 5.906 HYPR 670 26.378	340 13.386 280 11.024 90 3.543 25 0.984	—		IP40	
ø5.5	Metal-free  — (16) —	Tough NEW FD-S60Y	R4 Bending durability	 2 m (Note 4)	STD 320 12.598 HYPR 600 23.622	590 23.228 420 16.535 200 7.874 75 2.953	—	IP68G	-40 to +70 °C	
Ultra-small diameter	ø1.5	 Sleeve part cannot be bent.	R4	1 m	STD 12 0.472 HYPR 50 1.969	29 1.142 25 0.984 7 0.276 2 0.079	—	IP40	-40 to +60 °C	P.61
	ø3	 Sleeve part cannot be bent.			STD 55 2.165 HYPR 170 6.693	120 4.724 80 3.150 30 1.181 9 0.354	—		-40 to +70 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.
3) The allowable cutting range is 500 mm 19.685 in from the end that is inserted to the amplifier.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/

FX-301-F

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F / FX-301-F

LIST OF FIBERS

Sleeve

Thru-beam type (one pair set)











Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Beam axis dia. (mm)	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP				
Threaded	M3 Sleeve 40mm M3 ø0.88 10	Tough FT-31S	R2 Bending durability (Note 3)	2 m	STD 315 12.402 HYPR 1,220 48.031	740 29.134 550 21.654 195 7.677 63 2.480	ø0.5	IP67	-55 to +80 °C	P.51
	M4 Sleeve 40mm M4 ø1.48 12	Tough FT-42S	R4 Bending durability (Note 3)	2 m	STD 1,130 44.488 HYPR 3,600 141.732	2,050 80.709 1,600 62.992 530 20.866 190 7.480	ø1			
	Ultra-small diameter ø3 Narrow beam ø0.125mm Sleeve part cannot be bent. ø0.25 5 15	Tough FT-E13	R2 Bending durability	1 m	STD 15 0.591 HYPR 152 2.047	30 1.181 24 0.945 8 0.315 2 0.079	ø0.125			
	ø3 Narrow beam ø0.25mm Sleeve part cannot be bent. ø0.4 5 15	Tough FT-E23	R2 Bending durability	1 m	STD 75 2.953 HYPR 270 10.630	160 6.299 125 4.921 42 1.654 13 0.512	ø0.25			
Cylindrical	Side-view ø2 Sleeve part cannot be bent. ø1 ø2 20 15	Tough FT-V23	R4 Bending durability	2 m	STD 450 17.717 HYPR 1,800 70.866	1,000 39.370 880 34.646 280 11.024 90 3.543	ø0.75	IP30	-55 to +80 °C	P.55
	ø2 Sleeve part cannot be bent. ø1 ø2 15 15	Tough FT-V25	R2 Bending durability	2 m	STD 240 9.449 HYPR 900 35.433	550 21.654 480 18.898 140 5.512 45 1.772	ø0.5			
	ø2 Sleeve part cannot be bent. ø1 ø2 15 15	Tough FT-V24W	R1	2 m	STD 110 4.331 HYPR 380 14.961	230 9.055 200 7.874 60 2.362 20 0.787	ø0.5			
	ø2.5 Sleeve part cannot be bent. ø1.5 ø2.5 20 15	Tough FT-V30	R4 Bending durability	2 m	STD 680 26.772 HYPR 2,200 86.614	1,200 47.244 1,000 39.370 340 13.386 100 3.937	ø1.0			

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range. 3) Bending radius of sleeve part is R10 mm R0.394 in or more.

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions	
					FX-500 series	U-LG LONG FAST H-SP				
Threaded	Ultra-small diameter M3  Sleeve 15 mm M3 ø0.8 15 Sleeve part cannot be bent.	FD-EG30S	R4	1 m	STD 50 1.969 HYPR 170 6.693	110 4.331 80 3.150 30 1.181 9 0.354	IP40	-40 to +70 °C	P.62	
	M4  Sleeve 40 mm M4 ø1.48 12 Sleeve part cannot be bent.	Tough FD-41S	R2 Bending durability (Note 3)	2 m	STD 125 4.921 HYPR 515 20.276	290 11.417 220 8.661 80 3.150 25 0.984	IP67	-55 to +80 °C	P.59	
	M4  Sleeve 40 mm M4 ø1.48 12 Sleeve part cannot be bent.	FD-41SW	R1 (Note 3)		STD 80 3.150 HYPR 330 12.992	180 7.087 140 5.512 45 1.772 12 0.472		-40 to +60 °C		
	M6  Sleeve 40 mm M6 ø2.5 15 Sleeve part cannot be bent.	Tough FD-61S	R4 Bending durability (Note 3)	STD 420 16.535 HYPR 1,200 47.244	790 31.102 660 25.984 220 8.661 75 2.953	-55 to +80 °C	P.60			
Cylindrical	Ultra-small diameter ø1.5 ø0.48  Sleeve 15 mm ø1.5 ø0.48 15 Sleeve part cannot be bent.	FD-E13	R4	1 m	STD 12 0.472 HYPR 50 1.969	29 1.142 25 0.984 7 0.276 2 0.079	IP40	-40 to +60 °C	P.61	
	ø3  Sleeve 15 mm ø3 ø0.63 15 Sleeve part cannot be bent.	FD-E23			STD 55 2.165 HYPR 170 6.693	120 4.724 80 3.150 30 1.181 9 0.354		-40 to +70 °C		
	Side-view	ø3  Small diameter ø3 ø1.5 15 Sleeve part cannot be bent.	Tough FD-V30	R2 Bending durability	2 m	STD 65 2.559 HYPR 240 9.449	130 5.118 120 4.724 35 1.378 14 0.551	IP30	-55 to +80 °C	P.67
		ø3  Sleeve 15 mm ø3 ø1.5 15 Sleeve part cannot be bent.	FD-V30W	R1		STD 20 0.787 HYPR 80 3.150	40 1.575 30 1.181 10 0.394 2 0.079		-40 to +60 °C	
		ø5  Sleeve 15 mm ø5 ø2 20 Sleeve part cannot be bent.	Tough FD-V50	R4 Bending durability		STD 120 4.724 HYPR 370 14.567	220 8.661 210 8.268 75 2.953 25 0.984		-55 to +80 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range is specified for white non-glossy paper. 3) Bending radius of sleeve part is R10 mm R0.394 in or more.











Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

LIST OF FIBERS

Flat type

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Protection	Ambient temp.	Dimensions				
					FX-500 series	U-LG LONG FAST H-SP								
Flat	 Top sensing W3 × H8 × D12	Tough FT-Z30H	R2 Bending durability	2 m	STD  3,500 137.795	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	2 × 3	IP40	-40 to +60 °C	P.57				
	 Top sensing W3 × H8 × D12	FT-Z30HW	R1		HYPR  (Note 2) 3,600 141.732	2,600 102.362 810 31.890								
	 Side sensing W3 × H12 × D8	Tough FT-Z30E	R2 Bending durability		STD  3,500 137.795	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)								
	 Side sensing W3 × H12 × D8	FT-Z30EW	R1		HYPR  (Note 2) 3,600 141.732	2,400 94.488 740 29.134								
	 Front sensing W8.5 × H12 × D3	Tough FT-Z30	R2 Bending durability		STD  3,400 133.858	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)								
	 Front sensing W8.5 × H12 × D3	FT-Z30W			HYPR  (Note 2) 3,600 141.732	2,000 78.740 630 24.803								
	With boss	 Front sensing W10 × H7 × D2	FT-Z20W	R1	1 m	STD  620 24.409	1,500 59.055 1,100 43.307 420 16.535 130 5.118			ø1.5	IP67		P.56	
		 Fiber bending type W2 × H10 × D10	FT-Z20HBW			HYPR  (Note 2) 1,600 62.992	670 26.378 570 22.441 180 7.087 55 2.165							
		 Front sensing W14 × H7 × D3.5	FT-Z40W											
		 Fiber bending type W3.5 × H14 × D11	FT-Z40HBW											
		2 m												

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length ✂ : Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
Flat	Front sensing  W10 × H7 × D2	FD-Z20W	R1	✂ 1 m	STD 1 to 65 0.039 to 2.559 HYPR 260 10.236	150 5.906 130 5.118 2 to 45 0.079 to 1.772 5 to 13 0.197 to 0.512	IP40	-40 to +60 °C	P.68
	Fiber bending type  W2 × H10 × D10	FD-Z20HBW			STD 2 to 85 0.079 to 3.346 HYPR 260 10.236	1 to 210 0.039 to 8.268 1 to 180 0.039 to 7.087 2 to 55 0.079 to 2.165 3 to 15 0.118 to 0.591	IP67		
	Front sensing  W14 × H7 × D3.5	FD-Z40W		✂ 2 m	STD 190 7.480 HYPR 790 31.102	440 17.323 390 15.354 1 to 120 0.039 to 4.724 2 to 35 0.079 to 1.378	IP40		
	Fiber bending type  W3.5 × H14 × D11	FD-Z40HBW			STD 260 10.236 HYPR 760 29.921	540 21.260 470 18.504 1 to 160 0.039 to 6.299 2 to 50 0.079 to 1.969	IP67		

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

SELECTION GUIDE

FIBERS

FIBER AMPLIFIERS

FX-500

FX-100

FX-300

FX-410

FX-311








FX-301-F7I

FX-301-F

LIST OF FIBERS

Small spot

High precision fiber & spot lens

Designation	Shape of head (mm) Dimensions	Spot diameter (mm in) (Note)	Distance to focal point (mm in) (Note)	Lens		Applicable fibers						
				Model No.	Ambient temp.	Model No.	Fiber cable length ✂: Free-cut	Bending radius (mm)	Protection	Ambient temp.	Dimensions	
Finest spot lens		ø0.1 ø0.004	7 ±0.5 0.276 ±0.020	FX-MR6	-20 to +60 °C	FD-EG31	500 mm	R4	IP40	-20 to +60 °C	P.62	
		ø0.2 ø0.008				FD-EG30				-40 to +70 °C	P.61	
		ø0.4 ø0.016				Tough FD-42G	✂ 2 m	R2 Bending durability		-55 to +80 °C	P.60	
						FD-42GW		R1		-40 to +60 °C		
						Tough FD-32G		R2 Bending durability		-55 to +80 °C	P.59	
		FD-32GX	✂ 1 m	R2	-40 to +60 °C	P.62						
		ø0.15 ø0.006	7.5 ±0.5 0.295 ±0.020	FX-MR3	-40 to +70 °C		FD-EG31	500 mm		R4	-20 to +60 °C	
		ø0.3 ø0.012					FD-EG30				-40 to +70 °C	P.61
		ø0.5 ø0.020					Tough FD-42G	✂ 2 m		R2 Bending durability	-55 to +80 °C	P.60
							FD-42GW			R1	-40 to +60 °C	
						FD-32G	R2 Bending durability			-55 to +80 °C	P.59	
Pinpoint spot lens		ø0.5 ø0.020	6 ±1 0.236 ±0.039	FX-MR1	-40 to +70 °C	Tough FD-42G	2 m	R2 Bending durability		-55 to +80 °C	P.60	
		ø0.7 to ø2.0 ø0.028 to ø0.079	18.5 to 43 approx. 0.728 to 1.693 approx.	FX-MR2	-40 to +70 °C	FD-42GW		R1		-40 to +60 °C		
Zoom lens		ø0.7 to ø2.0 ø0.028 to ø0.079	18.5 to 43 approx. 0.728 to 1.693 approx.	FX-MR2	-40 to +70 °C	Tough FD-42G	✂ 2 m	R2 Bending durability		-55 to +80 °C	P.60	
	ø0.5 to ø3.0 ø0.020 to ø0.118	13 to 30 approx. 0.512 to 1.181 approx.	FX-MR5	-40 to +70 °C	FD-42GW	R1		-40 to +60 °C				
Zoom lens (Side-view type)		ø0.5 to ø3.0 ø0.020 to ø0.118	13 to 30 approx. 0.512 to 1.181 approx.	FX-MR5	-40 to +70 °C	Tough FD-42G	2 m	R2 Bending durability		-55 to +80 °C	P.60	
						FD-42GW		R1	-40 to +60 °C			

Note: Spot diameter, distance to focal point and sensing range are specified for **FX-500** series.

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311




FX-301-F7/
FX-301-F

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

LIST OF FIBERS

Small spot

Square head type M3, reflective type fiber & spot lens

Type	Spot diameter (mm in) (Note)	Distance to focal point (mm in) (Note)	Lens		Fiber				
			Shape (mm in) Dimensions	Model No.	Shape	Emitting fiber core (mm in)	Model No.		
Finest spot lens	ø0.1 ø0.004 approx.	7 ±0.5 0.276 ±0.020		FX-MR7		ø0.125 ø0.005	FD-R33EG		
	ø0.15 ø0.006 approx.					ø0.125 ø0.005	FD-EG31		
	ø0.2 ø0.008 approx.					ø0.175 ø0.007	FD-R34EG		
	ø0.2 ø0.008 approx.					ø0.25 ø0.010	FD-R32EG		
	ø0.4 ø0.016 approx.					ø0.25 ø0.010	FD-EG30		
						ø0.5 ø0.020	FD-R31G		
						ø0.5 ø0.020	FD-32G		
						ø0.5 ø0.020	FD-32GX		
						ø0.5 ø0.020	FD-42G		
	ø0.5 ø0.020	FD-42GW							
Type	Spot diameter (mm in) (Note)	Sensing range (mm in) (Note)	Lens		Applicable fibers				
			Shape (mm in)	Model No.	Emitting fiber core (mm in)	Model No.			
Zoom lens	ø0.4 to ø2.0 ø0.016 to ø0.079 approx.	10 to 30 0.394 to 1.181		FX-MR8	ø0.125 ø0.005	FD-R33EG, FD-EG31			
	ø0.4 to ø2.2 ø0.016 to ø0.087 approx.				ø0.175 ø0.007	FD-R34EG			
	ø0.5 to ø2.5 ø0.020 to ø0.098 approx.				ø0.25 ø0.010	FD-R32EG, FD-EG30			
	ø0.8 to ø3.5 ø0.031 to ø0.138 approx.				ø0.5 ø0.020	FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW			
Parallel light lens	ø4.0 ø0.157 approx.	0 to 30 0 to 1.181		FX-MR9	ø0.125 ø0.005	FD-R33EG, FD-EG31			
					ø0.175 ø0.007	FD-R34EG			
					ø0.25 ø0.010	FD-R32EG, FD-EG30			
					ø0.5 ø0.020	FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW			

Note: Spot diameter, distance to focal point and sensing range are specified for **FX-500** series.

FIBER SENSORS

LASER SENSORS

PHOTO- ELECTRIC SENSORS

MICRO PHOTO- ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE- SAVING UNITS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100



FX-300

FX-410

FX-311





FX-301-F/ FX-301-F

LIST OF FIBERS**Narrow beam****Thru-beam type (one pair set)**

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length  Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Inclination of beam axis	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP					
Narrow beam Side-view	Aperture angle 2° 	Tough FT-KS40	R2 Bending durability	 2 m	STD (Note 2)  3,600 141.732	3,600 141.732 (Note 2)	ø2.2	—	IP40	-40 to +60 °C	P.54
		HYPR (Note 2)  3,600 141.732	3,600 141.732 (Note 2)								
	Aperture angle 2° 	Tough FT-KV40			STD (Note 2)  3,600 141.732	3,600 141.732 (Note 2)					
		HYPR (Note 2)  3,600 141.732	3,600 141.732 (Note 2)								
	Aperture angle 2° 	FT-KV40W	R1 Bending durability		STD (Note 2)  3,600 141.732	3,600 141.732 (Note 2)					
		HYPR (Note 2)  3,600 141.732	3,100 122.047 940 37.008								
	Aperture angle 3° 	Tough FT-KV26	R2 Bending durability		STD  710 27.953	1,600 62.992 1,200 47.244 440 17.323 160 6.299					
		HYPR  2,500 98.425									

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Retroreflective type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
With polarizing filter	W5.2 × H9.5 × D16 	FR-Z50HW	R1	 2 m	STD  100 to 990 3.937 to 38.976 HYPR  100 to 1,900 3.937 to 74.803	100 to 1,400 3.937 to 55.118 100 to 1,200 3.937 to 47.244 100 to 780 3.937 to 30.709 100 to 490 3.937 to 19.291	IP40	-25 to +55 °C	P.58
Wafer mapping	W7.5 × H2.2 × D11.2 	Tough FR-KZ22E	R2		STD  15 to 310 0.591 to 12.205 HYPR  15 to 570 0.591 to 22.441	15 to 460 0.591 to 18.110 15 to 410 0.591 to 16.142 15 to 220 0.591 to 8.661 15 to 100 0.591 to 3.937	IP30	-40 to +60 °C	
Narrow beam	Top sensing W5.2 × H9.5 × D21 	Tough FR-KZ50H	Bending durability		STD  20 to 300 0.787 to 11.811 HYPR  20 to 1,000 0.787 to 39.370	20 to 800 0.787 to 31.496 20 to 400 0.787 to 15.748 20 to 200 0.787 to 7.874 20 to 200 0.787 to 7.874			
	Side sensing W9.5 × H25 × D5.2 	Tough FR-KZ50E							

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector. Refer to p.90 for the sensing range when **FR-Z50HW** is used in combination with a reflector (optional).

Reflective type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
Long range	W5.2 × H9.5 × D16 	FD-Z50HW	R1	2 m	STD 10 to 650 0.394 to 25.591 HYPR 10 to 2,500 0.394 to 98.425	10 to 1,100 0.394 to 43.307 10 to 1,000 0.394 to 39.370 10 to 410 0.394 to 16.142 15 to 130 0.591 to 5.118	IP40	-40 to +60 °C	P.68

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.






Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

LIST OF FIBERS

Wide beam

Thru-beam type (one pair set)





Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP				
Wide beam	 Sensing width 32mm W5 × H69 × D20	Tough FT-A32	R2 Bending durability	 2 m	STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,100 82.677	3.2 × 32	IP40	-40 to +60 °C	P.52
	Allows flexible wiring  Sensing width 32mm W5 × H69 × D20	FT-A32W	R1		STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,000 118.110			-40 to +55 °C	
	 Sensing width 11mm W4.2 × H31 × D13.5	Tough FT-A11	R2 Bending durability		STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,100 43.307	2.2 × 11		-40 to +70 °C	
	Allows flexible wiring  Sensing width 11mm W4.2 × H31 × D13.5	FT-A11W	R1		STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,300 51.181			-40 to +55 °C	
Array	 Sensing width 5.5mm W5 × H15 × D15	Tough FT-AL05	R2 Bending durability		STD 860 33.858 HYPR 2,300 90.551	1,550 61.024 1,500 59.055 500 19.685 170 6.693	0.25 × 5.5		-55 to +80 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
Wide beam	 W7 × H15 × D30	Tough FD-A16	R4 Bending durability	2 m	STD 200 7.874 HYPR Cannot use	200 7.874 200 7.874 140 5.512 75 2.953	IP40	-40 to +60 °C	P.61
Array	 W5 × H20 × D20	Tough FD-AL11	R2 Bending durability		STD 320 12.598 HYPR 670 26.378	530 20.866 510 20.079 180 7.087 50 1.969		-55 to +80 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/

FX-301-F

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm [R0.394 in](#), reciprocating bending: 180°) and more flexible (bending radius: R4 mm [R0.157 in](#) or less) features.









FIBER SENSORS

LIST OF FIBERS

Convergent reflective type

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
Glass substrate detection	Mapping  W25 × H7.3 × D30	FD-L32H	 R4 Bending durability	 4 m	STD 0 to 56 0 to 2.205 HYPR 0 to 110 0 to 4.331	0 to 87 0 to 3.425 0 to 74 0 to 2.913 1 to 38 0.039 to 1.496 Cannot use	IP40	-40 to +60 °C	P.66
	Alignment  W20 × H29 × D3.8	Tough FD-L30A	 R2 Bending durability	 3 m	STD 0 to 43 0 to 1.693 HYPR 0 to 43 0 to 1.693	0 to 43 0 to 1.693 0 to 43 0 to 1.693 0 to 42 0 to 1.654 0 to 29 0 to 1.142		0 to +70 °C	P.65
	Alignment  W23.5 × H29 × D4.5	Tough FD-L31A	 R4 Bending durability		STD 4 to 33 0.157 to 1.299 HYPR 3 to 35 0.118 to 1.378	4 to 33 0.157 to 1.299 4 to 33 0.157 to 1.299 4 to 32 0.157 to 1.260 5 to 25 0.197 to 0.984			
	Alignment  W17 × H29 × D3.8	Tough FD-L22A	 R2 Bending durability	 2 m	STD 0 to 24 0 to 0.945 HYPR 0 to 31 0 to 1.220	0 to 28 0 to 1.102 0 to 27 0 to 1.063 0 to 24 0 to 0.945 0 to 18 0 to 0.709			
	Seating confirmation  W18 × H29 × D3.8	Tough FD-L23		 3 m	STD 0 to 29 0 to 1.142 HYPR 0 to 30 0 to 1.181	0 to 30 0 to 1.181 0 to 30 0 to 1.181 0 to 28 0 to 1.102 1.5 to 24 0.059 to 0.945		-20 to +70 °C	
	Seating confirmation  W12 × H19 × D3	Tough FD-L11	 R4 Bending durability		STD 0 to 9.5 0 to 0.374 HYPR 0 to 11.5 0 to 0.453	0 to 10.5 0 to 0.413 0 to 10 0 to 0.394 0 to 9 0 to 0.354 0 to 8 0 to 0.315			
	Seating confirmation  W12 × H19 × D3	Tough FD-L10			STD 0 to 5 0 to 0.197 HYPR 0 to 6 0 to 0.236	0 to 5.5 0 to 0.217 0 to 5.5 0 to 0.217 0 to 4.5 0 to 0.177 0 to 4 0 to 0.157			
	 W24 × H21 × D4	Tough FD-L21	 R2 Bending durability	 2 m	STD 1.5 to 16 0.059 to 0.630 HYPR 1 to 19 0.039 to 0.748	1 to 18 0.039 to 0.709 1 to 18 0.039 to 0.709 2 to 15 0.079 to 0.591 3 to 12 0.118 to 0.472			
	 W24 × H21 × D4	FD-L21W	 R1		STD 3 to 14 0.118 to 0.551 HYPR 1.5 to 15 0.059 to 0.591	2 to 15 0.079 to 0.591 2 to 15 0.079 to 0.591 4 to 14 0.157 to 0.551 6.5 to 10 0.256 to 0.394			
General purpose	 W6 × H18 × D14	Tough FD-L20H	 R2 Bending durability		STD 23 0.906 HYPR 45 1.772	35 1.378 32 1.260 2 to 15 0.079 to 0.591 5 to 9 0.197 to 0.354	-40 to +70 °C		
Ultra-small	 W7.2 × H7.5 × D2	FD-L12W	 R1	 1 m	STD 8 0.315 HYPR 14 0.551	12.5 0.492 12 0.472 0.5 to 7 0.020 to 0.276 0.5 to 4 0.020 to 0.157	IP30	-40 to +60 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range is specified for transparent glass 100 × 100 × t0.7 mm 3.937 × 3.937 × t0.028 in (FD-L32H: R edge, FD-L21 and FD-L21W: t2 mm t0.079 in) (FD-L20H: white non-glossy paper, FD-L10: silicon wafers 100 × 100 mm 3.937 × 3.937 in).

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/
FX-301-F

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

LIST OF FIBERS

Retroreflective type

Retroreflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
With polarizing filters	W5.2 × H9.5 × D16 W30 × H30 × D0.5	FR-Z50HW	R1		STD 100 to 990 3.937 to 38.976 HYPR 100 to 1,900 3.937 to 74.803	100 to 1,400 3.937 to 55.118 100 to 1,200 3.937 to 47.244 100 to 780 3.937 to 30.709 100 to 490 3.937 to 19.291	IP40	-25 to +55 °C	
Wafer mapping	W7.5 × H2.2 × D11.2 Aperture angle 3° (emitter) W4 × H2 × D21.5	Tough FR-KZ22E			STD 15 to 310 0.591 to 12.205 HYPR 15 to 570 0.591 to 22.441	15 to 460 0.591 to 18.110 15 to 410 0.591 to 16.142 15 to 220 0.591 to 8.661 15 to 100 0.591 to 3.937			
Narrow beam	W5.2 × H9.5 × D21 W10.6 × H28 × D10.1	Tough FR-KZ50H	R2 Bending durability	2 m	STD 20 to 300 0.787 to 11.811 HYPR 20 to 1,000 0.787 to 39.370	20 to 800 0.787 to 31.496 20 to 400 0.787 to 15.748 20 to 200 0.787 to 7.874 20 to 200 0.787 to 7.874	IP30	-40 to +60 °C	P.58
	W9.5 × H25 × D5.2 W28 × H10.6 × D10.1	Tough FR-KZ50E							

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

The sensing range of **FR-KZ22E** is specified for the attached reflector.

The sensing range of **FR-KZ50E** and **FR-KZ50H** is specified for the attached reflector **RF-003**.

The sensing range of **FR-Z50HW** is specified for the **RF-13**.

2) The sensing range is the possible setting range for the attached reflector.

The fiber can detect an object less than setting range for the reflector.

However, note that if there are any white or highly-reflective surfaces near the fiber head, reflected incident light may affect the fiber head.

If this occurs, adjust the threshold value of the amplifier unit before use.

Sensing range when FR-Z50HW is used in combination with a reflector (optional)

Reflector model No.	Sensing range (mm in)					
	FX-500 series					
	HYPR	U-LG	LONG	STD	FAST	H-SP
RF-230	100 to 19,000 3.937 to 748.030	100 to 8,000 3.937 to 314.960	100 to 5,000 3.937 to 196.850	100 to 3,600 3.937 to 141.732	100 to 2,900 3.937 to 114.173	100 to 1,400 3.937 to 55.118
RF-220	100 to 8,000 3.937 to 314.960	100 to 4,700 3.937 to 185.039	100 to 3,500 3.937 to 137.795	100 to 3,000 3.937 to 118.110	100 to 1,800 3.937 to 70.866	100 to 830 3.937 to 32.677
RF-210	100 to 5,500 3.937 to 216.535	100 to 2,700 3.937 to 106.299	100 to 2,400 3.937 to 94.488	100 to 1,500 3.937 to 59.055	100 to 1,200 3.937 to 47.244	100 to 530 3.937 to 20.866

Note: The sensing range is the possible setting range for the reflector. The fiber can detect an object less than 100 mm 3.937 in. However, note that if there are any white or highly-reflective surfaces near the fiber head, reflected incident light may affect the fiber head. If this occurs, adjust the threshold value of the amplifier unit before use.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/
FX-301-F

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm 0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm 0.157 in or less) features.

LIST OF FIBERS

Chemical / oil-resistant

Thru-beam type (one pair set)

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP				
Oil-resistant	Cable-protection type Compatible with lens W7 × H9.5 × D15.5	Tough NEW FT-R44Y	R4 Bending durability	2 m	STD 720 28.346 HYPR 3,000 118.110	1,600 62.992 1,100 43.307 430 16.929 130 5.118	ø1	IP67 (Note 4)	-55 to +80 °C	P.55
	Full-protection type W10 × H11 × D21.2	Tough NEW FT-R60Y	R4 Bending durability	2 m	STD 2,100 82.677 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,260 49.606 400 15.748	ø3.5		-55 to +80 °C	P.55
Chemical-resistant	Easy mounting • Rectangular head SEMI S2 compliant W7 × H15 × D13 Metal-free	Tough FT-Z802Y	R4 Bending durability	2 m	STD 3,100 122.047 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,900 74.803 470 18.504			0 to +60 °C	P.57
	Heat-resistant 115 °C Metal-free ø5.5 (25)	FT-HL80Y	R30	2 m (Note 3)	STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,300 90.551 740 29.134	ø3.7	IP68G	-40 to +115 °C	P.53
	Metal-free ø5.5 (25)	FT-L80Y			STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,800 110.236 920 36.220			-40 to +70 °C	P.54
	Side-view Metal-free ø5.5 (25)	FT-V80Y			STD 1,300 51.181 HYPR (Note 2) 3,600 141.732	2,800 110.236 2,200 86.614 800 31.496 240 9.449	ø2.8		-40 to +70 °C	P.56

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.
 3) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted.
 4) The fiber part is oil-resistant.

Reflective type



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2)		Beam axis dia. (mm)	Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP				
Oil-resistant	Cable-protection type W10 × H11 × D15.5	Tough NEW FD-R61Y	R4 Bending durability	2 m	STD 280 11.024 HYPR 990 38.976	610 24.016 435 17.126 160 6.299 50 1.969	—	IP67 (Note 3)	-55 to +80 °C	P.66
Chemical-resistant	Metal-free ø5.5 (16)	Tough NEW FD-S60Y	Protective tube R30 mm Fiber R4 Bending durability	2 m (Note 4)	STD 320 12.598 HYPR 600 23.622	590 23.228 420 16.535 200 7.874 75 2.953	—	IP68G	-40 to +70 °C	P.67

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The sensing range is specified for white, non-glossy paper.
 3) The fiber part is oil-resistant.
 4) The allowable cutting range is 500 mm 19.685 in from the end that is inserted to the amplifier.

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/

FX-301-F





Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

LIST OF FIBERS

Heat-resistant


Thru-beam type (one pair set)



Type	Heat-resistant temp.	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length : Free-cut	Sensing range (mm in) (Note 1)		Beam axis dia. (mm)	Ambient temp.	Dimensions	
						FX-500 series	U-LG LONG FAST H-SP				
Heat-resistant	350 °C	Lens mountable (FX-LE1/LE2/SV1) 	FT-H35-M2	R25	2 m	STD 430 16.929 HYPR 1,200 47.244	880 34.646 670 26.378 250 9.843 80 3.150	ø1.2	-60 to +350 °C	P.53	
		Sleeve 60 mm 	FT-H35-M2S6	Fiber R25 Sleeve R10							
	200 °C	Allows flexible wiring Lens mountable (FX-LE1/LE2/SV1) 	FT-H20W-M1	R10	1 m	STD 470 18.504 HYPR (Note2) 1,600 62.992	1,000 39.370 840 33.071 300 11.811 90 3.543	ø0.8	-60 to +200 °C		
		Lens mountable (FX-LE1/LE2/SV1) 	FT-H20-M1	R25		STD 540 21.260 HYPR (Note2) 1,600 62.992	1,300 51.181 960 37.795 330 12.992 110 4.331				ø1.2
	130 °C	Lens mountable (FX-LE2 only) 	FT-H13-FM2		2 m	 STD 700 27.559 HYPR 3,300 129.921	1,900 74.803 1,300 51.181 410 16.142 140 5.512	ø1.5	-60 to +130 °C		
Heat-resistant (joint)	200 °C	Lens mountable (FX-LE1/LE2/SV1) 	FT-H20-J20-S (Note 5)	Heat-resistant side R18 (Note 4)	 200 mm (Note 3)	STD 470 18.504 HYPR 1,600 62.992	1,000 39.370 790 31.102 300 11.811 90 3.543	ø1.2	-60 to +200 °C	P.53	
		 300 mm (Note 3)									
		 500 mm (Note 3)									
		Side-view 	FT-H20-VJ50-S (Note 5)		 800 mm (Note 3)	STD 600 23.622 HYPR 2,100 82.677	1,300 51.181 980 38.583 390 15.354 120 4.724				
			FT-H20-VJ80-S (Note 5)								

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.
 3) Fiber length (fixed-length) for heat-resistant fiber side. Fiber length for ordinary temperature side is 2 m 6.562 ft (free-cut).
 4) Bending durable fiber R4 mm R0.157 in or more for ordinary temperature side.
 5) Heat-resistant joint fibers and ordinary-temperature fibers (FT-42) are sold as a set.

Heat-resistant joint fiber set contents

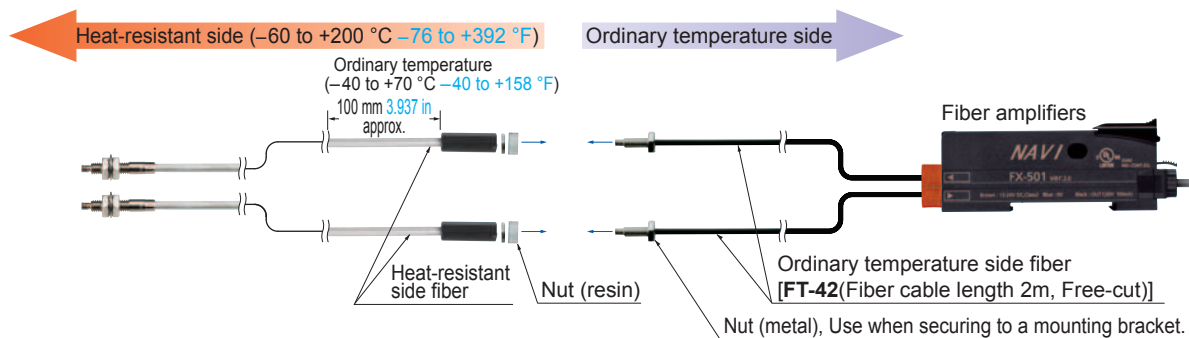

Model No. when ordering individually as spare parts

- Heat-resistant side fiber **one pair set**
FT-H20-J20, FT-H20-J30, FT-H20-J50, FT-H20-VJ50, FT-H20-VJ80
- Ordinary temperature side fiber **one pair set**
FT-42

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7 / FX-301-F

FIBER SENSORS

LIST OF FIBERS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS











MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Heat-resistant

Reflective type



Type		Heat-resistant temp.	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length ✂: Free-cut	Sensing range (mm in) (Note 1, 2)		Ambient temp.	Dimensions	
							FX-500 series	U-LG LONG FAST H-SP			
Heat-resistant	Threaded	350 °C		FD-H35-M2	R25	2 m	STD 260 10.236 HYPR 720 28.346	540 21.260 460 18.110 150 5.906 45 1.772	-60 to +350 °C	P.64	
			FD-H35-M2S6	Fiber R25 Sleeve R10							
			FD-H35-20S				STD 260 10.236 HYPR 840 33.071	550 21.654 440 17.323 140 5.512 45 1.772			
		200 °C		FD-H20-M1	R25	1 m	STD 330 12.992 HYPR 840 33.071	550 21.654 500 19.685 200 7.874 55 2.165	-60 to +200 °C	P.63	
			FD-H20-21	STD 230 9.055 HYPR 770 30.315			500 19.685 380 14.961 130 5.118 45 1.772				
		130 °C		FD-H13-FM2	✂ 2 m	STD 350 13.780 HYPR 880 34.646	640 25.197 600 23.622 200 7.874 65 2.559	-60 to +130 °C			
	Glass substrate detection convergent reflective	300 °C		FD-H30-L32	R25	2 m	STD 17 0.669 HYPR 40 1.575	30 1.181 25 0.984 12 0.472 1.5 to 6 0.059 to 0.236	-60 to +300 °C	P.64	
		250 °C		FD-H25-L43			3 m	STD 1.5 to 26 0.059 to 1.024 HYPR 1 to 31 0.039 to 1.220			1 to 30 0.039 to 1.181 1 to 28 0.039 to 1.102 1.5 to 24 0.059 to 0.945 2 to 18 0.079 to 0.709
			FD-H25-L45	STD 5 to 42 0.197 to 1.654 HYPR 4 to 43.5 0.157 to 1.713		4 to 43 0.157 to 1.693 4.5 to 43 0.177 to 1.693 5 to 40 0.197 to 1.575 6.5 to 34 0.256 to 1.339					
		180 °C		FD-H18-L31		✂ 2 m		STD 16 0.630 HYPR 60 2.362	32 1.260 24 0.945 13 0.512 2 to 6.5 0.079 to 0.256	-60 to +180 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range of reflective type is the value for white non-glossy paper (50 × 50 mm 1.969 × 1.969 in glass substrate for **FD-H30-L32** and **FD-H18-L31**, transparent glass 100 × 100 × t0.7 mm 3.937 × 3.937 × t0.028 in for **FD-H25-L43** and **FD-H25-L45**).

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/
FX-301-F

LIST OF FIBERS

Vacuum-resistant

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in)		Beam axis dia. (mm)	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP			
Vacuum-resistant Thru-beam	300 °C Lens mountable (FV-LE1/SV2) M4 	FT-H30-M1V-S (Note)	R18	1 m	STD 270 10.630 HYPR 1,000 39.370	590 23.228 470 18.504 160 6.299 55 2.165	ø1.2	-30 to +300 °C	P.53

Note: Sold as a set comprising vacuum type fiber + photo-terminal (FV-BR1) + fiber at atmospheric side (FT-J8).

Reflective type




Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in)(Note 2)		Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP		
Vacuum-resistant Reflective	300 °C, Rectangular head 	FD-H30-KZ1V-S (Note 1)	R18	1 m	STD 20 to 200 0.787 to 7.874 HYPR 5 to 500 0.197 to 19.685	10 to 340 0.394 to 13.386 15 to 270 0.591 to 10.630 20 to 120 0.787 to 4.724 20 to 45 0.787 to 1.772	-30 to +300 °C	P.64
Vacuum-resistant Convergent reflective	300 °C, Glass substrate detection 	FD-H30-L32V-S (Note 1)		3 m	STD 18 0.315 HYPR 18 0.709	12 0.472 10 0.394 5.5 0.217 1.5 to 3 0.059 to 0.118		

Notes: 1) Sold as a set comprising vacuum type fiber + photo-terminal (FV-BR1) + fiber at atmospheric side (FT-J8).


2) The sensing range of reflective type is the value for transparent glass 100 × 100 × t0.7 mm 3.937 × 3.937 × t0.028 in.

Vacuum-resistant fiber set contents

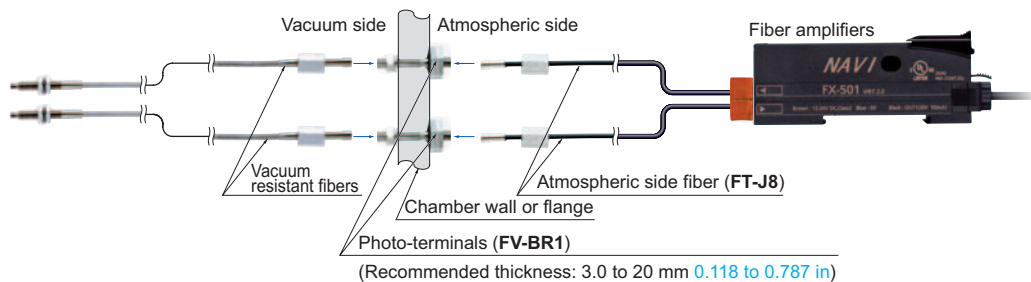

Model No. when ordering individually as spare parts

- Vacuum resistant fiber
FT-H30-M1V (one pair set)
FD-H30-KZ1V
FD-H30-L32V
- Photo-terminal
FV-BR1 (one pair set)
- Atmospheric side fiber
FT-J8 (one pair set)
- Mounting bracket for **FD-H30-KZ1V(-S)**
MS-FD-2



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F/ FX-301-F

LIST OF FIBERS

Liquid leak / Liquid detection

Reflective type / Thru-beam type

Type		Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length  : Free-cut	Description FX-500 series (STD mode)	Protection	Ambient temp.	Dimensions
Contact type	Liquid level sensing	Heat resistant 125 °C Fluorine resin coating ø6 	FD-F8Y	Protective tube R40 Fiber R15	 2 m (Note 1)	ø6 mm ø0.236 in Protective tube: Fluorine resin, length 1,000 mm 39.370 in (not cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received	IP68	-40 to +125 °C	P.62
		Heat resistant 105 °C Fluorine resin coating Metal-free ø4 	FD-HF40Y (Note 2)	Protective tube R20 Fiber R10	 2 m	ø4 mm ø0.157 in Protective tube: Fluorine resin, length 500 mm 19.685 in (cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received	IP68G	-40 to +105 °C	P.64
		Heat resistant 70 °C Fluorine resin coating throughout the fiber Metal-free ø4 	FD-F41Y (Note 2)			ø4 mm ø0.157 in Protective tube: Fluorine resin, length 500 mm 19.685 in (cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received		-40 to +70 °C	
	Liquid leak detection	SEMI S2 compliant W20 × H30 × D10 	Tough FD-F71	R4 Bending durability	 5 m	Liquid leak detection Leak absent: Beam received, Leak present: Beam interrupted Compatible amplifire: FX500 series only	IP67	-20 to +60 °C	
Pipe-mountable type	Liquid level sensing	Standard  W25 × H13 × D20	FD-F41	R10	 2 m	Applicable pipe diameter: Outer dia. ø6 to ø26 mm ø0.236 to ø1.024 in transparent pipe [PVC (vinyl chloride), fluorine resin, polycarbonate, acrylic, glass, wall thickness 1 to 3 mm 0.039 to 0.118 in] Liquid absent: Beam received, Liquid present: Beam not received	—	-40 to +100 °C	P.62
		For 1 mm thick PFA pipe  W25 × H13 × D20	FD-F4			Applicable pipe diameter: Outer dia. ø6 to ø26 mm ø0.236 to ø1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in] Liquid absent: Beam received, Liquid present: Beam not received			
	Liquid sensing	Mountable on pipe-array fiber  W6.5 × H28.3 × D17	Tough FD-FA93	R4 Bending durability	 2 m	Applicable pipe diameter: Outer dia. ø8 mm ø0.315 in or more transparent pipe (When used with the tying bands: ø8 to ø80 mm ø0.315 to ø3.150 in) [PFA (fluorine resin), including translucent] Liquid absent: Beam received, Liquid present: Beam not received	IP40	-40 to +70 °C	P.52
		SEMI S2 compliant  W23 × H20 × D17	Tough FT-F93	Protective tube R20 Fiber R2 Bending durability		Applicable pipe diameter: Outer dia. ø3 to ø10 mm ø0.118 to ø0.394 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 0.3 to 1 mm 0.012 to 0.039 in] Liquid absent: Beam not received, Liquid present: Beam received Compatible amplifire: FX500 series only		-40 to +60 °C	


Notes: 1) The allowable cutting range is 1,000 mm **39.370 in** from the end that the amplifier inserted.
2) Liquid inflow prevention joint, protective tube extension joint, fiber mounting joint is available.

Designation	Model No.	Description		
Liquid inflow prevention joint (Note)	MS-FX-01Y	Applicable fibers	FD-HF40Y FD-F41Y	This joint suppresses false operations due to liquid slip-in from the top of the protective tube.
Protective tube extension joint (Note)	MS-FX-02Y			The protective tube can be extended.
Fiber mounting joint (Note)	MS-FX-03Y			The joint is used for mounting fibers on a tank.

Note: The joint internal ferrule (**MS-FX-YF**) is available as a spare part. A distorted ferrule may result in leakage.


Liquid inflow prevention joint

• MS-FX-01Y




Protective tube extension joint

• MS-FX-02Y



Fiber mounting joint


• MS-FX-03Y



Accessories for additional supply


• MS-FD-F7-1

(SUS mounting bracket for **FD-F71**)



• MS-FD-F7-2

(PVC mounting bracket for **FD-F71**)




Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

LIST OF FIBERS

Model No. when ordering accessories additionally




- **RF-003** (Reflector for **FR-KZ50E/KZ50H**)
- **RF-13** (Reflective tape for **FR-Z50HW**)
- **FX-CT2** (Fiber cutter)
- **FX-CT3** (Fiber cutter for **FD-H40Y/F41Y**)
- **FX-AT2** (Attachment for fixed-length fiber, Orange)
- **FX-AT3** (Attachment for $\varnothing 2.2$ mm $\varnothing 0.087$ in fiber, Clear orange)
- **FX-AT4** (Attachment for $\varnothing 1$ mm $\varnothing 0.039$ in fiber, Black)
- **FX-AT5** (Attachment for $\varnothing 1.3$ mm $\varnothing 0.051$ in fiber, Gray)
- **FX-AT6** (Attachment for $\varnothing 1$ mm $\varnothing 0.039$ in / $\varnothing 1.3$ mm $\varnothing 0.051$ in mixed fiber, Black / Gray)
- **MS-FD-2** (Fiber mounting bracket)

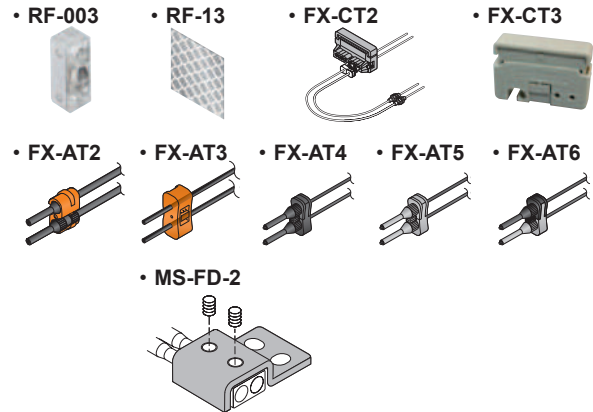

FIBER OPTIONS

Refer to p.69~ for details of lens dimensions.

Lens (For reflective type fiber)

Designation		Model No.	Description													
For reflective type fiber	Pinpoint spot lens	FX-MR1		Pinpoint spot of $\varnothing 0.5$ mm $\varnothing 0.020$ in. Enables detection of minute objects or small marks. • Distance to focal point: 6 ± 1 mm 0.236 ± 0.039 in • Applicable fibers: FD-42G, FD-42GW • Ambient temperature: -40 to $+70$ °C -40 to $+158$ °F (Note)												
	Zoom lens	FX-MR2		The spot diameter is adjustable from $\varnothing 0.7$ to $\varnothing 2$ mm $\varnothing 0.028$ to $\varnothing 0.079$ in according to how much the fiber is screwed in. • Applicable fibers: FD-42G, FD-42GW • Ambient temperature: -40 to $+70$ °C -40 to $+158$ °F (Note) • Accessory: MS-EX3 (mounting bracket) Sensing range for FX-500 series <table><tr><th>Screw-in depth</th><th>Distance to focal point</th><th>Spot diameter</th></tr><tr><td>7 mm</td><td>18.5 mm approx.</td><td>$\varnothing 0.7$ mm</td></tr><tr><td>12 mm</td><td>27 mm approx.</td><td>$\varnothing 1.2$ mm</td></tr><tr><td>14 mm</td><td>43 mm approx.</td><td>$\varnothing 2.0$ mm</td></tr></table>	Screw-in depth	Distance to focal point	Spot diameter	7 mm	18.5 mm approx.	$\varnothing 0.7$ mm	12 mm	27 mm approx.	$\varnothing 1.2$ mm	14 mm	43 mm approx.	$\varnothing 2.0$ mm
	Screw-in depth	Distance to focal point	Spot diameter													
	7 mm	18.5 mm approx.	$\varnothing 0.7$ mm													
	12 mm	27 mm approx.	$\varnothing 1.2$ mm													
14 mm	43 mm approx.	$\varnothing 2.0$ mm														
Finest spot lens	FX-MR3		Extremely fine spot of $\varnothing 0.15$ mm $\varnothing 0.006$ in approx. achieved. • Applicable fibers: FD-EG31, FD-EG30, FD-42G, FD-42GW, FD-32G, FD-32GX • Ambient temperature: -40 to $+70$ °C -40 to $+158$ °F (Note) Sensing range for FX-500 series <table><tr><th>Fiber model No.</th><th>Distance to focal point</th><th>Spot diameter</th></tr><tr><td>FD-EG31</td><td>7.5 ± 0.5 mm</td><td>$\varnothing 0.15$ mm approx.</td></tr><tr><td>FD-EG30</td><td>7.5 ± 0.5 mm</td><td>$\varnothing 0.3$ mm approx.</td></tr><tr><td>FD-42G/42GW FD-32G/32GX</td><td>7.5 ± 0.5 mm</td><td>$\varnothing 0.5$ mm approx.</td></tr></table>	Fiber model No.	Distance to focal point	Spot diameter	FD-EG31	7.5 ± 0.5 mm	$\varnothing 0.15$ mm approx.	FD-EG30	7.5 ± 0.5 mm	$\varnothing 0.3$ mm approx.	FD-42G/42GW FD-32G/32GX	7.5 ± 0.5 mm	$\varnothing 0.5$ mm approx.	
Fiber model No.	Distance to focal point		Spot diameter													
FD-EG31	7.5 ± 0.5 mm	$\varnothing 0.15$ mm approx.														
FD-EG30	7.5 ± 0.5 mm	$\varnothing 0.3$ mm approx.														
FD-42G/42GW FD-32G/32GX	7.5 ± 0.5 mm	$\varnothing 0.5$ mm approx.														
Finest spot lens	FX-MR6	Extremely fine spot of $\varnothing 0.1$ mm $\varnothing 0.004$ in approx. achieved. • Applicable fibers: FD-EG31, FD-EG30, FD-42G, FD-42GW, FD-32G, FD-32GX • Ambient temperature: -20 to $+60$ °C -4 to $+140$ °F (Note) Sensing range for FX-500 series <table><tr><th>Fiber model No.</th><th>Distance to focal point</th><th>Spot diameter</th></tr><tr><td>FD-EG31</td><td>7 ± 0.5 mm</td><td>$\varnothing 0.1$ mm approx.</td></tr><tr><td>FD-EG30</td><td>7 ± 0.5 mm</td><td>$\varnothing 0.2$ mm approx.</td></tr><tr><td>FD-42G/42GW FD-32G/32GX</td><td>7 ± 0.5 mm</td><td>$\varnothing 0.4$ mm approx.</td></tr></table>	Fiber model No.	Distance to focal point	Spot diameter	FD-EG31	7 ± 0.5 mm	$\varnothing 0.1$ mm approx.	FD-EG30	7 ± 0.5 mm	$\varnothing 0.2$ mm approx.	FD-42G/42GW FD-32G/32GX	7 ± 0.5 mm	$\varnothing 0.4$ mm approx.		
Fiber model No.	Distance to focal point	Spot diameter														
FD-EG31	7 ± 0.5 mm	$\varnothing 0.1$ mm approx.														
FD-EG30	7 ± 0.5 mm	$\varnothing 0.2$ mm approx.														
FD-42G/42GW FD-32G/32GX	7 ± 0.5 mm	$\varnothing 0.4$ mm approx.														
Zoom lens (side-view type)	FX-MR5		FX-MR2 is converted into a side-view type and can be mounted in a very small space. • Applicable fibers: FD-42G, FD-42GW • Ambient temperature: -40 to $+70$ °C -40 to $+158$ °F (Note) Sensing range for FX-500 series <table><tr><th>Screw-in depth</th><th>Distance to focal point</th><th>Spot diameter</th></tr><tr><td>8 mm</td><td>13 mm approx.</td><td>$\varnothing 0.5$ mm</td></tr><tr><td>10 mm</td><td>15 mm approx.</td><td>$\varnothing 0.8$ mm</td></tr><tr><td>14 mm</td><td>30 mm approx.</td><td>$\varnothing 3.0$ mm</td></tr></table>	Screw-in depth	Distance to focal point	Spot diameter	8 mm	13 mm approx.	$\varnothing 0.5$ mm	10 mm	15 mm approx.	$\varnothing 0.8$ mm	14 mm	30 mm approx.	$\varnothing 3.0$ mm	
Screw-in depth	Distance to focal point	Spot diameter														
8 mm	13 mm approx.	$\varnothing 0.5$ mm														
10 mm	15 mm approx.	$\varnothing 0.8$ mm														
14 mm	30 mm approx.	$\varnothing 3.0$ mm														

Note: Refer to p.80 or p.85 for the ambient temperature of fibers to be used in combination.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410


FX-311


FX-301-F7 / FX-301-F

FIBER OPTIONS

Refer to p.69~ for details of lens dimensions.

Lens (For square head M3 reflective fiber)

Type		Spot diameter (mm in)(Note)	Distance to focal point (mm in)(Note)	Lens		Fiber					
				Shape (mm in)	Model No.	Shape	Emitting fiber core (mm in)	Model No.			
For Square head M3 reflective fiber	Finest spot lens	ø0.1 ø0.004 approx.	7 ± 0.5 0.276 ± 0.020		FX-MR7		ø0.125 ø0.005	FD-R33EG			
						ø0.125 ø0.005	FD-EG31				
		ø0.2 ø0.008 approx.					ø0.175 ø0.007	FD-R34EG			
							ø0.25 ø0.010	FD-R32EG			
		ø0.4 ø0.016 approx.					ø0.25 ø0.010	FD-EG30			
							ø0.5 ø0.020	FD-R31G			
							ø0.5 ø0.020	FD-32G			
							ø0.5 ø0.020	FD-32GX			
							ø0.5 ø0.020	FD-42G			
							ø0.5 ø0.020	FD-42GW			




Type		Spot diameter (mm in)(Note)	Sensing range (mm in)(Note)	Lens		Emitting fiber core (mm in)	Applicable fibers	
				Shape (mm in)	Model No.		Model No.	
For Square head M3 reflective fiber	Zoom lens	ø0.4 to ø2.0 ø0.016 to ø0.079 approx.	10 to 30 0.394 to 1.181		FX-MR8	ø0.125 ø0.005	FD-R33EG, FD-EG31	
		ø0.4 to ø2.2 ø0.016 to ø0.087 approx.				ø0.175 ø0.007	FD-R34EG	
		ø0.5 to ø2.5 ø0.020 to ø0.098 approx.				ø0.25 ø0.010	FD-R32EG, FD-EG30	
		ø0.8 to ø3.5 ø0.031 to ø0.138 approx.				ø0.5 ø0.020	FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW	
	Parallel light lens	ø4.0 ø0.157 approx.	0 to 30 0 to 1.181		FX-MR9	ø0.125 ø0.005	FD-R33EG, FD-EG31	
						ø0.175 ø0.007	FD-R34EG	
						ø0.25 ø0.010	FD-R32EG, FD-EG30	
						ø0.5 ø0.020	FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW	

Note: Spot diameter, distance to focal point and sensing range are specified for FX-500 series.

FIBER OPTIONS

Refer to p.69~ for details of lens dimensions.

Lens (For thru-beam type fiber)

Designation	Model No.	Description																																																																													
Expansion lens (Note 1)	FX-LE1		Increases the sensing range by 5 times or more. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø3.6 mm ø0.142 in	Sensing range (mm in) [Lens on both sides]																																																																											
				<table><tr><th>Fiber \ Mode</th><th>HYPR</th><th>U-LG</th><th>LONG</th><th>STD</th><th>FAST</th><th>H-SP</th></tr><tr><td>FT-43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,600 62.992</td></tr><tr><td>FT-42 FT-42W</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>2,200 86.614</td></tr><tr><td>FT-45X</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,500 59.055</td></tr><tr><td>FT-R40</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,900 74.803</td></tr><tr><td>FT-R43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,900 74.803</td><td>670 26.378</td></tr><tr><td>FT-H35-M2</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,300 129.921</td><td>1,400 55.118</td></tr><tr><td>FT-H20W-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>850 33.465</td></tr><tr><td>FT-H20-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,200 47.244</td></tr><tr><td>FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,500 137.795</td><td>2,000 78.740</td><td>1,600 62.992</td><td>500 19.685</td></tr></table>	Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP	FT-43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,600 62.992	FT-42 FT-42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,200 86.614	FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,500 59.055	FT-R40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	670 26.378	FT-H35-M2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,300 129.921	1,400 55.118	FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	850 33.465	FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,200 47.244	FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,500 137.795	2,000 78.740	1,600 62.992	500 19.685					
				Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																					
				FT-43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,600 62.992																																																																					
				FT-42 FT-42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,200 86.614																																																																					
				FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,500 59.055																																																																					
				FT-R40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803																																																																					
				FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	670 26.378																																																																					
				FT-H35-M2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,300 129.921	1,400 55.118																																																																					
				FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	850 33.465																																																																					
FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,200 47.244																																																																									
FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,500 137.795	2,000 78.740	1,600 62.992	500 19.685																																																																									
Super-expansion lens (Note 1)	FX-LE2		Tremendously increases the sensing range with large diameter lenses. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø9.8 mm ø0.386 in	Sensing range (mm in) [Lens on both sides]																																																																											
				<table><tr><th>Fiber \ Mode</th><th>HYPR</th><th>U-LG</th><th>LONG</th><th>STD</th><th>FAST</th><th>H-SP</th></tr><tr><td>FT-43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr><tr><td>FT-42 FT-42W</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr><tr><td>FT-45X</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td></tr><tr><td>FT-R40</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr><tr><td>FT-R43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr><tr><td>FT-H35-M2</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr><tr><td>FT-H20W-M1 FT-H20-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td></tr><tr><td>FT-H13-FM2</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr><tr><td>FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr></table>	Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP	FT-43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	FT-42 FT-42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	FT-R40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	FT-H35-M2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	FT-H20W-M1 FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	FT-H13-FM2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)					
				Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																					
				FT-43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																					
				FT-42 FT-42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																					
				FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)																																																																					
				FT-R40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																					
				FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																					
				FT-H35-M2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																					
				FT-H20W-M1 FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)																																																																					
FT-H13-FM2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																									
FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																									
Side-view lens	FX-SV1		Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 4) • Beam dia: ø2.8 mm ø0.110 in	Sensing range (mm in) [Lens on both sides]																																																																											
				<table><tr><th>Fiber \ Mode</th><th>HYPR</th><th>U-LG</th><th>LONG</th><th>STD</th><th>FAST</th><th>H-SP</th></tr><tr><td>FT-43</td><td>3,600 141.732 (Note 2)</td><td>3,400 133.858</td><td>2,600 102.362</td><td>1,700 66.929</td><td>970 38.189</td><td>310 12.205</td></tr><tr><td>FT-42</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>2,100 82.677</td><td>1,150 45.276</td><td>370 14.567</td></tr><tr><td>FT-42W</td><td>3,600 141.732 (Note 2)</td><td>3,500 137.795</td><td>2,700 106.299</td><td>1,800 70.866</td><td>990 38.976</td><td>320 12.598</td></tr><tr><td>FT-45X</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,400 55.118</td><td>800 31.496</td><td>210 8.268</td></tr><tr><td>FT-R43</td><td>3,200 125.984</td><td>1,800 70.866</td><td>1,300 51.181</td><td>950 37.402</td><td>510 20.079</td><td>160 6.299</td></tr><tr><td>FT-H35-M2</td><td>3,500 137.795</td><td>1,600 62.992</td><td>1,200 47.244</td><td>780 30.709</td><td>500 19.685</td><td>150 5.906</td></tr><tr><td>FT-H20W-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,500 59.055</td><td>950 37.402</td><td>560 22.047</td><td>190 7.480</td></tr><tr><td>FT-H20-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,300 51.181</td><td>780 30.709</td><td>500 19.685</td><td>150 5.906</td></tr><tr><td>FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S</td><td>1,600 62.992 (Note 2)</td><td>960 37.795</td><td>740 29.134</td><td>450 17.717</td><td>290 11.417</td><td>80 3.150</td></tr></table>	Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP	FT-43	3,600 141.732 (Note 2)	3,400 133.858	2,600 102.362	1,700 66.929	970 38.189	310 12.205	FT-42	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,100 82.677	1,150 45.276	370 14.567	FT-42W	3,600 141.732 (Note 2)	3,500 137.795	2,700 106.299	1,800 70.866	990 38.976	320 12.598	FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,400 55.118	800 31.496	210 8.268	FT-R43	3,200 125.984	1,800 70.866	1,300 51.181	950 37.402	510 20.079	160 6.299	FT-H35-M2	3,500 137.795	1,600 62.992	1,200 47.244	780 30.709	500 19.685	150 5.906	FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,500 59.055	950 37.402	560 22.047	190 7.480	FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,300 51.181	780 30.709	500 19.685	150 5.906	FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	1,600 62.992 (Note 2)	960 37.795	740 29.134	450 17.717	290 11.417	80 3.150					
				Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																					
				FT-43	3,600 141.732 (Note 2)	3,400 133.858	2,600 102.362	1,700 66.929	970 38.189	310 12.205																																																																					
				FT-42	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,100 82.677	1,150 45.276	370 14.567																																																																					
				FT-42W	3,600 141.732 (Note 2)	3,500 137.795	2,700 106.299	1,800 70.866	990 38.976	320 12.598																																																																					
				FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,400 55.118	800 31.496	210 8.268																																																																					
				FT-R43	3,200 125.984	1,800 70.866	1,300 51.181	950 37.402	510 20.079	160 6.299																																																																					
				FT-H35-M2	3,500 137.795	1,600 62.992	1,200 47.244	780 30.709	500 19.685	150 5.906																																																																					
				FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,500 59.055	950 37.402	560 22.047	190 7.480																																																																					
FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,300 51.181	780 30.709	500 19.685	150 5.906																																																																									
FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	1,600 62.992 (Note 2)	960 37.795	740 29.134	450 17.717	290 11.417	80 3.150																																																																									
Expansion lens for vacuum fiber (Note 1)	FV-LE1		Sensing range increases by 4 times or more. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø3.6 mm ø0.142 in	Sensing range (mm in) [Lens on both sides] (Note 3)																																																																											
								<table><tr><th>Fiber \ Mode</th><th>HYPR</th><th>U-LG</th><th>LONG</th><th>STD</th><th>FAST</th><th>H-SP</th></tr><tr><td>FT-H30-M1V-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,400 133.858</td><td>1,500 59.055</td><td>900 35.433</td><td>370 14.567</td></tr></table>	Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP	FT-H30-M1V-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,400 133.858	1,500 59.055	900 35.433	370 14.567																																																									
Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																									
FT-H30-M1V-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,400 133.858	1,500 59.055	900 35.433	370 14.567																																																																									
Vacuum-resistant side-view lens (Note 1)	FV-SV2		Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 4) • Beam dia: ø3.7 mm ø0.146 in	Sensing range (mm in) [Lens on both sides] (Note 3)																																																																											
								<table><tr><th>Fiber \ Mode</th><th>HYPR</th><th>U-LG</th><th>LONG</th><th>STD</th><th>FAST</th><th>H-SP</th></tr><tr><td>FT-H30-M1V-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,400 133.858</td><td>1,500 59.055</td><td>900 35.433</td><td>370 14.567</td></tr></table>	Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP	FT-H30-M1V-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,400 133.858	1,500 59.055	900 35.433	370 14.567																																																									
Fiber \ Mode	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																									
FT-H30-M1V-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,400 133.858	1,500 59.055	900 35.433	370 14.567																																																																									

- Notes: 1) Be careful sure to use it only after you have adjusted it sufficiently when installing the thru-beam type fiber equipped with the expansion lens, as the beam envelope becomes narrow and alignment is difficult.
2) The fiber cable length practically limits the sensing range.
3) The fiber cable length for the **FT-H30-M1V-S** is 1 m 3.28 ft. The sensing ranges in HYPR, U-LG and LONG of **FX-500** series are specified considering the length of the **FT-J8** atmospheric side fiber.
4) Refer to p.79, p.81, p.92, and p.94 for the ambient temperature of fibers to be used in combination.

FIBER OPTIONS


Others

Designation	Model No.	Description				
Protective tube for thru-beam type fiber	FTP-500 (0.5 m 1.640 ft)	For M4 thread	Applicable fibers	FT-42 FT-42S FT-42W	FT-43 FT-H13-FM2	The protective tube, made of non-corrosive stainless steel, protects the inner fiber cable from any external forces.
	FTP-1000 (1 m 3.281 ft)					
	FTP-1500 (1.5 m 4.921 ft)					
	FTP-N500 (0.5 m 1.640 ft)	For M3 thread		FT-31 FT-31S FT-31W	FD-31 FD-31W	
	FTP-N1000 (1 m 3.281 ft)					
	FTP-N1500 (1.5 m 4.921 ft)					
Protective tube for reflective type fiber	FDP-500 (0.5 m 1.640 ft)	For M6 thread		FD-61 FD-61G FD-61S FD-61W	FD-62 FD-H13-FM2	
	FDP-1000 (1 m 3.281 ft)					
	FDP-1500 (1.5 m 4.921 ft)					
	FDP-N500 (0.5 m 1.640 ft)	For M4 thread		FD-41 FD-41W	FD-41S FD-41SW	
	FDP-N1000 (1 m 3.281 ft)					
	FDP-N1500 (1.5 m 4.921 ft)					
Fiber bender	FB-1	The fiber bender bends the sleeve part of the fiber head at the proper radius. (Note 1)				
Universal sensor mounting stand (Note 2)	MS-AJ1-F	Horizontal mounting type		Mounting stand assembly for fiber (For M3, M4 or M6 threaded head fiber)		
	MS-AJ2-F	Vertical mounting type				
Liquid inflow prevention joint (Note 2)	MS-FX-01Y	Applicable fibers	FD-HF40Y FD-F41Y	This joint suppresses false operations due to liquid slip-in from the top of the protective tube.		
Protective tube extension joint (Note 2)	MS-FX-02Y			The protective tube can be extended.		
Fiber mounting joint (Note 2)	MS-FX-03Y			The joint is used for mounting fibers on a tank.		
Single core holder	FX-AT15A	The incident light intensity may vary when using a multi-core fiber or a thin type sharp bending fiber. This holder suppresses the variation in the incident light intensity. (Brown)				
Reflector	RF-210	Used with FR-Z50HW. Refer to p.90 for the sensing range when FR-Z50HW is used in combination with a reflector.				
	RF-220					
	RF-230					

Notes: 1) Do not bend the sleeve part of any side-view type fiber or ultra-small diameter head type fiber.
2) The joint internal ferrule (**MS-FX-YF**) is available as a spare part. A distorted ferrule may result in leakage.


Protective tube

- FTP-□
- FDP-□



Fiber bender


- FB-1




Universal sensor mounting stand

Using the arm which enables adjustment in the horizontal direction, sensing can also be done from above an assembly line.

- MS-AJ1-F



- MS-AJ2-F




Single core holder

- FX-AT15A




Liquid inflow prevention joint

- MS-FX-01Y




Protective tube extension joint

- MS-FX-02Y




Fiber mounting joint

- MS-FX-03Y




Reflector


- RF-210



- RF-220



- RF-230



SPECIFICATIONS

Item	Model No.	Type	Standard type	2-output type	Cable type (Analog output type)	
		NPN output	FX-501	FX-502	FX-505-C2	
		PNP output	FX-501P	FX-502P	FX-505P-C2	
Supply voltage			12 to 24 V DC ⁺¹⁰ ₋₁₅ % Ripple P-P 10 % or less			
Power consumption			Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage, excluding analog output of cable type) ECO mode: 680 mW or less (current consumption 28 mA or less at 24 V supply voltage, excluding analog output of cable type)			
Output (2-output type and cable type: Output 1, Output 2)			<NPN output type> NPN open-collector transistor • Maximum sink current: 100 mA (2-output type and cable type are 50 mA) (Note 2) • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (Note 3) (at maximum sink current)			<PNP output type> PNP open-collector transistor • Maximum source current: 100 mA (2-output type and cable type are 50 mA) (Note 2) • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (Note 3) (at maximum source current)
			Output points		1 point	2 points
			Output operation		Switchable either Light-ON or Dark-ON by L/D mode	
			Short-circuit protection		Incorporated	
Response time			H-SP: 25 μs or less, FAST: 60 μs or less, STD: 250 μs or less, LONG: 2 ms or less, U-LG: 4 ms or less, HYPR: 24 ms or less, selectable			
Analog output (Cable type only)			Output current: 4 to 20 mA approx. [H-SP, FAST, STD: At 0 to 4,000 digits, LONG: At 0 to 8,000 digits (Note 4)], Response time: 2 ms or less, Zero point: Within 4 mA ±1 % F.S., Span: Within 16 mA ±5 % F.S., Linearity: Within ±3 % F.S., Load resistance: 0 to 250 Ω			
External input (2-output type only, switchable with Output 2)			————	<NPN output type> NPN non-contact input • Signal condition High: +8 V to +V DC or Open Low: 0 to +1.2 V DC (at 0.5 mA source current) • Input impedance: 10 kΩ approx.	<PNP output type> PNP non-contact input • Signal condition High: +4 V to +V DC (at 3 mA sink current) Low: 0 to +0.6 V DC or Open • Input impedance: 10 kΩ approx.	
Possible external input function			————	Emission halt / Teaching (Full-auto, Limit, 2-point) / Logic operation setting / Copy lock / Display adjustment / Data bank load / Data bank save, selectable		
Sensitivity setting			2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment			
Incident light intensity display range			H-SP / FAST / STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999			
Timer function			Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective	<Output 1> Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective		
				<Output 2> Incorporated with variable OFF-delay / ON-delay / One-shot timer, switchable either effective or ineffective		
Timer period			Timer range "ms": 0.5 ms approx., 1 to 9,999 ms approx., 1 ms approx., Timer range "sec.": 0.5 s approx., 1 to 32 s approx., 1 s approx., Timer range "1/10 ms": 0.05 ms approx., 0.1 to 999.9 ms approx., 0.1 ms approx., each output is set individually			
Light emitting amount selection function			Incorporated, 3 levels (each level 25 to 100 %) + Auto setting [1 level (25 to 100 %) when using H-SP mode]			
Interference prevention function			Incorporated (Note 5), selectable either automatic interference prevention or different frequency			
Various settings			Hysteresis setting / Shift amount setting / Emission power setting / Display turning setting / ECO setting / Data bank loading saving setting / Copying setting / Code setting / Reset setting / Logical calculation setting / Threshold tracking setting, etc.			
Protection			IP40 (IEC)			
Ambient temperature			-10 to +55 °C +14 to +131 °F [If 4 to 7 units are mounted in cascade: -10 to +50 °C +14 to +122 °F or if 8 to 16 units (cable type: 8 to 12 units) are mounted in cascade: -10 to +45 °C +14 to +113 °F] (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F			
Emitting element (modulated)			Red LED (Peak emission wavelength: 643 nm 0.025 mil)			
Material			Enclosure, Case cover: Polycarbonate, Switch: TPEE			
Cable			————	0.2 mm ² 6-core cabtyre cable, 2 m 6.562 ft long		
Cable extension			————	Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable. (however, supply voltage 12 V DC)		
Weight			Net weight: 15 g approx., Gross weight: 70 g approx.		Net weight: 60 g approx., Gross weight: 100 g approx.	
Accessory			FX-MB1 (Amplifier protection seal): 1 set			

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C +73.4 °F.

2) 50 mA max. if 5 or more standard types are connected together. (25 mA in case of 2-output type and cable type)

3) In case of using the quick-connection cable (cable length 5 m 16.404 ft) (optional).

4) If display adjustment was conducted, it is not in this range.

5) Number of sensor heads which is possible to be mounted closely in auto interference prevention function depends on response time as shown in table below.
Number of sensor heads which is possible to be mounted closely in different frequency Interference prevention function is up to 3 units.

• Number of sensor heads mountable closely (Unit: set)

Response time	H-SP	FAST	STD	LONG	U-LG	HYPR
IP-1	0	2	4	8	8	12

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300


FX-410

FX-311


FX-301-F7 / FX-301-F

I/O CIRCUIT AND WIRING DIAGRAMS**FX-501**


NPN output type

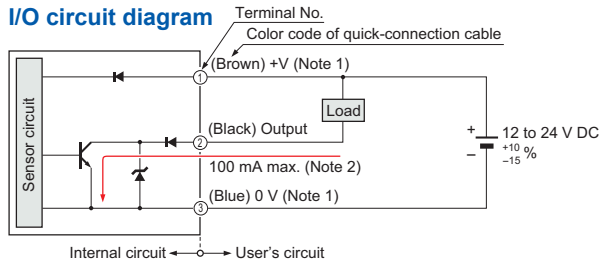I/O circuit diagram


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 50 mA max., if five amplifiers or more, are connected together.

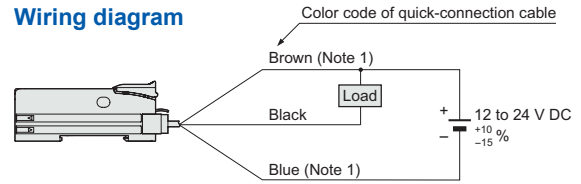Wiring diagram


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

Terminal arrangement diagram**FX-501P**


PNP output type

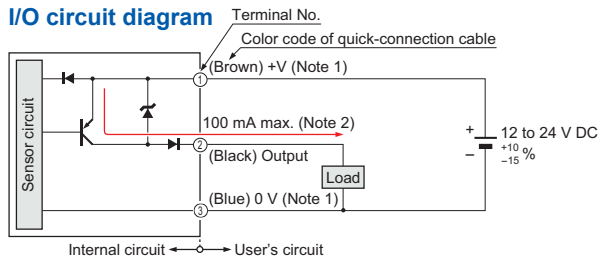I/O circuit diagram


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 50 mA max., if five amplifiers or more, are connected together.

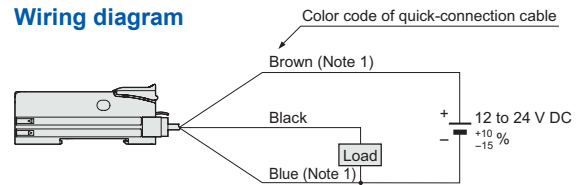Wiring diagram


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

Terminal arrangement diagram**FX-502**


NPN output type

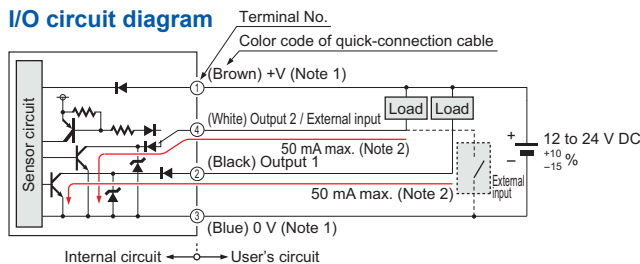I/O circuit diagram


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 25 mA max., if five amplifiers or more, are connected together.

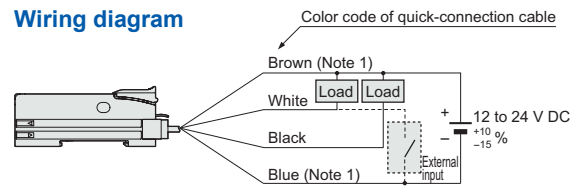Wiring diagram


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

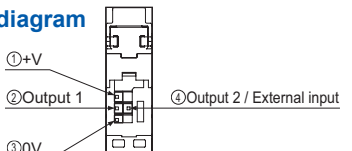Terminal arrangement diagram**FX-502P**


PNP output type

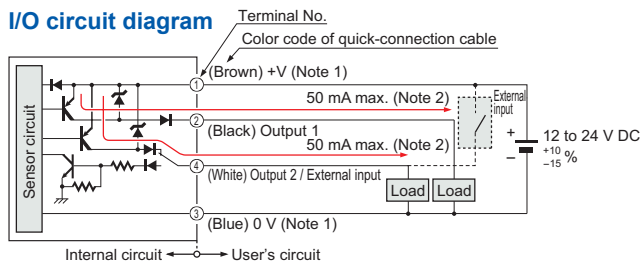I/O circuit diagram

Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 25 mA max., if five amplifiers or more, are connected together.

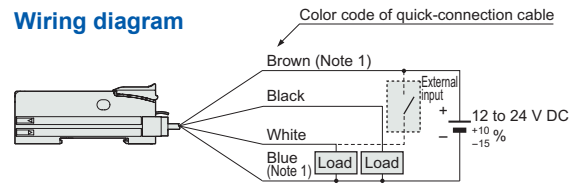Wiring diagram

Note: The quick-connection sub cable does not have a brown and a blue lead wire.

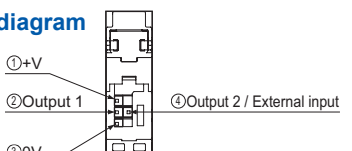
Terminal arrangement diagram

I/O CIRCUIT AND WIRING DIAGRAMS


FX-505-C2

NPN output type

I/O circuit diagram

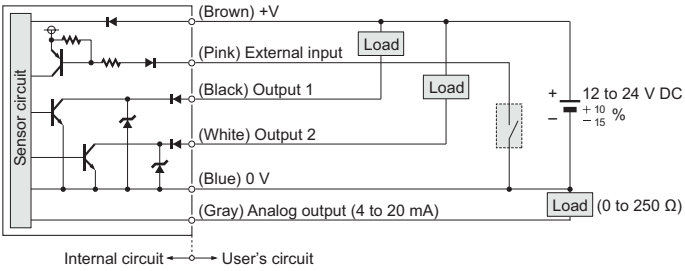


Wiring diagram

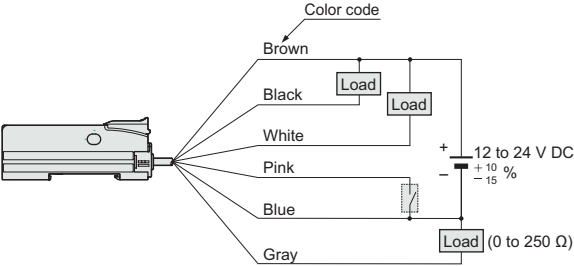


FX-505P-C2

PNP output type

I/O circuit diagram

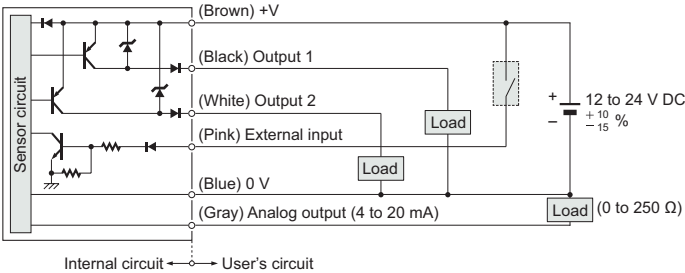

Wiring diagram

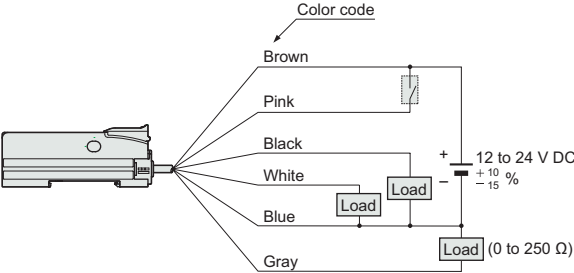

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311


FX-301-F7/
FX-301-F

SENSING CHARACTERISTICS (TYPICAL)


Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of Model No.

FT-140


Thru-beam type

**FT-30**


Thru-beam type

**FT-31**


Thru-beam type

**FT-31S**


Thru-beam type

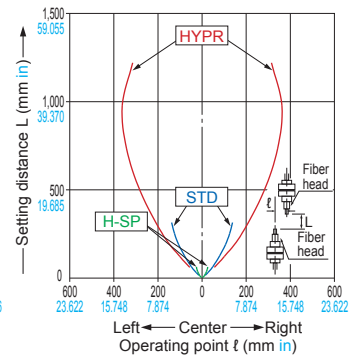**FT-31W**


Thru-beam type

**FT-40**


Thru-beam type

**FT-42**


Thru-beam type

**FT-42S**


Thru-beam type

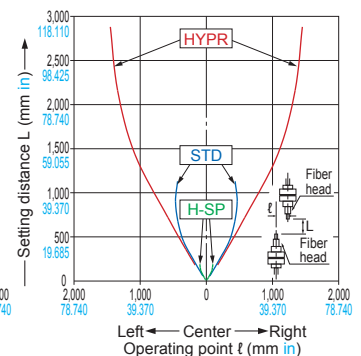**FT-42W**


Thru-beam type

**FT-43**

Thru-beam type


**FT-45X**

Thru-beam type


**FT-A11**

Thru-beam type


Horizontal direction




Vertical direction



Horizontal direction



Vertical direction

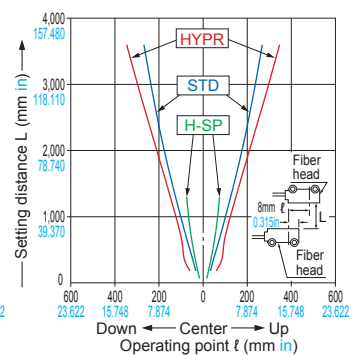


SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of Model No. (Models with same sensing characteristics are grouped together.)


FT-A32

Thru-beam type

Horizontal direction




Vertical direction


**FT-A32W**

Thru-beam type

Horizontal direction




Vertical direction


**FT-AL05**

Thru-beam type

Horizontal direction




Vertical direction

**FT-E13**


Thru-beam type

Horizontal direction


**FT-E23**

Thru-beam type


Horizontal direction

**FT-H13-FM2**


Thru-beam type

**FT-H20-J20-S FT-H20-J30-S FT-H20-J50-S**

Thru-beam type


**FT-H20-M1**

Thru-beam type


**FT-H20-VJ50-S FT-H20-VJ80-S**

Thru-beam type


Horizontal direction




Vertical direction

**FT-H20W-M1**

Thru-beam type

**FT-H30-M1V-S**

Thru-beam type

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
FLOW
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-
SAVING
UNITSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC




HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
Guide

Fibers

Fiber
Amplifiers**FX-500****FX-100****FX-300****FX-410****FX-311****FX-301-F7/****FX-301-F**


SENSING CHARACTERISTICS (TYPICAL)**Thru-beam type Parallel deviation**

Sensing characteristics are listed in the alphabetic order of Model No. (Models with same sensing characteristics are grouped together.)


FT-H35-M2
FT-H35-M2S6 Thru-beam type**FT-HL80Y** Thru-beam type**FT-KS40** Thru-beam type**FT-KV26**

Thru-beam type

Horizontal direction




Vertical direction


**FT-KV40**

Thru-beam type

Horizontal direction




Vertical direction

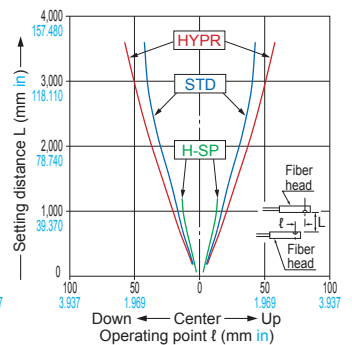
**FT-KV40W**

Thru-beam type


Horizontal direction




Vertical direction

**FT-L80Y**

Thru-beam type


**FT-R40**

Thru-beam type

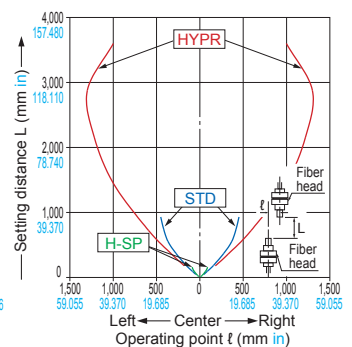
**FT-R41W**

Thru-beam type

Horizontal direction




Vertical direction


**FT-R42W**

Thru-beam type

Horizontal direction




Vertical direction

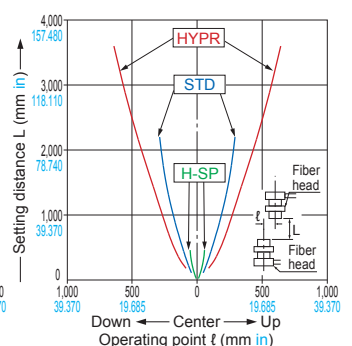


SENSING CHARACTERISTICS (TYPICAL)**Thru-beam type Parallel deviation** Sensing characteristics are listed in the alphabetic order of Model No.**FT-R44Y**

Thru-beam type

Horizontal direction




Vertical direction


**FT-R60Y**

Thru-beam type


Horizontal direction




Vertical direction

**FT-S11**


Thru-beam type

**FT-S20**


Thru-beam type

**FT-S21**


Thru-beam type

**FT-S21W**


Thru-beam type

**FT-S30**


Thru-beam type

**FT-S31W**

Thru-beam type


**FT-S32**

Thru-beam type


**FT-V23**

Thru-beam type

Horizontal direction



Vertical direction




Ramco National


FT-V24W

Thru-beam type

Horizontal direction



Vertical direction



www.panasonic-sensors.com

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
Guide

Fibers

Fiber
Amplifiers**FX-500****FX-100****FX-300****FX-410****FX-311****FX-301-F7I****FX-301-F**


SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of Model No.


FT-V25

Thru-beam type

Horizontal direction




Vertical direction


**FT-V30**

Thru-beam type

Horizontal direction




Vertical direction


**FT-V40**

Thru-beam type

Horizontal direction




Vertical direction


**FT-V80Y**

Thru-beam type

Horizontal direction



Vertical direction


**FT-Z20HBW**

Thru-beam type


FT-Z20W

Thru-beam type


Horizontal direction



Vertical direction




Vertical direction


**FT-Z30**

Thru-beam type

Horizontal direction




Vertical direction


**FT-Z30E**

Thru-beam type

Horizontal direction




Vertical direction




SENSING CHARACTERISTICS (TYPICAL)**Thru-beam type Parallel deviation** Sensing characteristics are listed in the alphabetic order of Model No.**FT-Z30EW**

Thru-beam type

Horizontal direction




Vertical direction


**FT-Z30H**

Thru-beam type

Horizontal direction




Vertical direction


**FT-Z30HW**

Thru-beam type

Horizontal direction




Vertical direction


**FT-Z30W**

Thru-beam type

Horizontal direction




Vertical direction


**FT-Z40W**

Thru-beam type

Horizontal direction




Vertical direction

**FT-Z40BW**


Thru-beam type

Horizontal direction

**FT-Z802Y**


Thru-beam type

Vertical direction


**Retroreflective type Parallel deviation** Sensing characteristics are listed in the alphabetic order of the Model No.**FR-KZ22E**

Retroreflective type

Horizontal direction




Vertical direction


**FR-KZ50E**

Retroreflective type

Horizontal direction



Vertical direction



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311


FX-301-F7

FX-301-F


SENSING CHARACTERISTICS (TYPICAL)**Retroreflective type Parallel deviation** Sensing characteristics are listed in the alphabetic order of the Model No.**FR-KZ50H**

Retroreflective type

Horizontal direction




Vertical direction

**FR-Z50HW**


Retroreflective type

With Reflective tape RF-13 (attached)

Horizontal direction




Vertical direction




With reflector RF-230 (optional)

Horizontal direction




Vertical direction


**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.**FD-30**

Reflective type

Horizontal direction




Vertical direction


**FD-31**

Reflective type

Horizontal direction




Vertical direction


**FD-31W**

Reflective type

Horizontal direction




Vertical direction

**FD-32G**


Reflective type

Horizontal direction




Vertical direction




SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.**FD-32GX** Reflective type**FD-40**

Horizontal direction




Vertical direction


**FD-41**

Reflective type

Horizontal direction




Vertical direction


**FD-41S**

Reflective type

Horizontal direction




Vertical direction


**FD-41SW**

Reflective type

Horizontal direction




Vertical direction


**FD-41W**

Reflective type


Horizontal direction




Vertical direction

**FD-42G**

Reflective type


**FD-42GW**

Reflective type


**FD-60**

Reflective type

Horizontal direction



Vertical direction



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Fibers

Fiber Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311


FX-301-F7/

FX-301-F


SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.**FD-61**

Reflective type


Horizontal direction



Vertical direction


**FD-61G**

Reflective type


**FD-61S**

Reflective type

Horizontal direction




Vertical direction


**FD-61W**

Reflective type

Horizontal direction




Vertical direction


**FD-62**

Reflective type

Horizontal direction




Vertical direction


**FD-64X**

Reflective type

Horizontal direction




Vertical direction


**FD-A16**

Reflective type

Horizontal direction




Vertical direction


**FD-AL11**

Reflective type

Horizontal direction




Vertical direction




SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.**FD-E13**

Reflective type


Horizontal direction




Vertical direction

**FD-E23**


Reflective type

**FD-EG30**


Reflective type

**FD-EG30S**


Reflective type

**FD-EG31**

Reflective type


**FD-H13-FM2**

Reflective type


**FD-H18-L31**

Reflective type


Horizontal direction




Vertical direction

**FD-H20-21**

Reflective type


**FD-H20-M1**

Reflective type


**FD-H25-L43**

Reflective type

Horizontal direction



Vertical direction

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRESAVING
UNITSWIRESAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

















HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
Guide

Fibers

Fiber
Amplifiers**FX-500****FX-100****FX-300****FX-410****FX-311****FX-301-F7/
FX-301-F**

SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field**


Sensing characteristics are listed in the alphabetic order of the Model No. (Models with same sensing characteristics are grouped together.)

FD-H25-L45**Reflective type****Horizontal direction****Vertical direction****FD-H30-L32****Reflective type****Horizontal direction****Vertical direction****FD-H30-L32V-S****Reflective type****Horizontal direction****Vertical direction****FD-H35-20S****Reflective type****FD-H35-M2****Reflective type****FD-H35-M2S6****FD-L10****Reflective type****Horizontal direction****Vertical direction****FD-L11****Reflective type****Horizontal direction****Vertical direction****FD-L12W****Reflective type****Horizontal direction****Vertical direction****FD-L20H****Reflective type****Horizontal direction****Vertical direction**


SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.**FD-L21**

Reflective type

Horizontal direction




Vertical direction


**FD-L21W**

Reflective type

Horizontal direction




Vertical direction


**FD-L22A**

Reflective type

Horizontal direction




Vertical direction


**FD-L23**

Reflective type

Horizontal direction




Vertical direction


**FD-L30A**

Reflective type

Horizontal direction




Vertical direction


**FD-L31A**

Reflective type

Horizontal direction




Vertical direction


**FD-L32H**

Reflective type

Horizontal direction




Vertical direction


**FD-R60**

Reflective type

Horizontal direction



Vertical direction

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC








HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
Guide

















Fibers

Fiber
Amplifiers**FX-500****FX-100****FX-300****FX-410****FX-311****FX-301-F /****FX-301-F**

SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field**

Sensing characteristics are listed in the alphabetic order of the Model No.

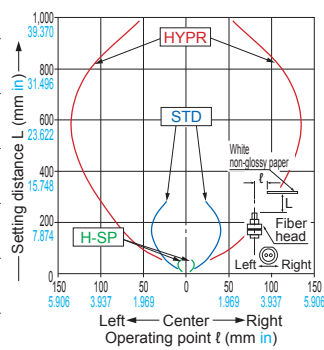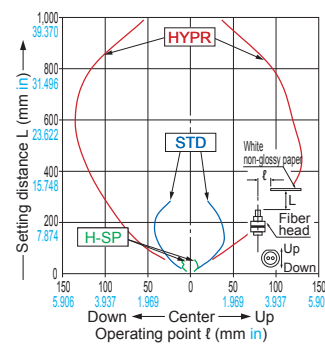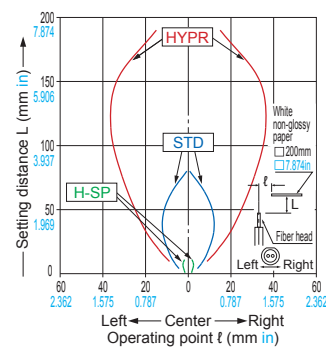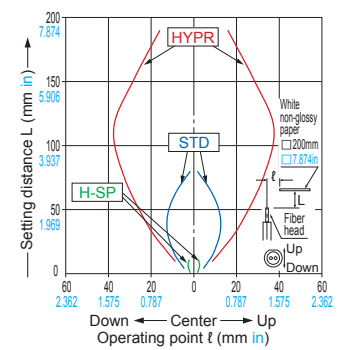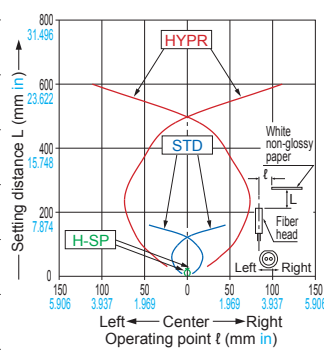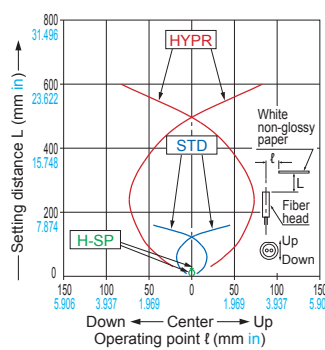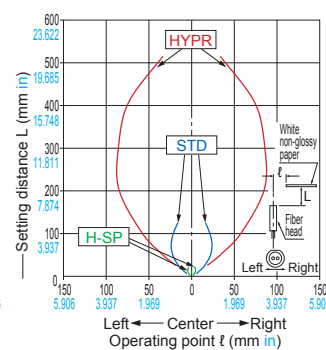FD-R61Y**Reflective type****Horizontal direction****Vertical direction****FD-S21****Reflective type****Horizontal direction****Vertical direction****FD-S30****Reflective type****Horizontal direction****Vertical direction****FD-S31****Reflective type****Horizontal direction**

SENSING CHARACTERISTICS (TYPICAL)**Reflective type Sensing field** Sensing characteristics are listed in the alphabetic order of the Model No.**FD-V30****Reflective type****Horizontal direction****Vertical direction****FD-V30W****Reflective type****Horizontal direction****Vertical direction****FD-V50****Reflective type****Horizontal direction****Vertical direction****FD-Z20HBW****Reflective type****Horizontal direction****Vertical direction****FD-Z20W****Reflective type****Horizontal direction****Vertical direction****FD-Z40HBW****Reflective type****Horizontal direction****Vertical direction****FD-Z40W****Reflective type****Horizontal direction****Vertical direction****FD-Z50HW****Reflective type****Horizontal direction****Vertical direction****FIBER SENSORS****LASER SENSORS****PHOTO-ELECTRIC SENSORS****MICRO PHOTO-ELECTRIC SENSORS****AREA SENSORS****LIGHT CURTAINS / SAFETY COMPONENTS****PRESSURE / FLOW SENSORS****INDUCTIVE PROXIMITY SENSORS****PARTICULAR USE SENSORS****SENSOR OPTIONS****SIMPLE WIRE-SAVING UNITS****WIRE-SAVING SYSTEMS****MEASUREMENT SENSORS****STATIC ELECTRICITY PREVENTION DEVICES****LASER MARKERS****PLC****HUMAN MACHINE INTERFACES****ENERGY CONSUMPTION VISUALIZATION COMPONENTS****FA COMPONENTS****MACHINE VISION SYSTEMS****UV CURING SYSTEMS****Selection Guide****Fibers****Fiber Amplifiers****FX-500****FX-100****FX-300****FX-410****FX-311****FX-301-F / FX-301-F**

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
Guide

Fibers

Fiber
Amplifiers

FX-500

FX-100

FX-300

FX-410

FX-311

FX-301-F7/
FX-301-F**PRECAUTIONS FOR PROPER USE**

Refer to the "PRO mode operation manual" on our website for details.



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

Wiring

- Make sure that the power supply is OFF while adding or removing the amplifiers.
- Note that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the product may get burnt or damaged.
- Note that short-circuit of the load or wrong wiring may burn or damage the product.
- Do not run the wires together with high-voltage lines or power lines, or put them in the same raceway. This can cause malfunction due to induction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Make sure to use the quick-connection cable (optional) for the connection of the controller. Extension up to total 100 m **328.084 ft** is possible with 0.3 mm² or more, cable. However, in order to reduce noise, make the wiring as short as possible.
- Make sure that stress by forcible bending or pulling is not applied to the sensor cable joint and fiber cable.

Others

- Our products have been developed / produced for industrial use only.
- The specification may not be satisfied in a strong magnetic field.
- The ultra long distance (U-LG, HYPR) mode is more likely to be affected by extraneous noise since the sensitivity of that is higher than the other modes. Make sure to check the environment before use.
- Do not use during the initial transient time (H-SP, FAST, STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.) after the power supply is switched ON.
- These sensors are only for indoor use.
- Avoid dust, dirt, and steam.
- Make sure that the product does not come in contact with oil, grease, organic solvents such as thinner, etc., strong acid or alkaline.
- This product cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify this product.
- This product adopts EEPROM. Settings cannot be done a million times or more because of the EEPROM's lifetime.

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS


PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
Guide

Fibers

Fiber
Amplifiers**FX-500****FX-100****FX-300****FX-410****FX-311****FX-301-F /
FX-301-F****FX-501(P) FX-502(P)**


Amplifier

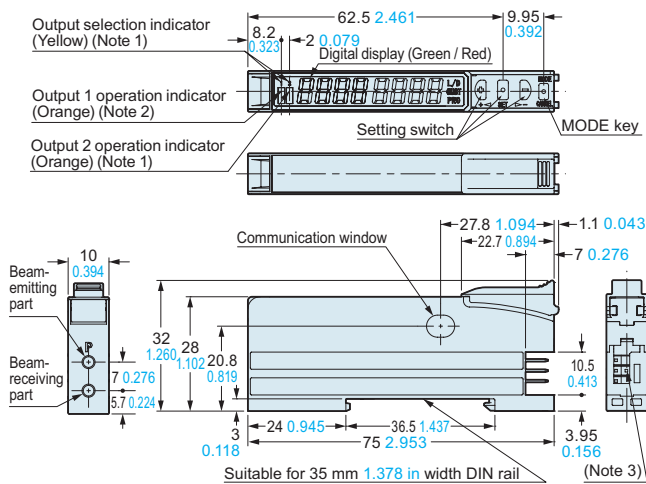

- Notes: 1) **FX-502(P)** only
 2) **FX-501(P)**: Operation indicator
 3) **FX-501(P)**: 3-pin, **FX-502(P)**: 4-pin

FX-505-C2 FX-505P-C2


Amplifier

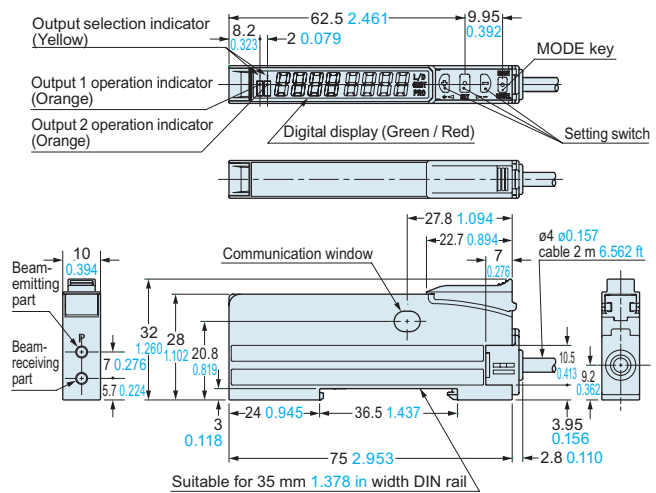**CN-73-C□ CN-74-C□**

Main cable (Optional)

• Length L

Model No.	Length L
CN-73/74-C1	1,000 39.370
CN-73/74-C2	2,000 78.740
CN-73/74-C5	5,000 196.850

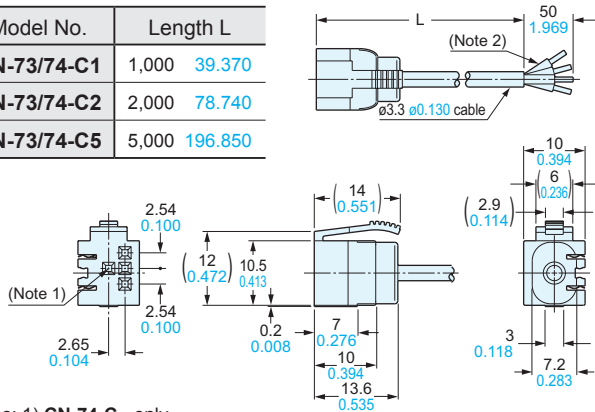


- Notes: 1) **CN-74-C□** only
 2) **CN-73-C□**: 3-core

CN-71-C□ CN-72-C□

Sub cable (Optional)

• Length L


Model No.	Length L
CN-71/72-C1	1,000 39.370
CN-71/72-C2	2,000 78.740
CN-71/72-C5	5,000 196.850

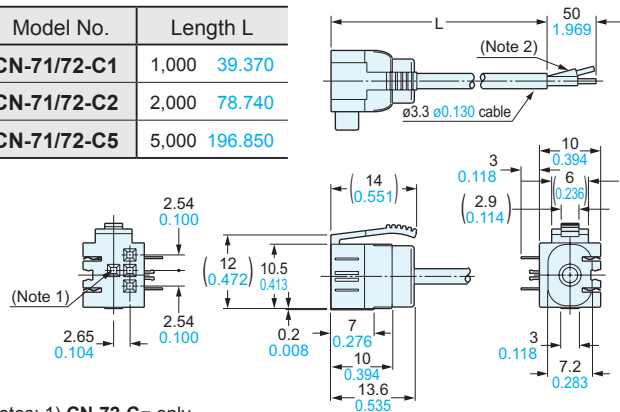

- Notes: 1) **CN-72-C□** only
 2) **CN-71-C□**: 1-core

MS-DIN-2


Amplifier mounting bracket (Optional)

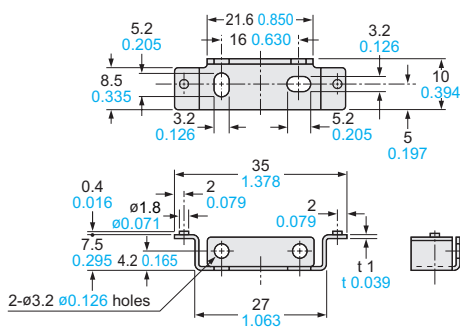

Material: Cold rolled carbon steel (SPCC)
 (Uni-chrome plated)

MS-DIN-E

End plate (Optional)

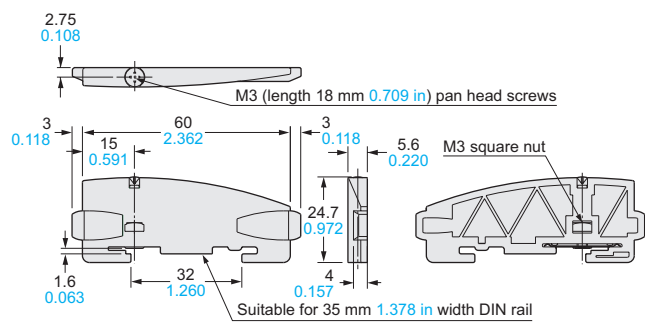

Material: Polycarbonate