

Compact Time-Of-Flight Laser Sensor

TOF-DL Series

Object Detection in Long Distance

- IO-Link connection supported
- Measurement range: 0.25 to 2.5m
- The smallest TOF sensor in class
- Built-in digital display for simple setup

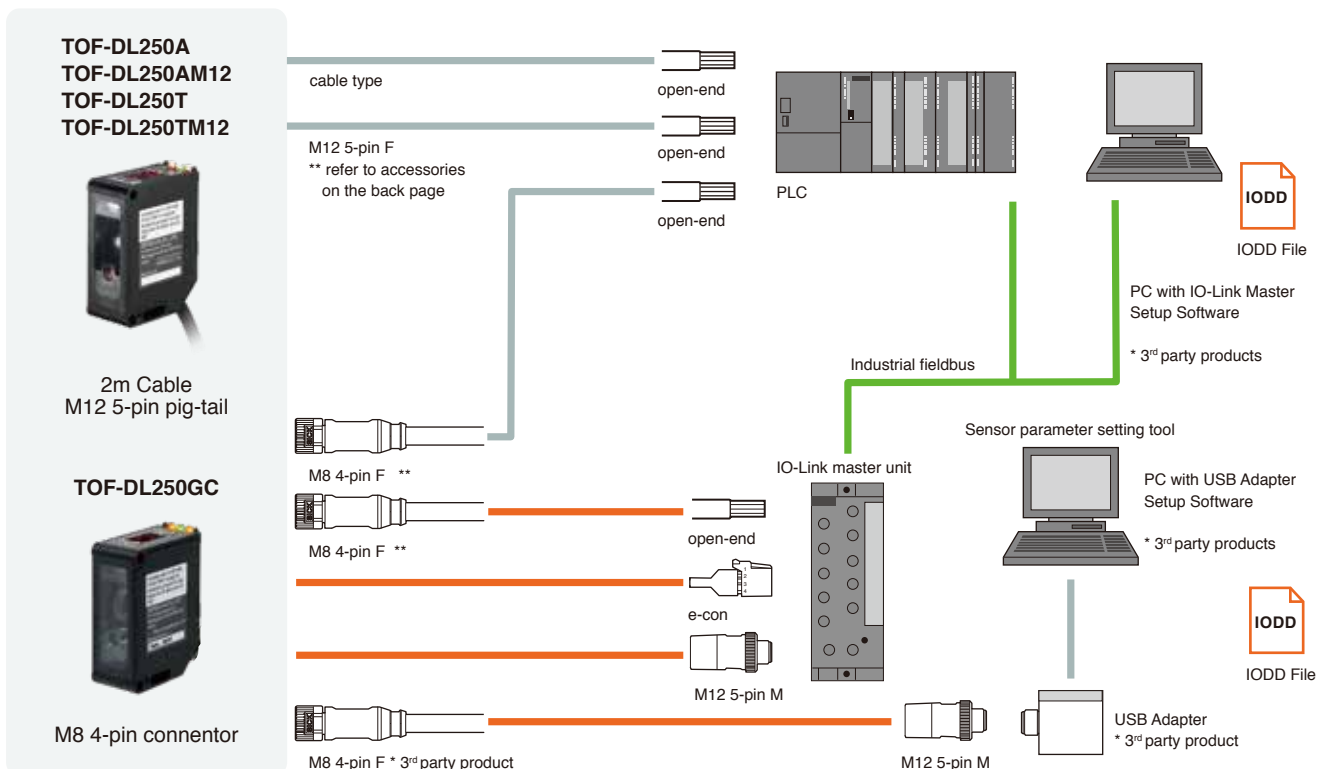


Photo: Cable type

Lineup

Type	Measurement range	Laser class (IEC/FDA)	IO-Link	I/O	Connection type	Model
TOF		Class 1	✓	Control output x2 (External input)	M8 connector	NEW TOF-DL250GC
			—	Analog output Control output External input	Cable	TOF-DL250A
			—	Analog output Control output External input	M12 pig-tail	TOF-DL250AM12
			—	Control output x3 (External input)	Cable	TOF-DL250T
			—	Control output x3 (External input)	M12 pig-tail	TOF-DL250TM12

System structure



Specifications

Type		Analog output type	Three-output type	IO-Link type
Model	Cable type	TOF-DL250A	TOF-DL250T	-
	M12 Pig-tail type	TOF-DL250AM12	TOF-DL250TM12	-
	M8 connector type	-	-	TOF-DL250GC
Measurement range *1		0.25 to 2.5 m		
Light source	Medium/Wavelength	Red semiconductor laser, 650 nm		
	Average output	390 μW or less		
Laser class		Class 1 (IEC/JIS/FDA *2)		
Spot size *3		φ10 mm (At a distance of 2.5 m)		
Sampling period / Response time		0.2 ms / 0.5 ms or less (When performing moving average once)		
Hysteresis		3% or less (Moving average: 64 times/256 times, Distance: 1 to 2.5 m)		
Sensitivity adjustment		Teaching + Manual adjustment		
Indicators		Output, Stability/Laser OFF	Output 1 to 3, Stability/Laser OFF	Detection 1 and 2 Power/IO-Link
Digital display		7-segment, 3-digit LED display (Display unit: cm)		
External input		Selectable by setting		
Control output	No. of outputs	1	3	2
	Type	NPN/PNP open collector		NPN/PNP, Push/Pull
	Max. current, Residual volt.	Max. 100 mA/30 VDC, 1.8 V Max.		
	Stability output	Output 1 switchable to stability output		-
	Output mode	Light ON / Dark ON selectable		Invertable
Analog output,IO-Link		4 to 20 mA (<300 Ω) or 0 to 10 V (<100 Ω), selectable	-	Ver. 1.1, COM 3 (230.4 kbps), P-data length: 4 byte, Min. cycle time: 1.0 ms
Supply voltage (Including 10% ripple (p-p))		12 to 30 VDC *4	10 to 30 VDC	IO-Link: 18 to 30 VDC SIO: 10 to 30 VDC
Current consumption		60 mA or less *5		
Applicable regulations	EMC	EMC directive (2014/30/EU)		
	RoHS	RoHS directive (2011/65/EU), China RoHS (Directive 32)		
	Safety	FDA regulations (21 CFR 1040.10 and 1040.11*6)		
Applicable standards	UL / cUL	cURus Recognized		cULus Listed
	EN	EN 60947-5-7/IEC 60825-1	EN 60947-5-2/IEC 60825-1	
Ambient temperature/humidity		-10 to +50°C (No freezing) / 35 to 85% RH (No condensation)		
Ambient illuminance		Sunlight: 4,000 lx or less, Fluorescent lamp: 3,000 lx or less		
Vibration resistance		10 to 55 Hz, double amplitude 1.5 mm, 2 hours in each of the XY and Z directions		
Shock resistance		500 m/s ² (Approx. 50 G), 3 times in each of the XY and Z directions		
Protection category		IP67		
Material		Housing: PC, Front cover: PMMA		
Weight		Cable: 88 g, Pig-tail: 48 g		30 g
Included accessories		Mounting bracket: BEF-WK-190, Mounting screws (M3 x 20 mm)		

*1. For black paper (6% reflectance), gray paper (18% reflectance), and white paper (90% reflectance).

*2. In accordance with the FDA provisions of Laser Notice No. 50, the laser is classified as Class 1 per the IEC 60825-1:2007 and 2014 standards.

*3. Defined with 1/e² (13.5%) of the center strength at the maximum detection distance. The sensor may be affected by light leakage at spot sizes other than the default and when there is a highly reflective object close to the detection area.

*4. Use a power supply voltage of 12.0 VDC or higher to obtain normal output.

*5. Not including control output load current. *6. Excluding differences per Laser Notice No. 50.

Wiring & pin assignments

M12 pig-tail type

Analog output type

Pin	Wire	Connection
①	Brown	12 to 30 VDC
②	White	Analog output
③	Blue	0 V
④	Black	Output
⑤	Gray	External input

Three-output type

Pin	Wire	Connection
①	Brown	10 to 30 VDC
②	White	Output 2
③	Blue	0 V
④	Black	Output 1
⑤	Gray	External input/output 3

M8 connector type pin

IO-Link type

Pin	Wire	Connection
①	Brown	10 to 30 VDC
②	White	Output 2/External input
③	Blue	0 V
④	Black	Output 1/IO-Link


M12 pig-tail pin No.



M8 connector pin No.



Dimensions

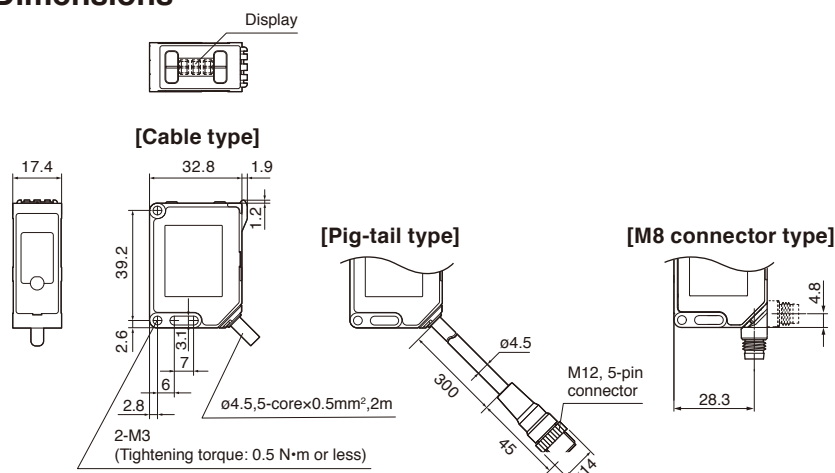

Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death. Before use please read an instruction manual.

• Specifications are subject to change without prior notice.

Accessories

M12 5-pin open-end cables		
Straight	2m	YF2A15-020VB5XLEAX
	5m	YF2A15-050VB5XLEAX
	10m	YF2A15-100VB5XLEAX
M8 4-pin open-end cables		
Straight	2m	M84CN-2S
	5m	M84CN-5S
	10m	M84CN-10S
L-shaped	2m	M84CN-2L
	5m	M84CN-5L
	10m	M84CN-10L



OPTEX FA CO., LTD.

91 Chudoji-Awata-cho Shimogyo-ku Kyoto 600-8815 JAPAN

TEL. +81-(0)75-325-1314 FAX. +81-(0)75-325-2936

<https://www.optex-fa.com>

Catalog content accurate as of August 2019.

78029-00-006-1908