

378

TOF type

**TOF-3V** series

## Long Sensing Distance Sensor

| TOF, Time Of Flight, method forms the technical basis for maximum reliability and high precision

| Immune to object color and angle

### Related products


Compact type

**TOF-L**  
 ● P.364



Display &amp; Analog output

**TOF-DL**  
 ● P.370



Position detection of items on moving palette.

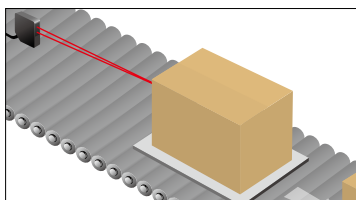

Position detection of automated guided vehicle.

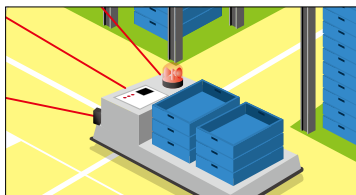

Level detection of melted aluminum liquid.

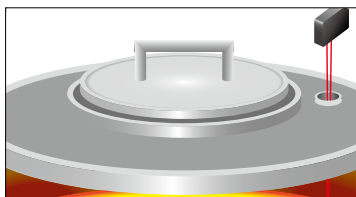

### Selection table

Type	Shape	Sensing distance	Control output	Model (Models in parentheses are connector types)	
				NPN type	PNP type
Diffuse-reflective		0.3 to 3 m	1CH	<b>TOF-3V300N1</b> (TOF-3V300CN1)	<b>TOF-3V300P1</b> (TOF-3V300CP1)
			2CH	<b>TOF-3V300N</b> (TOF-3V300CN)	<b>TOF-3V300P</b> (TOF-3V300CP)
Retro-reflective		0 to 20 m	2CH	<b>TOF-3V2000N</b> (TOF-3V2000CN)	<b>TOF-3V2000P</b> (TOF-3V2000CP)

### Options/Accessories

Reflectors for TOF-3V2000□

Standard (included)


**V-61**

Sensing distance: 0.01 to 20 m

Connector cable



**DOL-1205-G02M**

Cable length: 2 m


\*5 m and 10 m cables are separately available.  
 \*Robot cables are also available.



Standard diffuse-reflective sensor

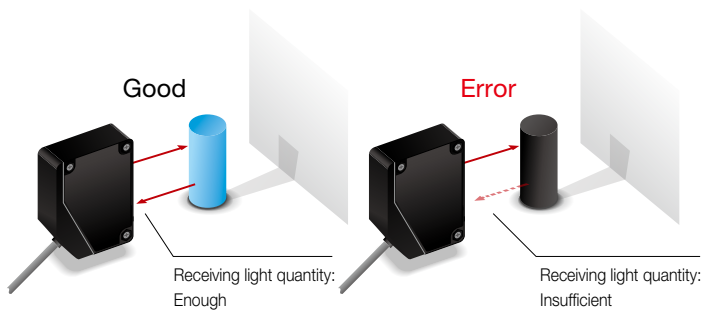


TOF (Diffuse-reflective)

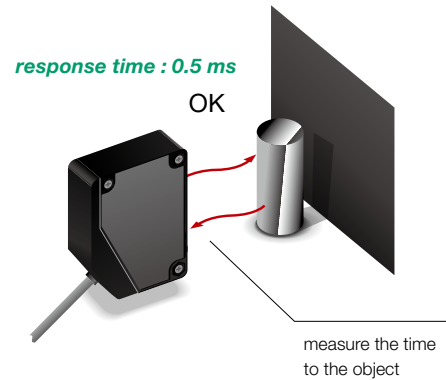

Super tight hysteresis (Diffuse-reflective)

Optex FA's skill in TOF technology design provides super tight hysteresis between black and white objects (2% at 3 m distance)

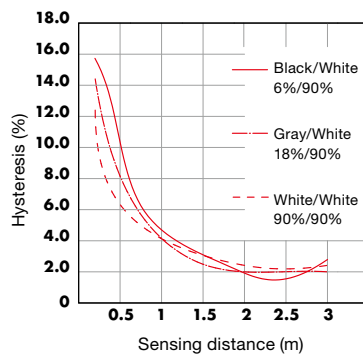



Crosstalk prevention-2pcs MAX.

Up to 2pcs can be mounted side by side.



Dual laser system

The sensor uses two laser diodes in order to compensate for temperature drift of the laser pulse rise time. One laser diode is inside the case and emits directly to a receiver element. The other emits on the outside of the case. By compensating for the time difference between the two laser pulses, the time measurement remains consistent regardless of temperature changes.

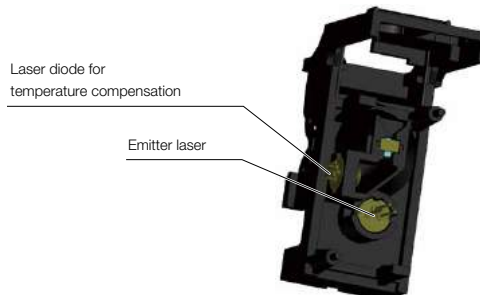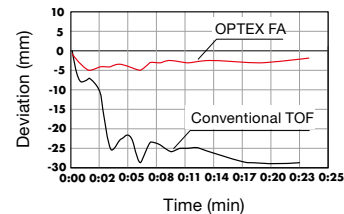

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Long-range BGS Sensors

TOF-L

TOF-DL

TOF-3V

BGS-2V

TOF type **TOF-3V** series

## Specifications

Type			Diffuse Reflective	Retro Reflective	
Model	Cable type	NPN	Output: 1CH	TOF-3V300N1	—
			Output: 2CH	TOF-3V300N	TOF-3V2000N
		PNP	Output: 1CH	TOF-3V300P1	—
			Output: 2CH	TOF-3V300P	TOF-3V2000P
	Connector type	NPN	Output: 1CH	TOF-3V300CN1	—
			Output: 2CH	TOF-3V300CN	TOF-3V2000CN
		PNP	Output: 1CH	TOF-3V300CP1	—
			Output: 2CH	TOF-3V300CP	TOF-3V2000CP
Detecting object/target			Opaque (Reflectance: 6 to 90%)	Reflector : V-61	
Sensing distance			3000 mm (90% white)	20 m with Reflector V-61	
Light source			Red laser diode, wavelength: 650 nm, Maximum output: 5 mW		
Laser class			FDA: Class I JIS/IEC: Class1		
Spot size			ø12 mm at 3 m distance	ø50 mm at 20 m distance	
Optical angle deviation			0.5°(9 mrad) or less		
Hysteresis			15% Max : 300 to 1500 mm / 6% Max : 1500 to 3000 mm	10% Max : 1 to 4 m / 3% Max : 4 to 20 m	
Repeat accuracy			2 mm	10 mm	
Response time			0.5 ms	2 ms	
Output mode			Light ON/ Dark ON selectable		
Environmental illuminance			Sunlight : 4,000 lx, Incandescent lamp : 3,000 lx (at 1 m)		
Indicator			Output indicator: Orange x 2 (2-output type), Stable indicator : Green		
Distance adjustment			4-turn Potentiometer	12-turn Potentiometer.	
External input			Laser OFF		
Crosstalk prevention			Up to 2 pcs.		
Supply voltage			10 to 30 VDC ±10%, 70 mA max.		
Circuit protection			Reverse connection protection, Over current protection		
Control output			NPN/PNP Open collector, 30V/100mA, (Residual voltage 1.8 V max.)		
Connection (cable)			ø3.8 2 m cable 5 wires (2-output type) , 4 wires (1-output type)		
Connection (M12 connector)			M12, 5-pin connector		
EMC			EN60497-5-2		
Initialization time			300 ms		
Internal short circuit			according to VDE 160		
Materials			ABS/PMMA		
Degree of protection			IP67		
Vibration resistance			10 to 55 Hz, Double amplitude 1.5 mm, X, Y, Z for 2 Hours		
Shock resistance			500m/s² (approx. 50G) X, Y, Z 3 times each		
UL			cUL		
CE			EMC directive		
Operating temp. humidity			-10 to +50°C, 35 to 85% RH		
Storage temp. humidity			-40 to +70°C, 35 to 95% RH		
Temperature drift			±1% max.		



Photoelectric  
SensorsSpecialized  
Photoelectric  
SensorsLaser  
Displacement  
SensorsLong-range  
BGS Sensors

TOF-L

TOF-DL

TOF-3V

BGS-2V

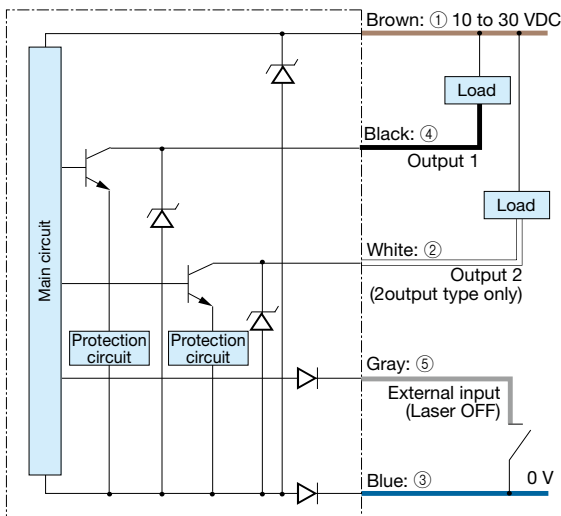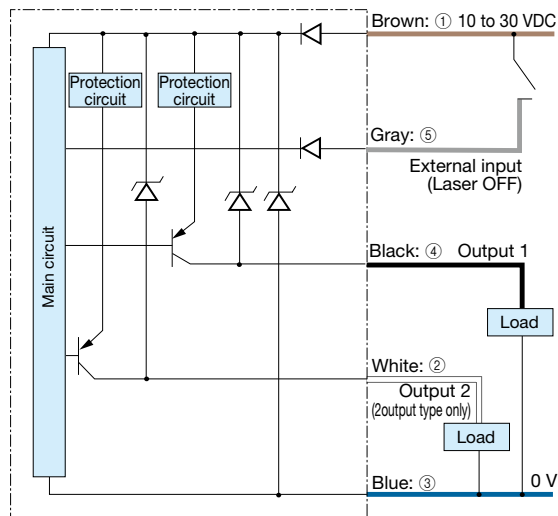**I/O circuit diagram**■ **NPN output type**■ **PNP output type**■ **Connector type**

(Pin configuration) Sensor side Connector cable side



- ① 10 to 30 VDC
- ② Output 2 (2 Output type only)
- ③ 0 V
- ④ Output 1
- ⑤ External input (Laser OFF)

**Connecting**

- When not used for control output 2 or external input, cut the lead wire and wrap it individually with insulating tape, and do not connect it to any other terminal.
- ① to ⑤ correspond to connector pin No.

**Notes**

- When using a switching regulator for the power supply, be sure to ground the frame ground terminal.
- Because wiring sensor wires with high-voltage wires or power supply wires can result in malfunctions due to noise, which can cause damage, make sure to wire separately.
- Avoid using the transient state while the power is on (approx. 300 ms).

382

Specialized  
Photoelectric SensorsPhotoelectric  
SensorsSpecialized  
Photoelectric  
SensorsLaser  
Displacement  
SensorsLong-range  
BGS Sensors

TOF-L

TOF-DL

TOF-3V

BGS-2V


TOF type **TOF-3V** series

## Dimensions

## Sensor


(Unit: mm)

## ■ Connector type/cable type

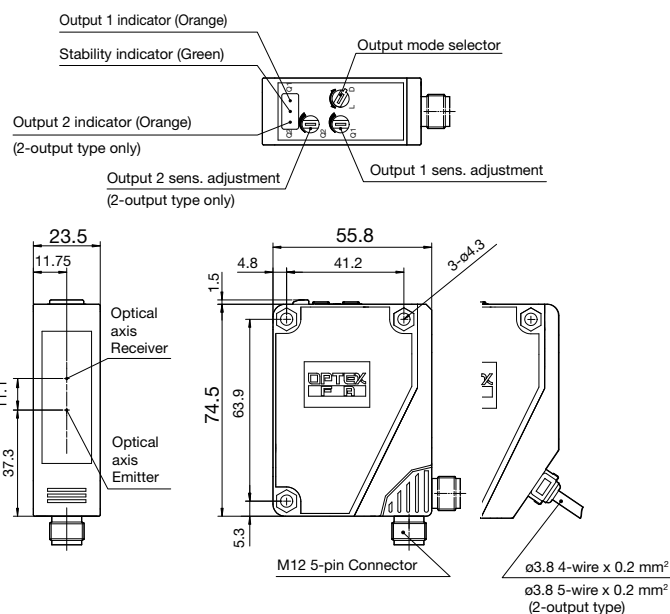


## Mounting bracket

## ■ Floor-mounted

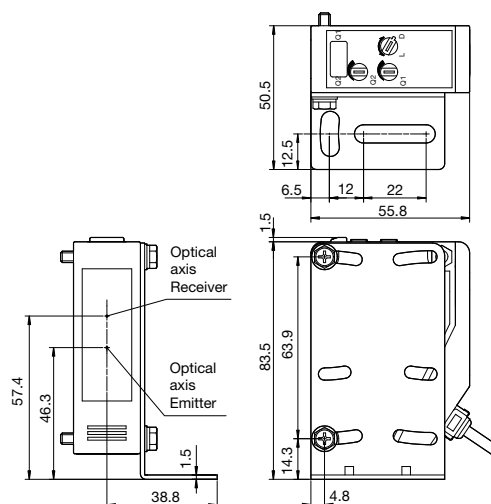


## ■ Wall-mounted

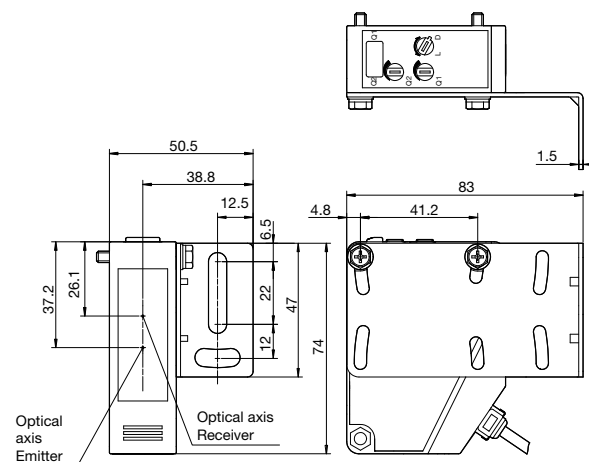**OPTEX**  
FA

## Reflectors for TOF-3V2000□


■ V-61: Standard type reflector

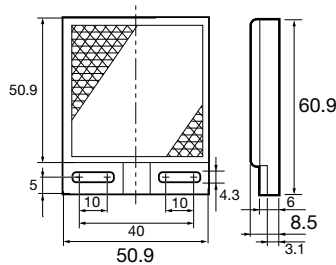

## Connector cable

■ Cable for M12 connector type


DOL-1205-G02M

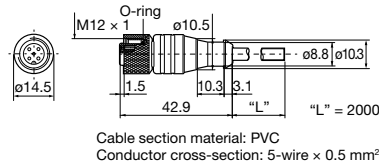


## Typical characteristic data

### TOF-3V300□

Sensing Area

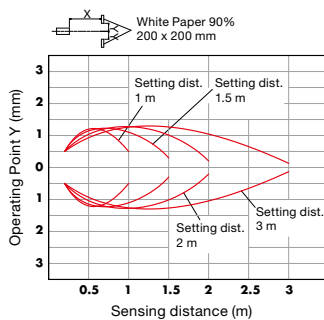


Spot Size

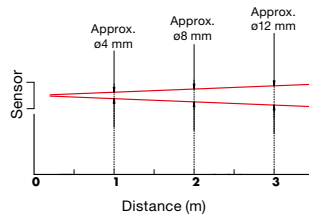

### TOF-3V2000□

Sensing Area

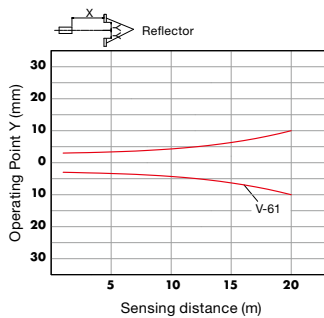

Spot Size

