

Compact terminal block type controller Superior basic performance and wealth of functions

PNP type has been added to the lineup!



High-speed operation

- Basic instruction (ST instruction): 0.04 μ s/step
Up to 7 k steps (ratio to convention: 8 times)

Large capacity program memory

- Program capacity: Max. 40 k steps (For C14: 16 k steps)
24 k / 32 k / 40 k steps selectable

Expandability


- Max. I/O points: 300 points
One control unit connectable to up to 8 expansion units
(382 points when using FP0R expansion units and add-on cassettes)
- Up to 4 add-on cassettes can be added (for C30, C60)




Multi-axis positioning control

- On up to 6 axes, built-in 100 kHz high-speed pulse output function
(Transistor output type has a built-in pulse output function for 3 axes for C14, 4 axes for C30 and 6 axes for C60)

X-Y table + Machining head Semiconductor wafer take-out blade



C14: 3-axis control




C30 / C60: 4-axis control

Network

- Communication port: Max. 5 channels
Support for up to 5 channels including 2 communication cassettes (2 channels type) and tool port.
- Compatible with Modbus-RTU
Compatible with master / slave of Modbus-RTU, industry standard
- PLC link
Bit data and word data can be shared (linked) via connection with FP-XH (up to 16 units).

FP-XH Name and function of each part

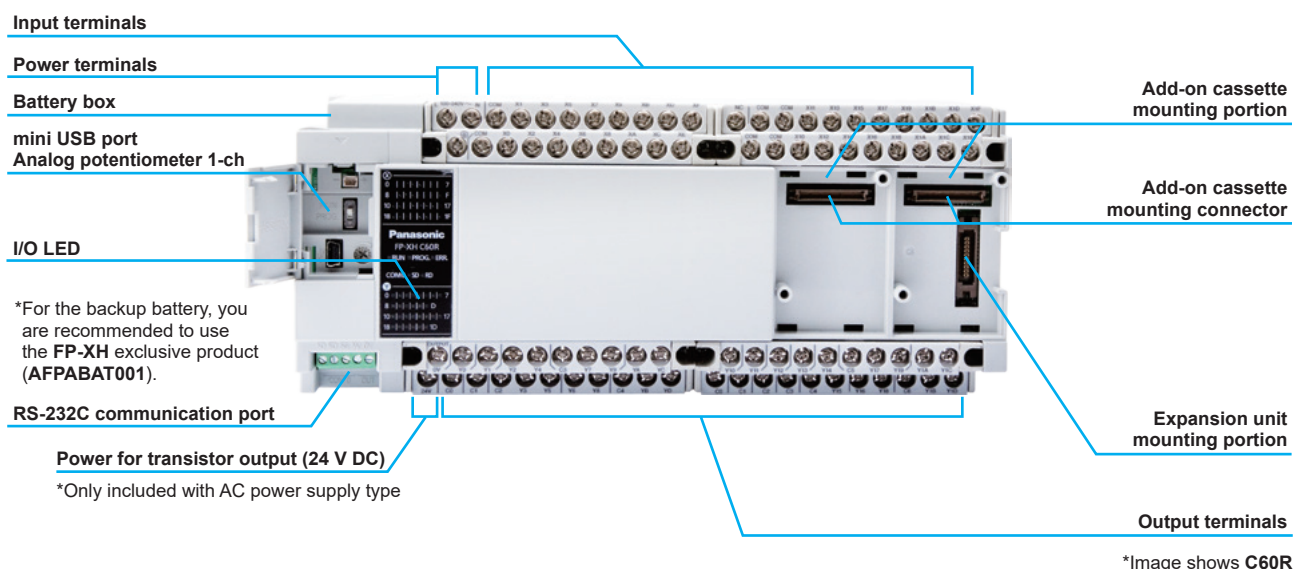

Compatibility

Inherits FP-X technology and improves functionality

Expandability

Enables building systems that can be configured with FP-X.

Program

Can use existing FP-X programs
Equipped with FP-X compatibility mode.

Size

Dimensions larger than equivalent FP-X.

C14: Ratio to convention Width 26 mm 1.024 in wider, Depth 3 mm 0.118 in deeper
C30 / C60: Ratio to convention Width 30 mm 1.181 in wider, Depth 3 mm 0.118 in deeper

Function comparison table

Comparison items		FP-XH	FP-X
Operation speed	Basic instruction	0.04 μ s/step (under 7 k steps) 0.7 μ s/step (7 k steps or more)	0.32 μ s/step
	High-level instruction	0.22 μ s/step (under 7 k steps) 1.73 μ s/step (7 k steps or more)	7.5 μ s/step
Program capacity	C14	16 k steps	16 k steps
	C30 / C60	24 k / 32 k / 40 k steps (Variable according to setting) *DT capacity varies according to the program capacity	32 k steps
Pulse output performance	Transistor output type	100 kHz $\times$ 3 channels / 4 channels / 6 channels	100 kHz $\times$ 2 channels + 20 kHz $\times$ 2 channels
	Relay output type	100 kHz $\times$ 2 channels *When pulse output cassette is used	100 kHz $\times$ 1 channel or 80 kHz $\times$ 2 channels *When pulse output cassette is used
High-speed counter performance	Transistor output type	100 kHz $\times$ 4 channels / 6 channels + 10 kHz $\times$ 4 channels *6-ch pulse output available only with 60-point transistor output type	50 kHz $\times$ 4 channels + 10 kHz $\times$ 4 channels
	Relay output type	(Built-in) 10 kHz $\times$ 8 channels (Pulse output cassette) 100 kHz $\times$ 4 channels	(Built-in) 10 kHz $\times$ 8 channels (Pulse output cassette) 50 kHz $\times$ 4 channels
Communication	Communication port (Control unit)	USB $\times$ 1 + RS-232C $\times$ 1 *USB 2.0 compatible *RS-232C port has European terminal block	USB $\times$ 1 + RS-232C $\times$ 1 *Round-pin RS-232C port
	Communication port (Cassette)	Max. 4 channels	Max. 2 channels
Others	Positioning control	Dedicated tool + Control by new instructions	Control by high-level instructions
	Analog volume	1 channel	C14 / C30: 2 channels, C60: 4 channels
	Cassette combination restrictions	No	Yes
	Tool	Compatible with FPMIN Pro7 / GR7	Compatible with FPMIN Pro7 / GR7
	Backup battery	AFPABAT001	AFPX-BATT

Control FPCWIN GR7



"Save" time on programming with user-friendly software

Configuration, editing programming, searching, monitoring, debugging, security, etc. PLC programming demands a lot of time and effort.

Many programmers get hung up on "trying out different configurations", "consulting the manual", and "re-writing repetitive code blocks".

The "Control FPCWIN GR7" programming software is designed to eliminate these inefficiencies and minimize programming complexity.

Control FPCWIN Pro7



Programming software of PLC open certification corresponds to FP7.

Control FPCWIN Pro is the Panasonic programming software developed according to the international standard IEC 61131-3. **Control FPCWIN Pro** is the universal software for all Panasonic PLC's and **ELC500** control unit.

- Programs written in **Control FPCWIN Pro6** or earlier versions will run with **Control FPCWIN Pro7**.
- Programs are compatible across **FP** series PLCs, e.g. **FP0R** will run with minor adjustments on **FPΣ** (Sigma) and **FP7** PLCs.
- **Control FPCWIN Pro7** offer the same flexible choice of editors and allow you to select the programming language you are most familiar with.

Product types

Product name	Power supply	Specifications	Program capacity	Part No.
FP-XH C14R	100 to 240 V AC	8-point input of 24 V DC, 6-point relay output of 2 A	16 k steps	AFPXHC14R
FP-XH C14RD	24 V DC	8-point input of 24 V DC, 6-point relay output of 2 A	16 k steps	AFPXHC14RD
FP-XH C14T	100 to 240 V AC	8-point input of 24 V DC, 0.5 A / 5 to 24 V DC, 6-point output of transistor (NPN)	16 k steps	AFPXHC14T
FP-XH C14TD	24 V DC	8-point input of 24 V DC, 0.5 A / 5 to 24 V DC, 6-point output of transistor (NPN)	16 k steps	AFPXHC14TD
FP-XH C14P	100 to 240 V AC	8-point input of 24 V DC, 0.5 A / 24 V DC, 6-point output of transistor (PNP)	16 k steps	AFPXHC14P
FP-XH C14PD	24 V DC	8-point input of 24 V DC, 0.5 A / 24 V DC, 6-point output of transistor (PNP)	16 k steps	AFPXHC14PD
FP-XH C30R	100 to 240 V AC	16-point input of 24 V DC, 14-point relay output of 2 A	32 k steps	AFPXHC30R
FP-XH C30RD	24 V DC	16-point input of 24 V DC, 14-point relay output of 2 A	32 k steps	AFPXHC30RD
FP-XH C30T	100 to 240 V AC	16-point input of 24 V DC, 0.5 A / 5 to 24 V DC, 14-point output of transistor (NPN)	32 k steps	AFPXHC30T
FP-XH C30TD	24 V DC	16-point input of 24 V DC, 0.5 A / 5 to 24 V DC, 14-point output of transistor (NPN)	32 k steps	AFPXHC30TD
FP-XH C30P	100 to 240 V AC	16-point input of 24 V DC, 0.5 A / 24 V DC, 14-point output of transistor (PNP)	32 k steps	AFPXHC30P
FP-XH C30PD	24 V DC	16-point input of 24 V DC, 0.5 A / 24 V DC, 14-point output of transistor (PNP)	32 k steps	AFPXHC30PD
FP-XH C60R	100 to 240 V AC	32-point input of 24 V DC, 28-point relay output of 2 A	32 k steps	AFPXHC60R
FP-XH C60RD	24 V DC	32-point input of 24 V DC, 28-point relay output of 2 A	32 k steps	AFPXHC60RD
FP-XH C60T	100 to 240 V AC	32-point input of 24 V DC, 0.5 A / 5 to 24 V DC, 28-point output of transistor (NPN)	32 k steps	AFPXHC60T
FP-XH C60TD	24 V DC	32-point input of 24 V DC, 0.5 A / 5 to 24 V DC, 28-point output of transistor (NPN)	32 k steps	AFPXHC60TD
FP-XH C60P	100 to 240 V AC	32-point input of 24 V DC, 0.5 A / 24 V DC, 28-point output of transistor (PNP)	32 k steps	AFPXHC60P
FP-XH C60PD	24 V DC	32-point input of 24 V DC, 0.5 A / 24 V DC, 28-point output of transistor (PNP)	32 k steps	AFPXHC60PD

Programming tools

Product name	Type	Specifications	Part No.
Programming software for Windows® Control FPCWIN GR7	Japanese version	Supports only CPU unit without encryption function	AFPXSGR7JP
	Security enhanced type	Supports both CPU unit with / without encryption function	AFPXSGR7JPS
	English version	Supports only CPU unit without encryption function	AFPXSGR7EN
	Security enhanced type	Supports both CPU unit with / without encryption function	AFPXSGR7ENS
Programming software for Windows® Control FPCWIN Pro7	English, Japanese, Korean and Chinese	FP series all models (for FP7 series, supports only CPU unit without encryption function)	AFPXSPR7A
	Security enhanced type	FP series all models (for FP7 series, supports both CPU unit with / without encryption function) *The encryption function will be offered in the future.	AFPXSPR7AS

Note: Windows is trademarks or registered trademarks of Microsoft Corporation in the United States and other countries.

Option

Product name	Specifications	Part No.
FP-XH backup battery	Required when expanding the hold area of the operation memory or when using the clock / calendar function	AFPABAT001

Specifications

General specifications


Item	Specifications
Operating ambient temperature	0 to +55 °C +32 to +131 °F
Storage ambient temperature	-40 to +70 °C -40 to +158 °F
Operating ambient humidity	10 to 95 % RH (at +25 °C +77 °F , non-condensing)
Storage ambient humidity	10 to 95 % RH (at +25 °C +77 °F , non-condensing)
Breakdown voltage (Note)	AC power supply
	DC power supply
	Between power supply terminal and earth terminal
	Between power supply terminal and service power supply terminal
	Between input terminal and earth terminal
	Between output terminal and earth terminal
	Between power supply terminal and earth terminal
	Between power supply terminal and service power supply terminal
Isolation resistance	Between input terminal and earth terminal
	Between output terminal and earth terminal
	Between power supply terminal and earth terminal
	Between power supply terminal and service power supply terminal
Vibration resistance	5 to 8.4 Hz, 3.5 mm 0.138 in single amplitude 8.4 to 150 Hz, Acceleration 9.8 m/s ² 10 min. each in the X, Y and Z directions (1 octave/min)
Shock resistance	147 m/s ² , 4 times each in the X, Y and Z directions
Noise resistance	1,000 V [P-P] with pulse widths of 50 ns and 1 µs (using a noise simulator) (Power supply terminal)
Operating condition	No corrosive gas and no excessive dust
Applicable standard for EC directives	EMC directive: EN 61131-2 (directive concerning emission, immunity and low voltage)
Over-voltage category	Category II
Level of contamination	2

Note: Cut-off current 5 mA (Initial value at shipment)


Dimensions (Unit: mm in)

The CAD data can be downloaded from our website.


AFXHC14



AFXHC30

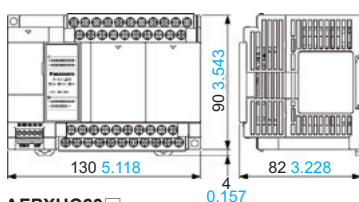

AFXHC60

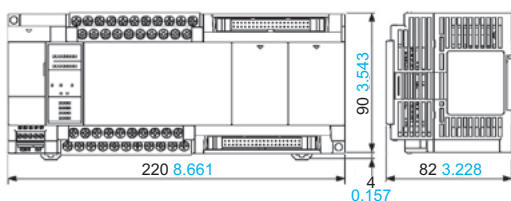

- Notes: 1) When changing the system register No.0 (sequence program capacity), the data register (DT) capacity will also change.
2) The number of points in the table is the number of points of operation memory. The number of points actually available to be used is determined by the hardware configuration.
3) Can be selected by the setting of the system register No. 1 (internal relay capacity). To provide compatibility with the conventional **FP-X** series control unit, select 4,096 points.
4) The number of timer points can be changed by the setting of the system register No.5.
5) The maximum counting speed and maximum output frequency for the high-speed counter, pulse output and PWM output indicate the specifications for the voltage of 24 V DC and ambient temperature of +25 °C **+77 °F**. The frequency may decrease depending on voltage, temperature or combination of functions used.
6) The inputs and outputs used for each function of the high-speed counter, pulse output, PWM output, pulse catch input or interrupt input cannot be allocated in duplication.
7) Battery lifetime values is calculated when the power is not completely turned on. Since the actual value depends on conditions of use, in practice, the lifetime may be shorter.

Functional specifications

Item	Specifications
Programming method	Relay symbol
Control method	Cyclic operation
Program memory	Built-in Flash ROM
Program capacity	C14 : 16 k steps, C30 / C60 : 24 k / 32 k / 40 k steps (switch-over) (Note 1)
Basic instructions	Approx. 110
High-level instructions	Approx. 220
Operation speed	Basic instruction (ST): Approx. 0.04 µs/step (under 7 k steps)
	High-level instruction (FOMV): Approx. 0.22 µs/step (under 7 k steps) Approx. 1.73 µs/step (7 k steps or more)
Operation memory	External input (X) (Note 2)
	External output (Y) (Note 2)
	Internal relay (R) (Note 3)
	Special internal relay (R)
	Timer / Counter (T / C) (Note 4)
	Link relay (L)
	Data register (DT)
	Special data register (DT)
	Link data register (LD)
	File register (FL)
Memory area	Index register (I)
Differential points	Points for program capacity
Master control relay points (MCR)	256 points
Number of labels (JMP + LOOP)	256 points
Number of step ladders	1,000 steps
Number of subroutines	500 subroutines
Number of interrupt program	Transistor output type: Input 8, Constant 1 Relay output type: Input 11 (for C30 / C60 : 14), Constant 1
High-speed counter (Note 5) (Note 6)	Control unit input
	Pulse I/O with cassette installed
Pulse output / PWM output (Note 5) (Note 6)	Control unit output
	Pulse I/O with cassette installed
Pulse catch input	Transistor output type: 8 points (Control unit input: 8 points) Relay output type: 14 points (Control unit input: 8 points, Pulse I/O cassette: 3 points × 2)
Interrupt input (Note 6)	
Periodical interrupt (Note 6)	0.1 ms to 30 sec.
Potentiometer input	1 channel (0 to 4,000)
Input time constant processing	Available
Clock / calendar	Available (only when the master memory cassette AFPX-MRTC and battery are installed)
Flash ROM backup	Backup by F12 / P13 instructions
	Automatic backup when power is off
Battery backup	Memory set in hold area of system register (only when battery is installed)
Battery lifetime	5 years or more in the actual use condition (operating 8 hours a day) (Note 7)
Password	Yes (Can be selected from 4 digits, 8 digits or 32 digits)
Self-diagnostic function	Watchdog timer, program syntax check, etc.
PLC link function	Max. 16 units, link relay: 1,024 points, link register: 128 words (Data transfer, remote programming: Not available)
Rewriting in RUN mode	Available (downloading in RUN mode, program rewriting in RUN mode) (Max. 512 steps)

Ramco Innovations

800-280-6933

www.ramcoi.com