



Got a tough application to solve? Contact Ramco to discuss your challenges
Our experts have the experience and technical expertise you're looking for!
email us at nsales@ramcoi.com

The New Standard of Ultra-compact PLCs

NEW

Equipped with RS485 Port

Largest in its class *1

Large Capacity Program and
Data Memory


Fastest in its class *1

Ultra-high Speed Processing

Multi-axis Control available
without Expansion

Industry's First *2

Battery-less Automatic Backup
of All Data

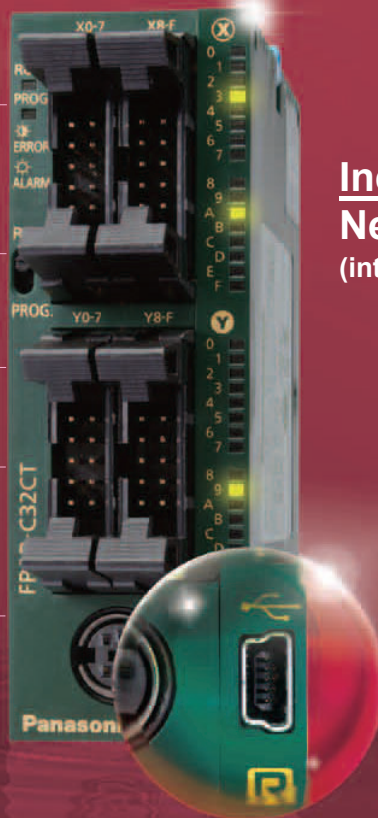

Includes information on:
New ANALOG I/O units
(introduced in June of 2015)

1. Among compact PLCs with up to 128 I/O points based on our research as of July 1, 2011

2. Based on our research as of July 1, 2011




Our Mission is to Maximize Customer Benefits with Enhancing Advanced Functionality and Performance.

The Answer is **FP0R**, Superior to Basic Ultra-

Smallest in its class *1


The control unit is small at 90 mm 3.54 in in height and 25 mm 0.98 in in width. Even when expanded with three expansion units, the total width only 100 mm

The ultra-compact space-saving body size facilitates the miniaturization of target machines, equipment, and control panels.

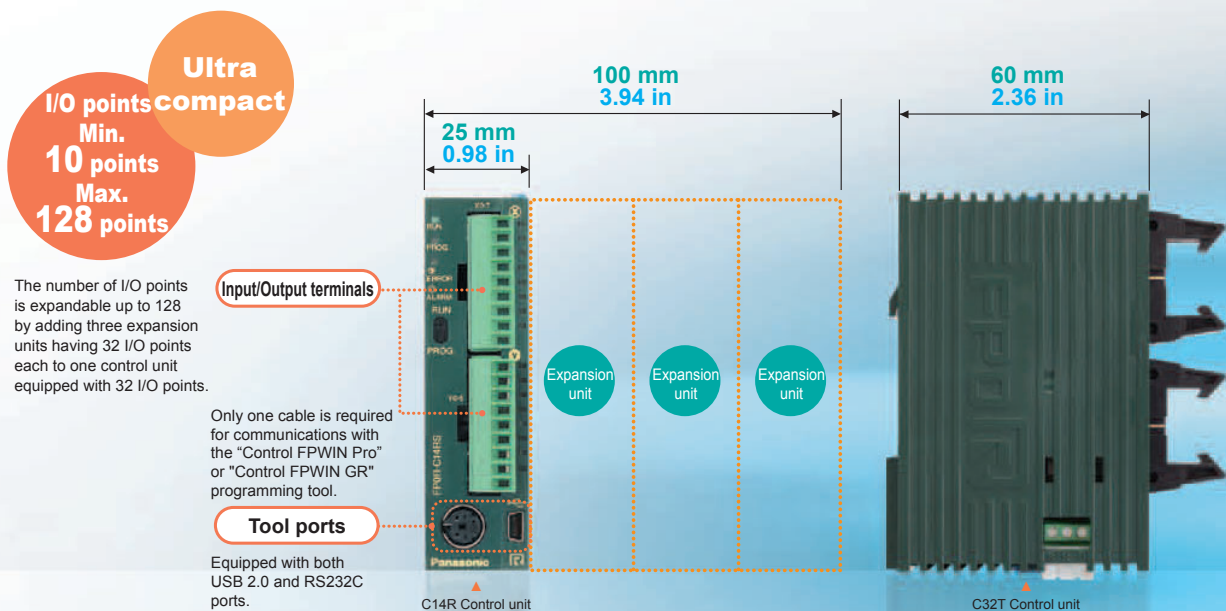

Multi-axis (4-axis) control is available without expansion units.

The built-in 4-axis pulse outputs allow multi-axis motor control without positioning units or other expansion units.

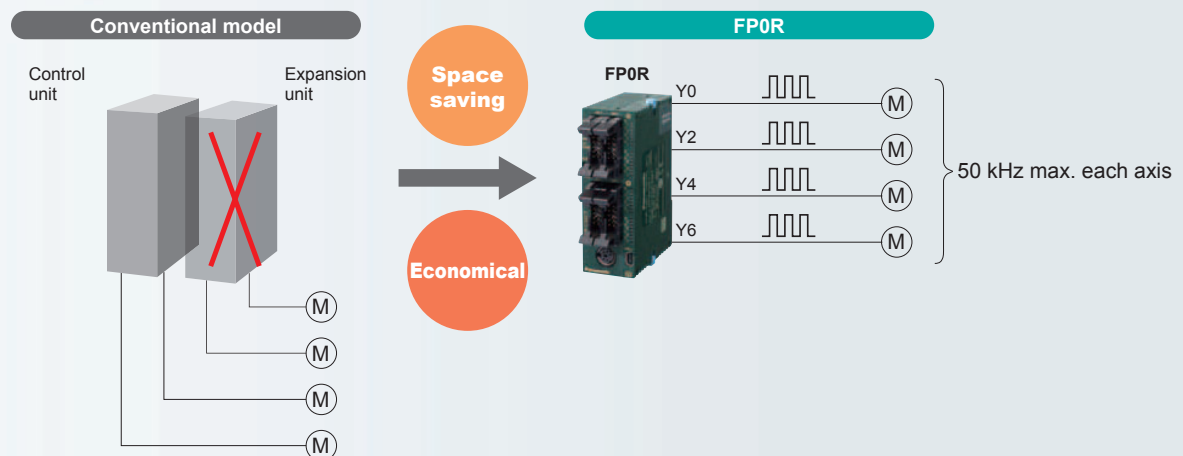

Outstanding Products



Worldwide simultaneous launch of the 3-year warranty
For details, visit the following website:
panasonic-denko.co.jp/ac/e/fasys/warranty

compact Models.

3.94 in.



NEW

Equipped with RS485 port

Up to 99 units can be connected, expanding applications for the eco-conscious business field.
The PLC link is available with up to 16 other FP series and FP0R units.

Fastest in its class *1

Ultra-high speed processing

Ultra-high speed: 80 ns/step (ST instructions)

* Within a range of 0 to 3,000 steps. Processing of the 3,001st and later steps is 580 ns, 1.5 times faster than the conventional model.

Note: Unit expansion increases the base time.

Base scan time: I/O refresh + base time
--

Without expansion units: 0.2 ms or less

With expansion units: 0.2 ms or less + (1 x Number of expansion units) ms

Industry's First *

Battery-less automatic backup of all data

The F type (FP0R-F32) has a built-in FeRAM, which is a cutting-edge device that allows the automatic saving of all data without a backup battery.

- There is no need to worry about data loss after a long vacation.
- Battery replacement is no longer necessary when shipping or transferring the unit overseas.
- Replacement of equipment and restoration of idle equipment is easy.
- The unit can be powered off flexibly on weekends or at other non-operating times, promoting energy saving.

* Based on our research as of July 1, 2011

Large capacity independent comment memory

Program maintenance and management become easier.

USB tool port provided as standard equipment

Programming work becomes simpler, easier, and quicker, improving the production efficiency.

Full-fledged positioning functions

A variety of dedicated instructions enable high-accuracy positioning.

Largest in its class *1

Large capacity program

Program capacity: 32 k steps *2

Data register: 32 k words *2


*1 Among compact PLCs with up to 128 I/O points based on our research as of July 1, 2011

*2 C10, C14 or C16 control unit: Program capacity of 16 k steps and data register of 12 k words

POSITIONING

Jog positioning control (F171 instruction)

The motion can be started without a preset target value. When a stop signal is input, the target value is set, and the motion is slowed to a stop.

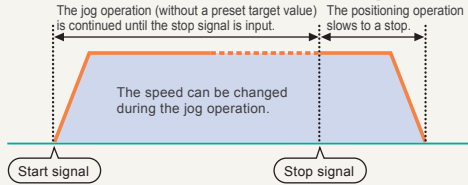


Useful for

- Labelers: Stopping the motion at a constant distance from the point where a label end detection signal is triggered
- Processing machines: Stopping the motion at a constant distance from the point where a processing object edge detection signal is triggered, and cut/drill the object

Changing the speed (available for F171 and F172 instructions)

The target speed can be changed by an external signal input during the jog operation or trapezoidal control operation.

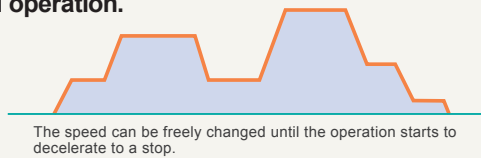


Useful for

- Speed synchronization of transfer or processing equipment.

Built-in 4-axis pulse outputs (Transistor output type)


Two sets can simultaneously undergo two-axis linear interpolation.

No complicated speed calculation or programming is required. Two-axis linear interpolation is available by using the F175 dedicated instruction. Two sets such as two X-Y tables, for example, can be simultaneously controlled.

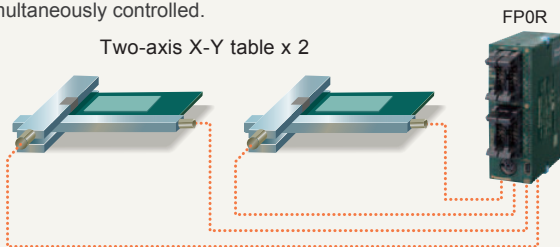

Built-in multipoint PWM outputs (4 channels)


The pulse output port of FP0R can also serve as a PWM output port. One of the application examples is an analog voltage output, which can be used for inverter speed control.

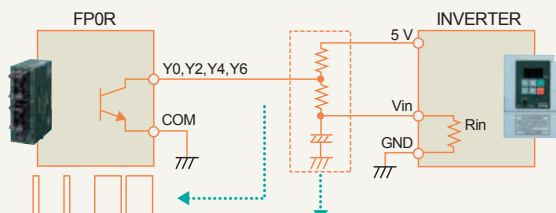

The unit can also serve as an analog voltage output when a smoothing capacitor is inserted in the circuit.

Individual settings for acceleration and deceleration (available for F171, F172, and F174 instructions)

The acceleration time and deceleration time can be individually set.

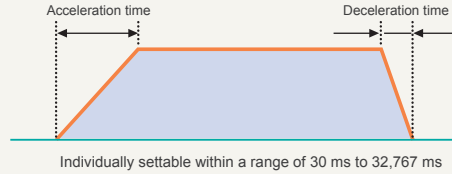


Useful for

- Labelers: Starting the operation at a relatively low acceleration to prevent tape from breaking
- Lifts: Optimizing the acceleration and deceleration during ascending and descending transfers.

Measuring the pulse frequency (F178 instruction)

Pulses input in a specified period by a single instruction are counted, and the frequency is calculated.

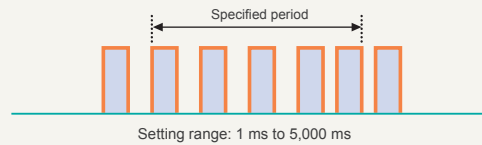


Useful for

- Detection of motor rotation speed for encoder feedback control

High-speed counters and pulse outputs

Ladder programs can be combined to create an application for counting pulse signals from the encoder through the high-speed counter input and adjusting the pulse output frequency based on the count to synchronize the slave axis speed with the master axis speed.


In the right-hand figure, the speed of conveyor 1, which is inverter-controlled, is measured based on the encoder pulse count, and pulses are output to the slave motor (for jog operation) according to the measured speed in order to synchronize the speed of conveyor 2.

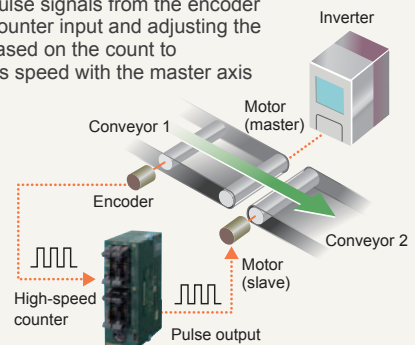

NETWORK

■ PLC link (MEWNET-W0)

Contact data can be shared among up to 16 PLC units, including FP0R, FPΣ, FP-X, FP2/FP2SH, and a mixture of them, without the need for programs.




Application examples

Use two FP0R units to control the assembly and transfer sections of a small machine respectively, connect them via the PLC link, and share one display

RS485

Up to 16 units connectable

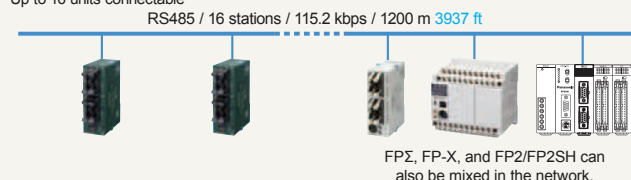


Application examples

Management of manufacturing line operations

■ RS485 serial communication


Compatible with both Modbus master and slave RTU.

This feature expands applications for the eco-conscious business field, and is ideal for the control of air conditioners, temperature, and electrical power.

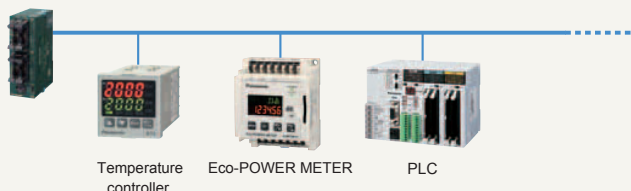


• Up to 99 units can be connected.

When 17 or more FP series units need to be linked, you can link up to 99 units by using the Modbus function instead of MEWNET-W0. Since each FP0R unit can be either a master or a slave, a multi-master link can be created by passing a token from a user program.

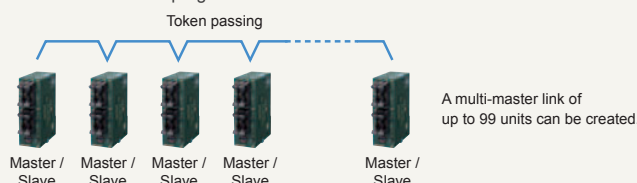

■ CC-Link slave unit

This unit is compatible with CC-Link, which is an open network, and capable of reading/writing four-word data through a maximum of 16 input and 16 output points.

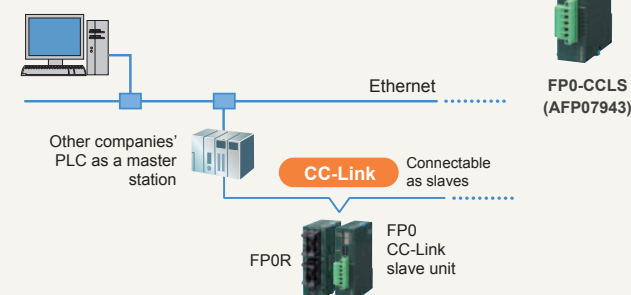


■ FP Web-Server2

The FP0R operation status can be monitored on a Web browser.

The FP0R operation status can be monitored on a Web browser by connecting FP Web-Server2 and FP0R via RS232C and making required settings using dedicated software (FP Web Configurator Tool 2).



FP Web-Server 2 (AFP0611)

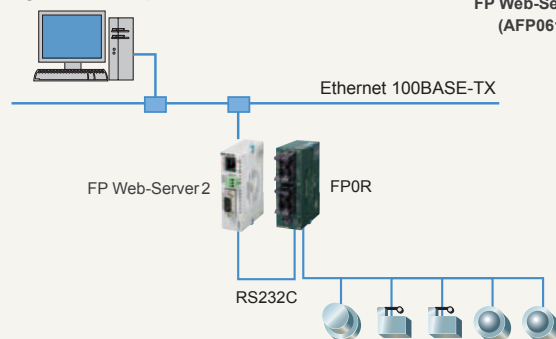


■ RS232C general-purpose serial communications

The control unit has an RS232C port for serial communications.


The RS232C port allows for direct connection to an operation display panel or a PC. Also, it facilitates bi-directional data communications with bar-code readers and other RS232C devices.

* The port block has S, R, and G terminals for connection.
Operation display panels can also be connected to the tool port.
* Both the relay output and transistor output types of control unit equipped with an RS232C port are available.

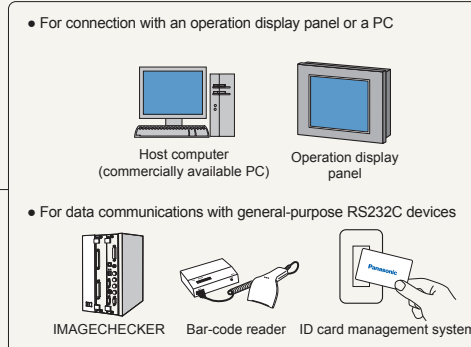

■ I/O link unit

This link unit enables FP0R to serve as a slave station of MEWNET-F (remote I/O system) and exchange I/O data from 32 input points and 32 output points with a master station without the need for programs.

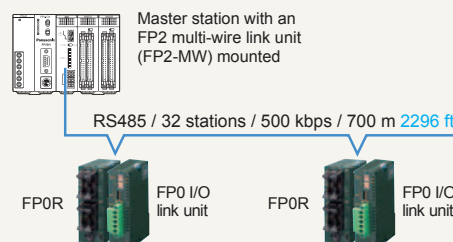


FP0-IOL (AFP0732)

OTHER USEFUL FUNCTIONS

Program protection

Program upload protection setting

User programs can be protected from unauthorized copying by disabling program upload using our software, FPCWIN. This function is useful for users who manage original programs on a PC.

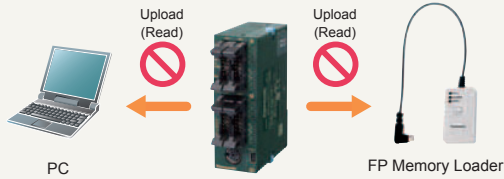

Eight-character password

Since uppercase and lowercase alphanumeric characters can be used, there are approx. 218 trillion possible password combinations. If an incorrect password is entered three times in a row, a cold reboot is required. This function is useful for users who upload programs from FP0R.

Temperature controller

- A temperature control program can be written in only one line by using a PID instruction (F356 EZPID), facilitating temperature control programming by a PLC, which had previously been considered difficult.
- The total accuracy is $\pm 0.8^{\circ}\text{C}$ $\pm 33.44^{\circ}\text{F}$ (K, J and T range). Two types are available: 4-channel and 8-channel types. Up to three units can be connected, allowing high-accuracy multi-point PID control of a maximum of 24 channels.

Thermocouple unit



4ch AFP0420 (FP0-TC4) 8ch AFP0421 (FP0-TC8)

Built-in real-time clock (T type only)


The clock allows for year, month, day, hour, minute, and second data processing. The clock data can be linked to periodic monitoring of production data and operation status, and the management of error history records.

Interrupt input

This function takes in input signals at high speed regardless of the scan time and instantly executes the interrupt program. This is useful for high-accuracy positioning control or control of defective item ejector valves. The X0 to X7 inputs can be designated as interrupt inputs (C10: X0 to X5).

Pulse catch

This function can take in 10 μs short pulse inputs and is therefore ideal for taking in signals from a sensor to detect small components.



The X0 to X7 inputs can be designated as pulse catch inputs.

Analog I/O

The lineup includes a compact analog I/O unit with one analog output and two analog input channels, an A/D converter unit with eight analog input channels, and a D/A converter unit with four analog output channels. Communication using up to 24 channels is possible. Both the compact body size and the high input/output resolution of 1/4,000 (12 bits) have been achieved. The DIP switches in the unit cover a variety of input/output ranges and are user-friendly.



Analog I/O unit
Input: 2ch / Output: 1ch



AFP0480 (FP0-A21)

A/D converter unit
Input: 8ch



AFP0401 (FP0-A80)

D/A converter unit
Voltage output: 4ch



AFP04121 (FP0-A04V)

D/A converter unit
Current output: 4ch



AFP04123 (FP0-A04I)

EEPROM data saving (F12 and P13 instructions)


All FP0R series models are equipped with EEPROM, which can electrically rewrite data and retain data without the need for voltage supply. Setting data and production result data can be written and saved by the P13 instruction, and read out by the F12 instruction when necessary.



Note: Each block is limited to 10,000 write operations.

Program download in RUN mode (Comment writable)



Even while the equipment is operating with FP0R in RUN mode, a whole program edited offline can be downloaded to FP0R, and comments can be written simultaneously. Programs can be changed without stopping a running production line.

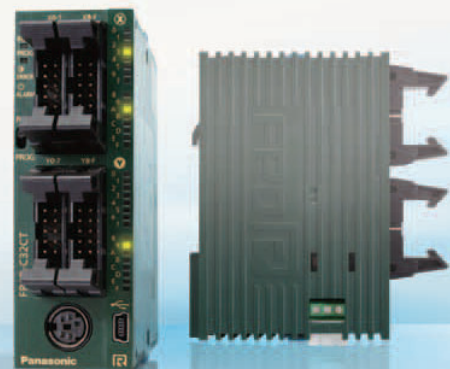

PROGRAMMING SOFTWARE

Control FWIN Pro (IEC61131-3 compliant Windows version software)

Compliant with international standard IEC61131-3
Programming software approved by PLC Open

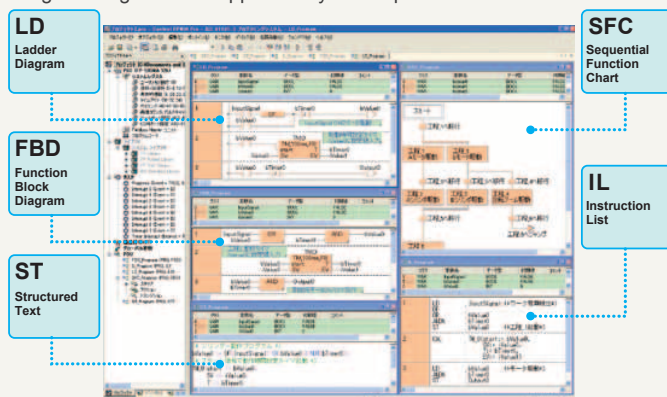


• Programming in the language most suited to the process

Easy-to-understand, efficient programs can be created, for example, by using a ladder program for machine control or ST for communications control.

• Programming in the language you are good at

Programming time can be greatly reduced by the easy ability to split and then integrate programming for each function and process.

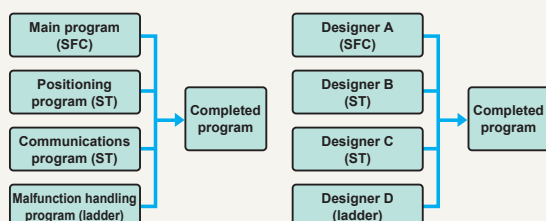

Features

1. Five programming languages can be used.

Programming can be done using the language most familiar to the developer or using the language most suited to the process to be performed. High-level (structured text) languages that allow structuring, such as C, are supported.

2. Easy to reuse well-proven programs

Efficiency when writing programs has been greatly increased by being able to split programming up for each function and process using structured programming.

3. Keep know-how from getting out

By "black boxing" a part of a program, you can prevent know-how from leaking out and improve the program's maintainability.

4. Uploading of source programs from PLC possible.

Maintainability increased by being able to load programs and comments from the PLC.

5. Programming for all models in the FP series possible.

Operational Environment * FPO is compatible with Ver. 6.1 or later.

OS	Windows 2000/XP/Vista/7 (Note)
Hard disk capacity	At least 120 MB
CPU	Pentium III processor (700 MHz) or compatible
Onboard memory	At least 256 MB RAM or more
Screen resolution	At least 1,024 x 768
Display colors	High Color (16-bit) or higher
Applicable PLC	FP0R/FP0/FPΣ/FP-X/FP-e/FP2SH

Note: Only Ver. 6.2 or later is compatible with Windows 7. (To be released in September 2011)


Control FWIN GR (Windows version software)

The ladder programming software for FP series Highly operational software tool for maximizing convenience in the field

Program status display

Tool bar

Access often-used functions using icons.

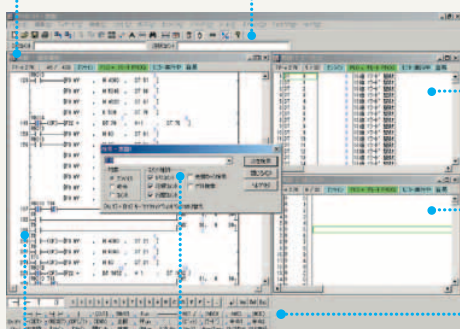

Data monitoring window

Relay monitoring window

Program display

Search window

Allows you to search various data

Function bar

Buttons for instruction input and confirmation, on-line/off-line selection and PLC mode selection.

Features

1. Easy field operations not requiring the use of a mouse for data entry, search, writing, monitoring and timer changes, all carried out only from the keyboard.

2. All FP series PLCs are supported.

3. Easy programming with wizard functions.

4. Communication with GTWIN and PCWAY simultaneously through the same port.

5. A simulation function is available.









Operational Environment * FPO is compatible with Ver. 2.8 or later.

OS	Windows 98/Me/2000/XP/Vista/7 (Note)
Hard disk capacity	At least 40 MB
CPU	Pentium 100 MHz or higher
Onboard memory	At least 64 MB (depends on OS)
Screen resolution	At least 1,024 x 768
Display colors	High Color (16-bit) or higher
Applicable PLC	FP0R/FP0/FPΣ/FP-X/FP-e/FP2SH












Note: Only Ver. 2.90 or later is compatible with Windows 7.

PART NUMBER LIST

Control units

10 points Input: 6, Relay output: 4 Terminal block type  AFP0RC10RS (with RS232C) AFP0RC10CRS (with RS485) AFP0RC10MRS	10 points Input: 6, Relay output: 4 Connector type  AFP0RC10RM (with RS232C) AFP0RC10CRM	14 points Input: 8, Relay output: 6 Terminal block type  AFP0RC14RS (with RS232C) AFP0RC14CRS (with RS485) AFP0RC14MRS	14 points Input: 8, Relay output: 6 Connector type  AFP0RC14RM (with RS232C) AFP0RC14CRM
16 points Input: 8, Transistor output: 8 MIL connector type  AFP0RC16T AFP0RC16P (with RS232C) AFP0RC16CT AFP0RC16CP (with RS485) AFP0RC16MT AFP0RC16MP	32 points Input: 16, Transistor output: 16 MIL connector type  AFP0RC32T AFP0RC32P (with RS232C) AFP0RC32CT AFP0RC32CP (with RS485) AFP0RC32MT AFP0RC32MP	32 points Input: 16, Transistor output: 16 MIL connector type  T type (with RS232C) AFP0RT32CT AFP0RT32CP (with RS485) AFP0RT32MT AFP0RT32MP	32 points Input: 16, Transistor output: 16 MIL connector type  F type (with RS232C) AFP0RF32CT AFP0RF32CP (with RS485) AFP0RF32MT AFP0RF32MP






Expansion units

8 points Input: 8 MIL connector type  AFP0RE8X	8 points Input: 4, Relay output: 4 Terminal block type  AFP0RE8RS Connector type  AFP0RE8RM	8 points Relay output: 8 Terminal block type  AFP0RE8YRS	8 points Transistor output: 8 MIL connector type  AFP0RE8YT AFP0RE8YP	32 points Input: 16, Transistor output: 16 MIL connector type  AFP0RE32T AFP0RE32P
16 points Input: 16 MIL connector type  AFP0RE16X	16 points Transistor output: 16 MIL connector type  AFP0RE16YT AFP0RE16YP	16 points Input: 8, Transistor output: 8 MIL connector type  AFP0RE16T AFP0RE16P	16 points Input: 8, Relay output: 8 Terminal block type  AFP0RE16RS Connector type  AFP0RE16RM	

Intelligent units





Units in common with FP0

Contact Ramco for information on New & Improved analog units

Analog I/O unit Input: 2 ch, Output: 1 ch Discontinued  Part number: AFP0480 Product number: (FP0-A21)	A/D converter unit Input: 8 ch Discontinued  AFP0401 (FP0-A80)	D/A converter unit Voltage output: 4 ch Discontinued  AFP04121 (FP0-A04V)	D/A converter unit Current output: 4 ch Discontinued  AFP04123 (FP0-A04I)	Thermocouple unit  (4 ch) AFP0420 (FP0-TC4) (8 ch) AFP0421 (FP0-TC8)
--	--	---	---	---



Link and Communication units

Units in common with FP0

I/O link unit  Part number: AFP0732 Product number: (FP0-IOL)	CC-Link slave unit  AFP07943 (FP0-CCLS)	KS1 Signal converter  AKS1202	FP Web-server 2 Unit  AFP0611 (FP-WEB2)
--	--	---	--

Power supply unit and others

Units in common with FP0

Power supply unit Input: 100 to 240 V AC, Output: 24 V DC, 0.7 A  Part number: AFP0634 Product number: (FP0-PSA4)	FP memory loader  Data clear type: AFP8670 Data hold type: AFP8671 * FP0R is compatible with Ver. 2.0 or later.
--	---

Panasonic

For technical / applications support
on FP0R Analog units

Contact Ramco Innovations today!

FP0R SERIES Programmable Controller

Makeover for FP0R Analog Units



Greatly Improved Performance, Extended Functions



NEW

Analog Input Unit
Input: 4 channels

AFP0RAD4



NEW

Analog Input Unit
Input: 8 channels

AFP0RAD8



NEW

Analog Output Unit
Output: 4 channels

AFP0RDA4



NEW

Analog I/O Unit
Input: 2 channels / Output: 1 channel

AFP0RA21



NEW

Analog I/O Unit
Input: 4 channels / Output: 2 channels

AFP0RA42



Higher resolution: 14 bits (previously 12 bits)

Higher resolution: 12 bits → 14 bits (analog input, output)
Higher precision: $\pm 0.6\%$ → $\pm 0.2\%$ (at 25 °C 77 °F)
Achieve high-resolution analog control in applications such as film winding, tension control, winding speed control, and other operations.



Enables move to multi-channel systems and optimization

Up to 8-channel input: Easier transition to multi-channel systems
And, with free combination of input/output, systems can be optimized.



Select among 5 input ranges and 6 output ranges

Five selectable input settings: $\pm 10\text{ V}$, $\pm 5\text{ V}$, 0 to $+10\text{ V}$, 0 to $+5\text{ V}$, 0 to 20 mA
Sixth output setting: $\pm 10\text{ V}$, $\pm 5\text{ V}$, 0 to $+10\text{ V}$, 0 to $+5\text{ V}$, 0 to 20 mA, 4 to 20 mA
With $\pm 10\text{ V}$ support it is even possible to control the rotation of motors.



Easy backward compatibility


Use compatibility mode to retain existing ladder programming.
You can use a DIP switch to enable compatibility mode, which allows operation at 12-bit resolution (using program resources).



Can also be used with other PLCs outside the FP0R series

Use in connection with FPΣ, FP-X, and FP-X0 series PLCs is possible.

panasonic.net/id/pidsx/global
2015.06

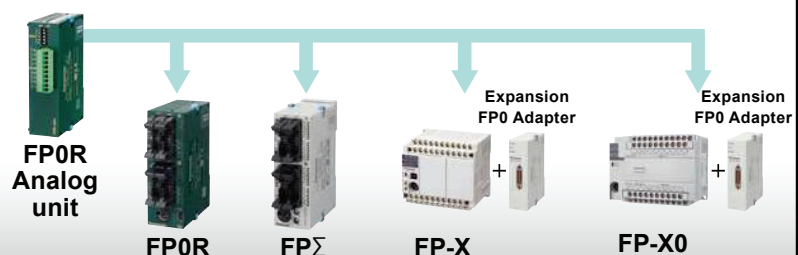

FP0R series Control unit Features

- **Large capacity program/data memory**
Program capacity: 32 k steps max., Data register: 32 k words max.
- **USB tool port provided as standard equipment**
Capable of high-speed program transfer with USB 2.0
- **Battery-less automatic backup of all data**
The F type has a built-in FeRAM, industry's first, that allows the automatic saving of all data without a backup battery.
- **Ultra-high speed processing**
80 ns / step (ST instruction)
* Within a range of 0 to 3,000 program steps
- **Multi-axis control available without expansion units**
Built-in pulse outputs for four axes (50 kHz max. each)

SPECIFICATIONS

Product name		Analog input units		Analog I/O units (Only input section)	
Item	Part No.	AFP0RAD4	AFP0RAD8	AFP0RA21	AFP0RA42
Number of input / output channels		4 / 0	8 / 0	2 / 1	4 / 2
Input range (digital input range)	Voltage	-10 to +10 V 14 bits (-8,000 to +8,000) -5 to +5 V 14 bits (-8,000 to +8,000) 0 to +10 V 14 bits (0 to +16,000) 0 to +5 V 14 bits (0 to +16,000)			
	Current	0 to 20 mA 14 bits (0 to +16,000)			
Absolute maximum input	Voltage	±15 V			
	Current	±30 mA			
Input impedance	Voltage	1 MΩ approx.			
	Current	250 Ω approx.			
Max. resolution		14 bits (1/16,000)			
Overall accuracy	Voltage	±0.2 % F.S. or less (at +25°C +77°F) ±0.4 % F.S. or less (at 0 to +50°C +32 to +122°F)			
	Current	±0.3 % F.S. or less (at +25°C +77°F) ±0.6 % F.S. or less (at 0 to +50°C +32 to +122°F)			
Conversion speed		2 ms/all channels			
Other functions		Averaging processing (moving, number of times) Compatibility function for existing programs (12 bits)			
Insulation method	Between input terminals and internal circuit	Photocoupler and isolated DC/DC converter			
	Between channels	Not insulated			

Product name		Analog output unit	Analog I/O units (Only output section)	
Item	Part No.	AFP0RDA4	AFP0RA21	AFP0RA42
Number of input / output channels		0 / 4	2 / 1	4 / 2
Output range (analog output setting range)	Voltage	-10 to +10 V 14 bits (-8,000 to +8,000) -5 to +5 V 14 bits (-8,000 to +8,000) 0 to +10 V 14 bits (0 to +16,000) 0 to +5 V 14 bits (0 to +16,000)		
	Current	0 to 20mA 14 bits (0 to +16,000) 4 to 20mA 14 bits (0 to +16,000)		
Output impedance	Voltage	0.5 Ω or less		
Max. output current	Voltage	±10 mA		
Permissible output load resistance	Current	500 Ω or less		
Max. resolution		14 bits (1/16,000)		
Overall accuracy	Voltage	±0.2 % F.S. or less (at +25°C +77°F) ±0.4 % F.S. or less (at 0 to +50°C +32 to +122°F)		
	Current	±0.3 % F.S. or less (at +25°C +77°F) ±0.6 % F.S. or less (at 0 to +50°C +32 to +122°F)		
Conversion speed		500 μs/all channels		
Other functions		Compatibility function for existing programs (12 bits)		
Insulation method	Between the output terminals and internal circuit	Photocoupler and isolated DC/DC converter		
	Between channels	Not insulated		

PRODUCT TYPES

Product name	Number of channels	Part No.
FP0R Analog input unit	Input: 4 channels	AFP0RAD4
FP0R Analog input unit	Input: 8 channels	AFP0RAD8
FP0R Analog I/O unit	Input: 2 channels / Output: 1 channel	AFP0RA21
FP0R Analog I/O unit	Input: 4 channels / Output: 2 channels	AFP0RA42
FP0R Analog output unit	Output: 4 channels	AFP0RDA4


PREVIOUS MODEL SUBSTITUTION TABLE

Analog type	Previous model	New model
Input	—	AFP0RAD4
	AFP0401	AFP0RAD8
Output	Voltage	AFP0RDA4
	Current	
Input / Output	AFP0480	AFP0RA21
	—	AFP0RA42


DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

AFP0RAD4 AFP0RA21 Analog unit

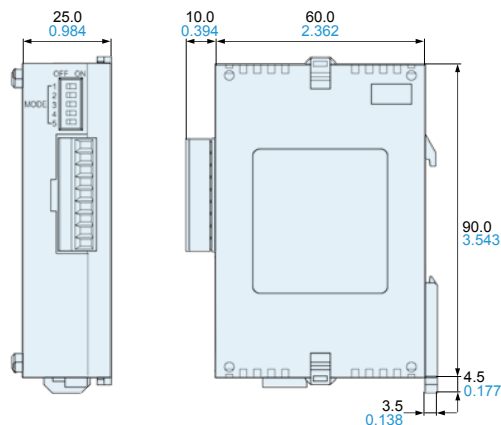

AFP0RAD8 AFP0RDA4 AFP0RA42 Analog unit

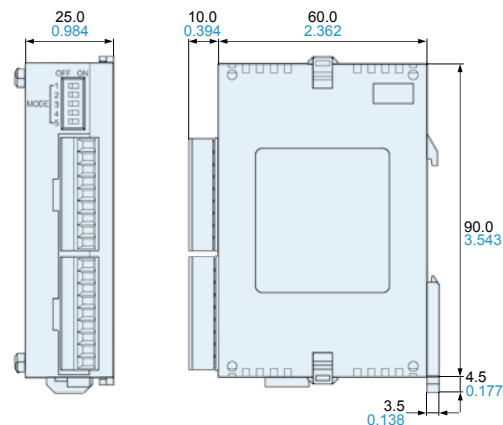

INSTALLATION AND OPTIONS

■ Installation

The control unit width is only 25 mm 0.98 in*. Even when expanded to allow for 128 I/O points, the total width is only 105 mm 4.13 in.

The control unit is pocket-sized: W 25 x H 90 x D 60 mm **W 0.98 x H 3.54 x D 2.36 in.**

The number of I/O points can be expanded up to 128. Even with the maximum expansion, the size is only W 105 x H 90 x D 60 mm **W 4.13 x H 3.54 x D 2.36 in.** The ultra-compact body size and installation area facilitate the miniaturization of target machines, equipment, and control panels.


* The 32 I/O points type control unit is 30 mm 1.18 in in width.

• Three options for installation methods

The control unit can be directly mounted on a panel by using the optional flat type mounting plate.



DIN rail



Slim type mounting plate




Flat type mounting plate*

* Cannot be used when expanded.

Up to three expansion units can be directly connected without connection cables.

The expansion units can be directly connected to the control unit with a simple operation using the expansion connector and lock lever on the side of the unit. Dedicated cables or backplanes are not necessary for expansion.

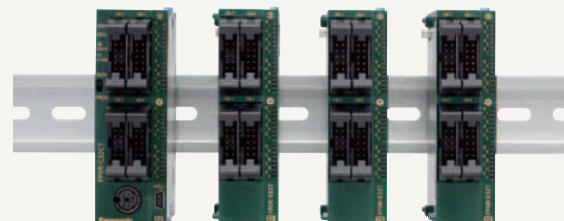

Control unit Expansion unit Expansion unit Expansion unit (Up to 3 units can be expanded.)

A terminal block type and a connector type are available. Both can be detached for easy wiring.

■ Options

• Wiring tools



Terminal screwdriver

Necessary when wiring relay output type and terminals block (Phoenix).

Part number: **AFP0806**



Molex connector pressure contact tool

Necessary when wiring relay output type and molex connectors.

Part number: **AFP0805**



Multi-wire connector pressure contact tool

Necessary when wiring transistor output type connectors.

Part number: **AXY52000FP**

• Parts for mounting



FP0 Slim type mounting plate

Screw-stop attachment plate, Slim model

Part number: **AFP0803** (including 10 pieces)




Flat type mounting plate

Screw-stop attachment plate, Flat model

Part number: **AFP0804** (including 10 pieces)

• I/O cables



Relay output molex type I/O cable

Loose-wiring cable (9 leads) with molex socket attached at one end, AWG20, 0.5 mm², 1 set: 2 cables (blue & white)

< Length: 1 m 3.28 ft > 2 cable set

Part number: **AFP0551**

< Length: 3 m 9.84 ft > 2 cable set

Part number: **AFP0553**



Transistor output type I/O cable

Loose-wiring cable (10 leads) with connectors attached at one end, AWG22, 0.3 mm², 1 set: 2 cables (blue & white).

< Length: 1 m 3.28 ft > 2 cable set

Part number: **AFP0521**

< Length: 3 m 9.84 ft > 2 cable set


Part number: **AFP0523**

• Flat cable connector set (10 leads)

Part number: **AFP0808** (including 4 pieces)

Notes: 1) One I/O cable set (2 cables) is necessary with the following models: C10RS / C10RM, C14RS / C14RM, E8RS / E8RM, E16RS / E16RM
2) One I/O cable set (2 cables) is necessary with the following models: C16T / E16X, E16T / E16YT
3) Two I/O cable sets (total 4 cables) are necessary with the following models: C32T / E32T

• Maintenance parts



Terminal socket

Attaches to relay output and terminal block types.

Part number: **AFP0802** (2 sokets per pack)



Molex socket

Attaches to relay output and molex connector types.

Part number: **AFP0801** (2 sokets per pack)



Wire-press socket

Attaches to transistor output type.

Part number: **AFP0807** (2 sokets per pack)



FP0R Power cable (Length: 1 m 3.28 ft)

Attaches to FP0R control unit.

Part number: **AFP0805** (1 cable per pack)

OPTIONS

■ OPTIONS

● RT-3 unit relays (Power PhotoMOS relay type)



RT-3 unit relay

Contact arrangement	Type	Rated input voltage	RT-3 Unit relay		
			Product No.	Part No.	Packing quantity
1 Form A × 4	DC only (equipped with AQZ102)	12 V DC	RT3SP1-12V	AY34001	Inner carton: 1 piece Outer case: 20 pieces
		24 V DC	RT3SP1-24V	AY34002	
	AC / DC dual use (equipped with AQZ204)	12 V DC	RT3SP2-12V	AY35001	
		24 V DC	RT3SP2-24V	AY35002	

Notes: 1) Only for use with Power PhotoMOS relays. Cannot be equipped with PA relays.
2) Please consult us other contact arrangement.

● RT-3 unit relays (PA relay type)




RT-3 unit relay

Contact arrangement	Rated input voltage	RT-3 Unit relay		
		Product No.	Part No.	Packing quantity
1 Form A × 4	12 V DC	RT3S-12V	AY33001	Inner carton: 1 piece Outer case: 20 pieces
	24 V DC	RT3S-24V	AY33002	

Notes: 1) Only for use with PA relay type. Cannot be equipped with Power PhotoMOS relay standard type. However, equipping with voltage sensitive type is possible.
2) 5 V DC type relays are also available. Please consult us.
3) Please consult us other contact arrangement.

● 4-point terminals




4-point terminals

Type	Rated input voltage	Part No.
PA relay and Voltage sensitive type power PhotoMOS relay type	12, 24 V DC	AY30000

Packing quantity: inner carton: 1 piece, outer case: 20 pieces


Mountable relays for 4-point terminal



Product name	Part No.
PA relay	APA3311 and APA3312
Power PhotoMOS relay (voltage sensitive type)	AQZ10*D (DC only)
	AQZ20*D (AC / DC dual use)

Note: Never mount relays into this product other than those given above.
Doing so will cause malfunction, breakdown, and breakdown of the connected product.

● RT-2 relay terminals



DIN rail mounting type

1. Pressure connector connect type

I / O type	Rated voltage	Product No.	Part No.	Packing quantity
Input device	12 V DC	RT2S-ID16-12V	AY231501	Inner carton: 1 piece Outer case: 10 pieces
	24 V DC	RT2S-ID16-24V	AY231502	
Output device	12 V DC	RT2S-OD16-12V	AY232501	
	24 V DC	RT2S-OD16-24V	AY232502	

2. Wire-direct connect type

I / O type	Rated voltage	Product No.	Part No.	Packing quantity
Input device	12 V DC	RT2S-C-ID16-12V	AY231511	Inner carton: 1 piece Outer case: 10 pieces
	24 V DC	RT2S-C-ID16-24V	AY231512	
Output device	12 V DC	RT2S-C-OD16-12V	AY232511	
	24 V DC	RT2S-C-OD16-24V	AY232512	

■ OPTIONS

● Cables

Expansion cable with wire-pressed terminal









Expansion cable



M type 16-point, 34-pin output cable



Connecting cables for FP series and Interface terminal

Product name	Controller side unit	No. of connector contacts of controller side	Interface terminal	Connecting cable							
				Product name and shape	Length (Part number)						
250 mm 9.84 in	500 mm 19.69 in	1,000 mm 39.37 in	1,500 mm 59.06 in		2,000 mm 78.74 in	3,000 mm 118.11 in	5,000 mm 196.85 in				
FP0 FP0R FPΣ	8 points Input unit	Input side: 10-pin	RT-2 relay terminal RT-1 PC relay terminal	For FP0 and FP0R 8-point input 	-	-	AY15013	AY15014	AY15015	AY15016	AY15017
	16 points Input unit	Input side: 10-pin × 2	RT-2 relay terminal RT-1 PC relay terminal	For FP0, FP0R and FPΣ 16-point input 	-	-	AY15913	AY15914	AY15915	AY15916	AY15917
	8 points Output unit	Output side: 10-pin	RT-2 relay terminal RT-1 PC relay terminal	For FP0 and FP0R 8-point output 	-	-	AY15023	AY15024	AY15025	AY15026	AY15027
	16 points Output unit	Output side: 10-pin × 2	RT-2 relay terminal RT-1 PC relay terminal	For FP0, FP0R and FPΣ 16-point output 	-	-	AY15923	AY15924	AY15925	AY15926	AY15927
	16 points I/O unit	I/O side: 20-pin	Connector terminal	 20P	-	AYT52202	AYT52203	AYT52204	AYT52205	AYT52206	AYT52207
	64 points I/O unit	I/O side: 40-pin	RT-2 relay terminal RT-1 PC-relay terminal / S type	For FPΣ 64-point I/O unit  Controller side 32 points 16 points 16 points 20-pin 20-pin } Terminal side	-	-	AY15633	AY15634	AY15635	AY15636	AY15637

(Standard packing: carton: 1 pc., Case: 10 pcs.)


Expansion cables with wire-pressed terminal for relay terminal

Product name and shape	I/O type	Relay terminal	Length (Part number)				
			1,000 mm 39.37 in	1,500 mm 59.06 in	2,000 mm 78.74 in	3,000 mm 118.11 in	5,000 mm 196.85 in
Expansion cable with wire-pressed terminal 	16-point both input and output	RT-2 relay terminal RT-1 PC relay terminal / S type	AY15853	AY15854	AY15855	AY15856	AY15857

Note: Please consult us regarding connecting cables for the various controllers. Regarding the expansion cables with wire-pressed terminal, the triangle mark does not correspond to wire No. 1, so be sure to inquire for details.

● WAGO DIO Station

For Easy and Secure Connection Between FP0R and a Sensor

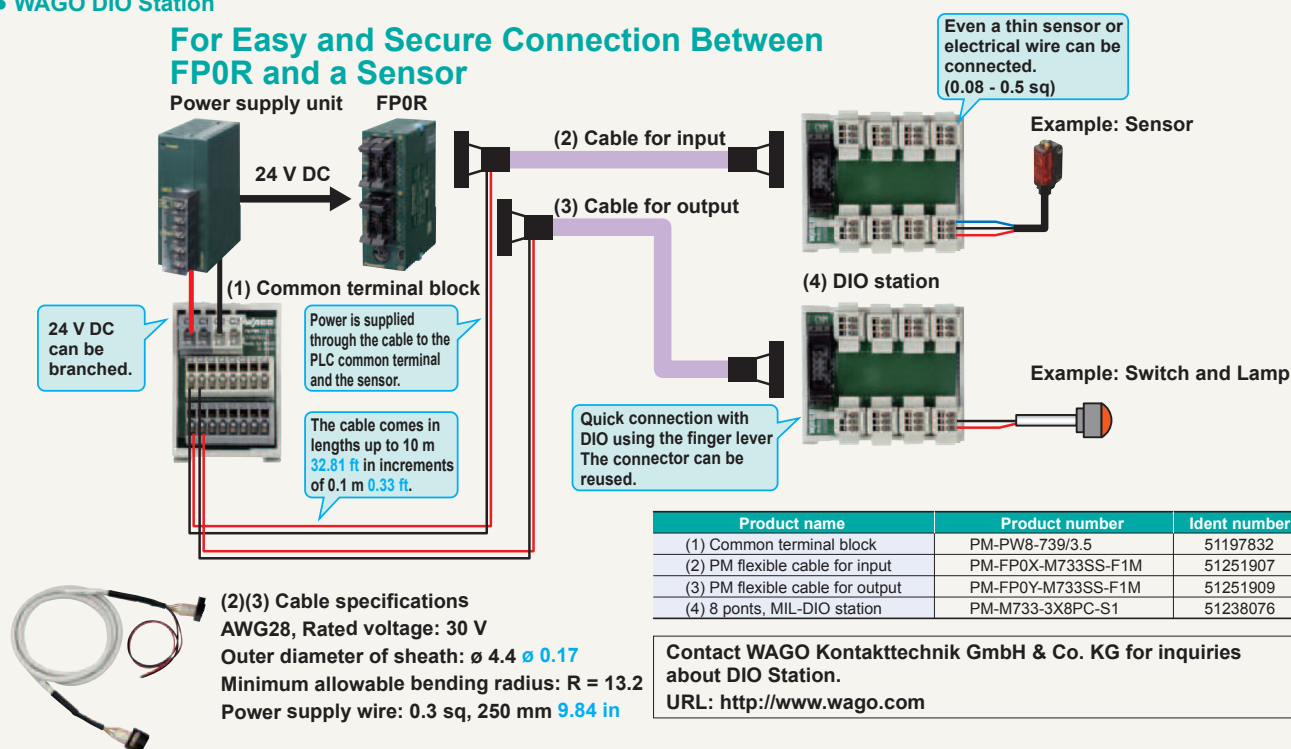

COMPATIBILITY

Compatibility between FP0 and FP0R

Programs

FP0R has an "FP0-compatible mode". This mode provides conditions for functions, memory areas, system registers, etc. identical to those of FP0. If programs in FP0 are transported to FP0R, FP0R can function identically as FP0 did (with some exceptions described below).


Installation

The shape, outside dimensions, installation method, and the connector pin arrangement are identical to those of FP0.

This high degree of compatibility ensures easy and worry-free replacement of FP0 with FP0R even if the device or machine to be manufactured is identical.

- It is recommended that Control FWIN Pro or FWIN GR should be used for transporting FP0 programs to FP0R.

Before an FP0 program is downloaded to FP0R, a message stating "Switch to FP0-compatible mode for the download?" appears. If "Yes" is chosen, FP0R will automatically be set in FP0-compatible mode.

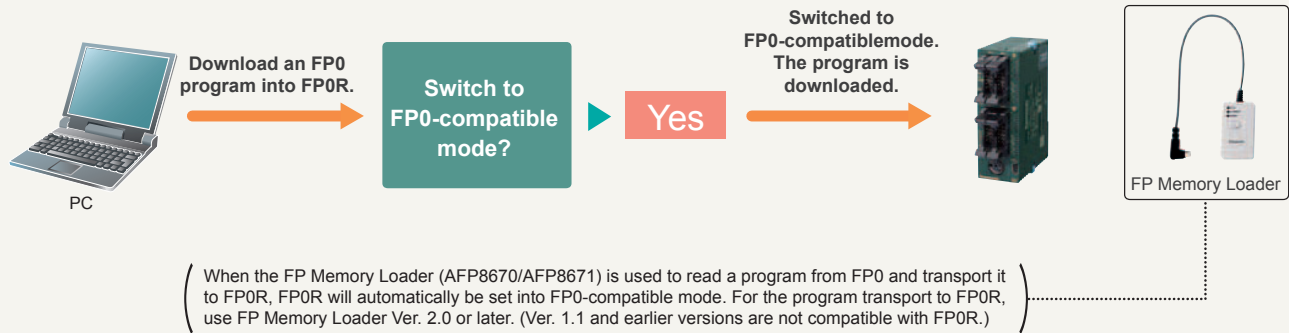

- FP0 specification items not covered by FP0-compatible mode (See "FP0R User's Manual" for details.)

Item	FP0	FP0R (FP0-compatible mode)
Instruction P13: EEPROM write time	5 ms / block (256 blocks max.: 1,280 ms)	100 ms in units of 32 blocks (256 blocks max.: 800 ms) * Writing even only one block takes 100 ms.
Instruction F170: PWM output frequency range	0.15 Hz to 1 kHz	6 Hz to 1 kHz
High-speed counter/pulse output elapsed value	± 24 bits	± 32 bits
Instruction F168: Home return	The elapsed value is not counted during home return.	The elapsed value is counted during home return.
Instruction F169: Pulse output	"Non-counting mode" selectable	Counted and added even when "non-counting mode" is selected
Instruction F144: Serial data communications	Transmittable data size: Unlimited	Transmittable data size: 2,048

Note: The F type has no compatible functions because it does not correspond to any units of the conventional FP0 series.

■ Control unit replacement table

FP0

→ FP0R

Product name	Product No.	Part No.		Product name	Part No.
FP0-C10 Control unit	FP0-C10RS	AFP02123	Order receiving will be discontinued in August 2012.	FP0R-C10 Control unit	AFP0RC10RS
	FP0-C10RM	AFP02113			AFP0RC10RM
FP0-C10 Control unit with RS232C port	FP0-C10CRS	AFP02123C		FP0R-C10 Control unit with RS232C port	AFP0RC10CRS
	FP0-C10CRM	AFP02113C			AFP0RC10CRM
FP0-C14 Control unit	FP0-C14RS	AFP02223		FP0R-C14 Control unit	AFP0RC14RS
	FP0-C14RM	AFP02213			AFP0RC14RM
FP0-C14 Control unit with RS232C port	FP0-C14CRS	AFP02223C		FP0R-C14 Control unit with RS232C port	AFP0RC14CRS
	FP0-C14CRM	AFP02213C			AFP0RC14CRM
FP0-C16 Control unit	FP0-C16T	AFP02343		FP0R-C16 Control unit	AFP0RC16T
	FP0-C16P	AFP02353			AFP0RC16P
FP0-C16 Control unit with RS232C port	FP0-C16CT	AFP02343C		FP0R-C16 Control unit with RS232C port	AFP0RC16CT
	FP0-C16CP	AFP02353C			AFP0RC16CP
FP0-C32 Control unit	FP0-C32T	AFP02543		FP0R-C32 Control unit	AFP0RC32T
	FP0-C32P	AFP02553			AFP0RC32P
FP0-C32 Control unit with RS232C port	FP0-C32CT	AFP02543C		FP0R-C32 Control unit with RS232C port	AFP0RC32CT
	FP0-C32CP	AFP02553C			AFP0RC32CP
FP0-T32 Control unit with RS232C port, clock / calendar function and 10 k type	FP0-T32CT	AFP02643C		FP0R-T32 Control unit with RS232C port and real clock / calendar function	AFP0RT32CT
	FP0-T32CP	AFP02653C			AFP0RT32CP
FP0-S-LINK Control unit with RS232C port	FP0-SL1	AFP02700		Continue to be available	
No corresponding models				FP0R-F32 Control unit with RS232C port	AFP0RF32CT AFP0RF32CP

■ Expansion unit replacement table

FP0

→ FP0R

Product name	Product No.	Part No.		Product name	Part No.
FP0-E8	FP0-E8X	AFP03003	Order receiving will be discontinued in August 2012.	FP0R-E8	AFP0RE8X
	FP0-E8RS	AFP03023			AFP0RE8RS
	FP0-E8RM	AFP03013			AFP0RE8RM
	FP0-E8YRS	AFP03020			AFP0RE8YRS
	FP0-E8YT	AFP03040			AFP0RE8YT
	FP0-E8YP	AFP03050			AFP0RE8YP
FP0-E16	FP0-E16X	AFP03303		FP0R-E16	AFP0RE16X
	FP0-E16RS	AFP03323			AFP0RE16RS
	FP0-E16RM	AFP03313			AFP0RE16RM
	FP0-E16T	AFP03343			AFP0RE16T
	FP0-E16P	AFP03353			AFP0RE16P
	FP0-E16YT	AFP03340			AFP0RE16YT
FP0-E32	FP0-E16YP	AFP03350			AFP0RE16YP
	FP0-E32T	AFP03543		FP0R-E32	AFP0RE32T
	FP0-E32P	AFP03553			AFP0RE32P

SPECIFICATIONS

■ Performance specifications (FP0R Control units)

Product type of FP0R control unit		C10 (Relay output type only)	C14 (Relay output type only)	C16 (Transistor output type only)	C32 (Transistor output type only)	T32 (Transistor output type only)	F32 (Transistor output type only)	
Programming method / Control method		Relay symbol / Cyclic operation						
Number of I/O points	No expansion (Control unit only)	10 points [Input: 6, Relay output: 4]	14 points [Input: 8, Relay output: 6]	16 points [Input: 8, Transistor output: 8]	32 points [Input: 16, Transistor output: 16]	32 points [Input: 16, Transistor output: 16]		
	With expansion 1 * Same type of control and expansion units	Max. 58 points	Max. 62 points	Max. 112 points	Max. 128 points	Max. 128 points		
	With expansion 2 * Mix type of relay and transistor units	Max. 106 points	Max. 110 points	Max. 112 points	Max. 128 points	Max. 128 points		
Program memory		EEPROM (no backup battery required)						
Program capacity		16 k steps				32 k steps		
Number of instructions	Basic	110 approx.						
	High-level	210 approx.						
Operation speed		Up to 3,000 steps Basic instructions: 0.08 μs Min. Timer instructions: 2.2 μs Min. High-level instructions: 0.32 μs (MV instruction) Min. 3,001st and later steps Basic instructions: 0.58 μs Min. Timer instructions: 3.66 μs Min. High-level instructions: 1.62 μs (MV instruction) Min.						
Operation memory	Relay	Internal relay (R)	4,096 points					
		Timer / Counter (T / C)	1,024 points					
	Memory area	Data register (DT)	12,315 words				32,765 words	
		Index register (IX, IY)	14 words (IO to ID)					
Master control relay points (MCR)		256 words						
Number of labels (JMP and LOOP)		256 labels						
Differential points		Equivalent to the program capacity						
Number of step ladder		1,000 stages						
Number of subroutines		500 subroutines						
Special functions	High speed counter	Single-phase: 6 points (50 kHz max. each) 2-phase: 3 channels (15 kHz max. each)*						
	Pulse output	Not available			4 points (50 kHz max. each) Two channels can be controlled individually.*			
	PWM output	Not available			4 points (6 Hz to 4.8 kHz)			
	Pulse catch input / interrupt input	Total 8 points (with high speed counter)						
	Interrupt program	Input: 8 programs (6 programs for C10 only) / Periodic: 1 program / Pulse match: 4 programs						
	Periodical interrupt	In units of 0.5 ms: 0.5 ms to 1.5 sec. / In units of 10 ms: 10 ms to 30 sec.						
	Constant scan	In units of 0.5 ms: 0.5 ms to 600 ms						
	RS232C port	One RS232C port is mounted on each of C10CRS, C10CRM, C14CRS, C14CRM, C16CT, C16CP, C32CT, C32CP, T32CT, T32CP, F32CT and F32CP type (3P terminal block) Transmission speed (Baud rate): 2,400 to 115,200 bits/s, Transmission distance: 15 m 9.8 ft. Communication method: half duplex						
	RS485 port	One RS485 port is mounted on each of C10MRS, C14MRS, C16MT, C16MP, C32MT, C32MP, T32MT, T32MP, F32MT and F32MP type(3P terminal block) Transmission speed (Baud rate): 115.2 kbps (It is possible to change to 19.2 kbps by the setting.), Transmission distance: 1,200 m 3,937 ft. Communication method: half duplex						
Maintenance		Program and system register						
	Memory backup	Stored program and system register in EEPROM						
		Operation memory	Stored fixed area in EEPROM Counter: 16 points Internal relay: 128 points Data register: 315 words				Backup of the entire area by a built-in secondary battery	Backup of the entire area by FeRAM (without the need for a battery)
	Self-diagnostic function		Watchdog timer (690 ms approx.), Program syntax check					
	Real-time clock function		Not available				Available	Not available
Other functions		Rewriting in RUN mode, Download in RUN mode (incl. comments), 8-character password setting, and Program upload protection						

* For the limitations while operating units, see the manual.

■ General specifications (FP0R Control units)

Item	Specifications
Rated voltage	24 V DC
Operating voltage range	20.4 to 28.8 V DC
Allowed momentary power off time	C10, C14, C16: 5 ms (at 20.4 V DC), 10 ms (21.6 V DC or higher) C32, T32, F32: 10 ms (20.4 V DC or higher)
Ambient temperature	0 to +55 °C 32 to +131 °F
Storage temperature	-40 to +70 °C -40 to +158 °F (-20 °C to +70 °C -4 to +158 °F for T32 only)
Ambient humidity	10 to 95% RH (at 25 °C 77 °F , no condensation)
Storage humidity	10 to 95% RH (at 25 °C 77 °F , no condensation)
Breakdown voltage (Detection current: 5 mA)	Input terminals - output terminals, Output terminals - power and functional ground terminals --- Transistor output: 500 V AC for 1 minute (Relay output: 1,500 V AC for 1 minute) / Input terminals - power and functional ground terminals, Functional ground terminal - power terminal --- Transistor output: 500 V AC for 1 minute (Relay output: 500 V AC for 1 minute) / Output terminals - output terminals (different common terminals) --- Relay output: 1,500 V AC for 1 minute
Insulation resistance (Test voltage: 500 V DC)	Input terminals - output terminals, input terminals - power and functional ground terminals, output terminals - power and functional ground terminals, functional ground terminal - power terminal --- Transistor output: 100 MΩ minimum (relay output: 100 MΩ minimum) / Output terminals - output terminals (different common terminals) --- Relay output: 100 MΩ minimum
Vibration resistance	5 to 9 Hz, single amplitude of 3.5 mm, 1 sweep/min; 9 to 150 Hz, constant acceleration of 9.8 m/s ² , 1 sweep/min; for 10 min each in X, Y, and Z directions
Shock resistance	147 m/s ² or more, 4 times each in X, Y, and Z directions
Noise immunity	1,000 V (p-p) with pulse widths 50 ns and 1 µs (using a noise simulator) (Power supply terminal)
Operating condition	Free from corrosive gasses and excessive dust

■ Input specifications (Common to control units and expansion units) (As for the limitation on the number of simultaneous ON points, please refer to the manual.)

Item	Control unit	Expansion unit
Rated input voltage	24 V DC	
Operating voltage range	21.6 to 26.4 V DC	
Rated input current	2.6 mA approx. (at 24 V DC)	4.7 mA approx. (at 24 V DC)
Input impedance	9.1 kΩ approx.	5.1 kΩ approx.
Input points per common	6 points / common (C10), 8 points / common (C14, C16), 16 points / common (C32, T32, F32)	
Min. ON voltage/ON current	19.2 V / 2 mA	
Max. OFF voltage/OFF current	2.4 V / 1.2 mA	
Response time	OFF → ON: 20 µs or less * An input time constant (0.1 to 64 ms) can be set. ON → OFF: Same as above	2 ms or less Same as above
Insulation method	Photocoupler	

* Since the response time of X0 to X7 is very fast (for high-speed counter input) the FP0 happens to chattering noise as an input signal. To prevent this, it is recommended that the timer should be put in the ladder program.

SPECIFICATIONS

■ Output specifications (Common to control units and expansion units)

1. Relay output type

(As for the limitation on the number of simultaneous ON points, please refer to the manual.)


Item	Specifications
Output type	1a
Rated control capacity	2 A 250 V AC, 2 A 30 V DC (4.5 A / common)
Response time	OFF → ON: 10 ms approx. ON → OFF: 8 ms approx.
Life time	Mechanical: 2 × 10 ⁷ operations or more Electrical: 10 ⁴ operations or more
Surge absorber	None
Output points per common	2 points / common + 1 point / common + 1 point / common (C10), 4 points / common + 1 point / common + 1 point / common (C14)

2. Transistor output type

Item	Specifications	NPN	PNP
Output type	Open collector		
Rated load voltage		5 to 24 V DC	24 V DC
Load voltage allowable range		4.75 to 26.4 V DC	21.6 to 26.4 V DC
Max. load current		C16, C32, T32 and F32: 0.2 A / point (Max. 14 per common terminal) E16, E32, E8Y and E16Y: 0.3 A / point (Max. 14 per common terminal)	
OFF state leakage current		1 µA or less	
ON state voltage drop		0.2 V DC or less	
Response time	OFF → ON: 20 µs or less (Load current: 5 mA or more), 0.1 ms or less (Load current: 0.5 mA or more) (Note) ON → OFF: 40 µs or less (Load current: 5 mA or more), 0.2 ms or less (Load current: 0.5 mA or more) (Note)		
External power supply	Voltage: 21.6 to 26.4 V DC Current: C16, E16T and E8YT: 30 mA or less C32, T32, F32, E32T and E16Y: 60 mA or less	C16, E16P and E8YP: 35 mA or less C32, T32, F32, E32P and E16YP: 70 mA or less	
Surge absorber		Zener diode	
Output points per common		8 points / common (C16T), 16 points / common (C32, T32, F32)	
Insulation method		Photocoupler	

Note: For expansion unit: 1 ms or less

■ I/O circuit diagrams

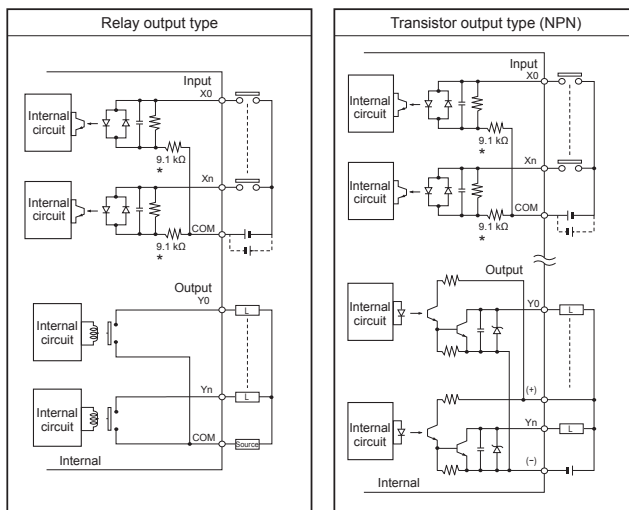


Note: For transistor output types, make sure that the externally supplied voltage between the (+) and (-) terminal is between 21.6 and 26.4 V DC.
* For expansion unit: 5.1 k Ω

■ Analog unit specifications (FP0 Expansion units)

1. Analog input specifications

Item	Specifications
Number of input points	2 channels / unit
Input range	Voltage range: 0 to 5 V (K0 to K4000) (Note 1) -10 to +10 V (K -2000 to K+2000) (Note 1) Current range: 0 to 20 mA (K0 to K4000) (Note 1)
Resolution	1/4,000 (12 bits)
Conversion speed	1 ms / channel (Note 2)
Overall precision	±1 % F.S. or less (0 to 55 °C 32 to 131 °F), ±0.6 % F.S. or less (25 °C 77 °F)
Input impedance	Voltage range: 1 MΩ or more Current range: 250 Ω
Absolute maximum input	Voltage range: ±15 V Current range: ±30 mA
Insulation method	Between analog input terminal and FP0 internal circuit: optical coupler insulation (non-insulated between channels) Between analog input terminal and analog I/O unit external power supply: based on insulation type DC/DC converter Between analog input terminal and analog output terminal: based on insulation type DC/DC converter
Number of I/O contact points	32 input contact points
Averaging function	None

Notes: 1) If the analog input value exceeds the upper or lower limit, the digital value will preserve the upper or lower limit.
2) The time shown below is required before the analog data is reflected in the control unit input.

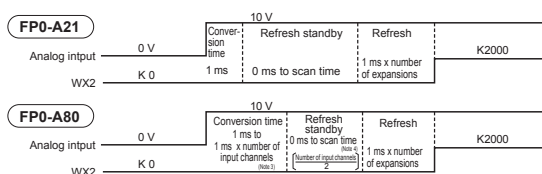


3) Settings value switch for the number of input channel
4) With each one scan of the control unit, the data for two channels will be loaded into control unit. In other words, if the input channel number switch is set to 8-channel, the data in the control unit will be updated once every four scans.

2. Analog output specifications

Item	Specifications
Number of output points	1 channel / unit
Output range	Voltage range: -10 to +10 V range (K -2000 to K+2000) (Note 1) Current range: 0 to 20 mA (K0 to K4000) (Note 1)
Resolution	1/4,000 (12 bits)
Conversion speed	500 µs / channel (Note 2)
Overall precision	±1 % F.S. or less (0 to 55 °C 32 to 131 °F), ±0.6 % F.S. or less (25 °C 77 °F)
Output impedance	Voltage range: 0.5 Ω or less
Max. output current	Voltage range: ±10 mA
Absolute output load resistance	Current range: 30 Ω or less
Insulation method	Between analog output terminal and FP0 internal circuit: optical coupler insulation (non-insulated between channels) Between analog output terminal and analog I/O unit external power supply: based on insulation type DC/DC converter Between analog output terminal and analog input terminal: based on insulation type DC/DC converter
Number of I/O contact points	16 output contact points

Notes: 1) If the digital value exceeds the upper or lower limit, D/A conversion will not take place.
(Analog output will remain as the previous data.)
2) The time shown below is required to update the actual analog output.

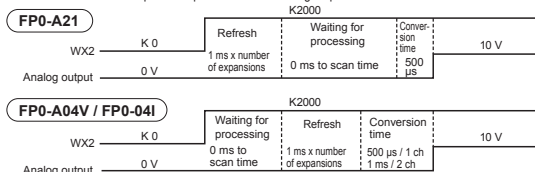

3) The data for two channels will be output to the D/A converter unit with one scan of the control unit.

■ Thermocouple unit specifications (FP0 Expansion units)

Item	Specifications
Number of input points	4-channel, 8-channel (The number of input points can be changed 2, 4, 6 and 8 channels.)
Input range	Range for K and J: -100.0 to 500.0 °C/-148.0 to 750.0 °F (Note 1) Range for T: -100.0 to 400.0 °C/-148.0 to 752.0 °F Range for R: 0 to 1500.0 °C/32.0 to 1590.0 °F (Note 1)
Digital output	K and J (when using °C): K -1000 to K5000 K and J (when using °F): K -1480 to K7900 (Note 1) (When range over using °C: K -1001, K5001 or K8000) (When range over using °F: K -1481, K7901 or K8000) (When the thermocouple broken: K8000) (Note 2) (Until the temperature can be measured at the initial startup: K8001) (Note 3) T (when using °C): K -1000 to K4000 T (when using °F): K -1480 to K7520 (When range over using °C: K -1001, K4001 or K8000) (When range over using °F: K -1481, K7521 or K8000) (When the thermocouple broken: K8000) (Note 2) (Until the temperature can be measured at the initial startup: K8001) (Note 3) R (when using °C): K0 to K15000 R (when using °F): K320 to K15900 (Note 1) (When range over using °C: K0, K15001 or K16000) (When range over using °F: K0, K15901 or K16000) (When the thermocouple broken: K16000) (Note 2) (Until the temperature can be measured at the initial startup: K16001) (Note 3)

Item	Specifications
Resolution	0.1 °C
Sampling cycle	300 ms: when using 2 channels for an input points (Note 4) 500 ms: when using 4 channels for an input points (Note 4) 700 ms: when using 6 channels for an input points (Note 4) 900 ms: when using 8 channels for an input points (Note 4)
Overall accuracy	Range for K and J: (-100 to 500 °C): ±0.8 °C or less Range for T: (-100 to 400 °C): ±0.8 °C or less Range for R: (0 to 98.9 °C): ±3 °C or less (100 to 298.9 °C): ±2.5 °C or less (300 to 1,500 °C): ±2 °C or less
Input impedance	1 MΩ or more
Insulation method	Between thermocouple input terminals and FP0 internal circuits: Photo-coupler insulation, DC/DC converter insulation Between thermocouple input terminal channels: PhotoMOS relay insulation
Number of I/O contact points	32 input contact points (Note 6)

Notes:
1) The measurement range available for degree Celsius is not available for degree Fahrenheit, of which the upper-limit measurement is set lower than degree Celsius, since the digital value (temperature value displayed) for degree Fahrenheit is bigger than that for degree Celsius.
2) When the thermocouple is broken, the digital value will become K8000 or K16000 within 70 seconds since broken. Practice in the ladder program a process for avoiding a risk, would be resulting from a broken thermocouple, and exchange the thermocouple.
3) Until the conversion data will be ready after the initial startup was made, the digital value shows K8001 or K16001. Those are not a temperature data. Create a ladder program, so that they are not acquired as a temperature data.
4) The settings of the input channel selection switch.
5) Conversion values for 6-time measurements (6 from the latest 8 measurements, excluding the max. and min.) are averaged, so that it takes time for the digital value to be displayed due to the rapid temperature change.
6) The control unit reads the data for 2 channels per 1 scan by the control unit. Read data by utilizing the sample program given in the product specifications and manual.

SPECIFICATIONS

I/O Link unit specifications (FP0 Expansion units)

Item	Specifications
Communication method	Two-wire, half duplex
Synchronous method	Asynchronous method
Transmission line	2-wire cable (Twisted-pair cable or VCTF 0.75 mm ² x 2C equivalent)
Transmission distance (Total distance)	Max. 700 m 2,297 ft (using twisted-pair cable) Max. 400 m 1,312 ft (using VCTF cable)
Transmission speed (Baud rate)	0.5 Mbits/s
Number of control I/O point per an I/O link unit	64 points (Input: 32 points and Output: 32 points) ^(Note)
Remote I/O map allocation	32X / 32Y
Interface	Conforming to RS485
Transmission error check	CRC (Cyclic Redundancy Check) method

Note: This point number is the number of points that can be linked for inputting and outputting via the host PLC and network MEWNET-F. If the output for the I/O link unit error flag is set to ON, this number becomes 63 points (31 input points and 32 output points).

FP Web-server2 unit specifications (FP0 Expansion units)

Item	Specifications
Communication functions	RS232C ↔ Ethernet conversion (PLC remote programming via Ethernet) E-mail sending function HTTP server function General-purpose communication (Server/Client) PPP server function
Communication interface	RS232C terminal block 3-pin: Mainly used for PLC connection RS232C D-Sub 9-pin: Mainly used for Modem connection 100 BASE-TX (RJ45): Used for Ethernet connection
RS232C communication	Transmission speed: 1,200, 2,400, 4,800, 9,600, 19,200, 38,400, 57,600, 115,200 bits/s Data length: 7 bits / 8 bits, Parity: Even / Odd / None
Ethernet communication	100 Mbits/s (100 BASE-TX: RJ45)
Supported protocol	TCP, UDP, IP, DHCP, FTP, TELNET, HTTP, SMTP, and PPP
Memory size	148 kB approx. (for storing htm files)
Setup method	Setup using FP Web Configurator Tool 2

CC-Link slave unit specifications (FP0 Expansion units)

1. Communication specifications

Item	Specifications
Version	CC-Link Ver.1.10
Communication method	Broadcast polling method
Transmission speed	10 Mbits/s, 5 Mbits/s, 2.5 Mbits/s, 625 kbits/s, 156 kbits/s
Max. transmission distance (Note)	Ver.1.10 CC-Link cable CC-Link high-performance cable
	10 Mbits/s 100 m 328 ft
	5 Mbits/s 160 m 525 ft
	2.5 Mbits/s 400 m 1,312 ft
	625 kbits/s 900 m 2,952 ft
	156 kbits/s 1,200 m 3,937 ft
Interface	RS485
Station type	Remote device station
Number of occupied stations	1 station

Note: Length of the multi-drop connected cables at both ends
The cable length has restrictions in communication speed, CC-Link version, and dedicated cables to be used.
For details concerning the CC-Link, refer to the CC-Link Partner Association.
When an FP0 thermocouple unit is used with an FP0 CC-Link slave unit, the measurement accuracy of the thermocouple unit which is installed on the left of the CC-Link slave unit is as shown in the table below.

Thermocouple	Standard specifications	When CC-Link slave unit with a thermocouple unit
K, J and T	0.8 °C 33.44 °F	2 °C 35.6 °F
R	0 to 99.9 °C 32 to 211.82 °F	3 °C 37.4 °F
	100 to 299.9 °C 212 to 571.82 °F	2.5 °C 36.5 °F
	300 to 1,500 °C 572 to 2,732 °F	2 °C 35.6 °F
		4 °C 39.2 °F

Power supply unit specifications (FP0 Expansion units)


Item	Specifications
Input	Rated input voltage 100 to 240 V AC Variable input voltage range 85 to 264 V AC Rated frequency 50/60 Hz Frequency range 47 to 63 Hz Number of phases Single-phase Inrush current 30 A (0 to P) or less, with cold start Leakage current 0.75 mA or less Allowable momentary power off time 10 ms or more
Output	Rated voltage 24 V DC Voltage accuracy ±5 % Rated current 0.7 A ^(Note) Output current range 0 to 0.6 A Ripple voltage 500 mV or less
Protective functions	Over-current protection 0.63 A or more Over-voltage protection Available

Note: Start up may not be possible if a device with a large inrush current is connected even if below the rated current. In such a case, we recommend suppressing the inrush current by inserting a 1 to 2 Ω resistor between the power supply unit and the device.

Applicable crimp terminals

Manufacturer	Part number	Applicable wiring
JST Mfg. Co., Ltd.	V1.25-M3 (round type) V1.25-S3A (fork type)	0.35 to 1.65 mm ² AWG #22 to #15
	V2-M3 (round type) V2-S3A (fork type)	1.04 to 2.00 mm ² AWG #17 to #14

7.2 mm **0.28 in** or less



Current consumption

Type of unit	Control unit current consumption (24 V DC)	Expansion unit current consumption (24 V DC)
FP0R control units	C10 100 mA or less C14 120 mA or less C16 70 mA or less C32 90 mA or less T32 F32	—
FP0R expansion units	AFP0RE8X 10 mA or less AFP0RE8R 10 mA or less AFP0RE8YR 10 mA or less AFP0RE8YT/P 15 mA or less AFP0RE16X 10 mA or less AFP0RE16R 20 mA or less AFP0RE16T/P 20 mA or less AFP0RE16YT/P 25 mA or less AFP0RE32T/P 35 mA or less	— 50 mA or less 100 mA or less — — 100 mA or less — — — —

Type of unit	Control unit current consumption (24 V DC)	Expansion unit current consumption (24 V DC)
FP0 intelligent units	FP0-A21 20 mA or less FP0-A80 20 mA or less FP0-A04V 20 mA or less FP0-A04I 20 mA or less FP0-TC4 25 mA or less FP0-TC8	100 mA or less 60 mA or less 100 mA or less 130 mA or less — —
Communication units	FP0-CCLS 40 mA or less FP0-IOL 30 mA or less FP-WEB2 — AFP15402 (C-NET adapter) 50 mA or less	40 mA or less 40 mA or less 95 mA or less (at 24 V DC) 240 mA or less (at 12 V DC) —

Control unit current consumption Expansion unit current consumption

This refers to the current consumed via the power supply connector of the control unit. If expansion units or intelligent units are added, the current is increased by the value indicated above.

PRODUCT TYPES

1 Control units

Product name	Built-in memory (Program capacity)	Specifications						Part number
		Number of I/O points		Power supply voltage	Input	Output	Connection type	
FP0R-C10 Control Unit	EEPROM (16 k steps)	10	Input: 6 Output: 4	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RC10RS
							Molex connector	AFP0RC10RM
FP0R-C10 Control Unit with RS232C port	EEPROM (16 k steps)	10	Input: 6 Output: 4	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RC10CRS
							Molex connector	AFP0RC10CRM
FP0R-C10 Control Unit with RS485 port	EEPROM (16 k steps)	10	Input: 6 Output: 4	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RC10MRS
FP0R-C14 Control Unit	EEPROM (16 k steps)	14	Input: 8 Output: 6	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RC14RS
							Molex connector	AFP0RC14RM
FP0R-C14 Control Unit with RS232C port	EEPROM (16 k steps)	14	Input: 8 Output: 6	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RC14CRS
							Molex connector	AFP0RC14CRM
FP0R-C14 Control Unit with RS485 port	EEPROM (16 k steps)	14	Input: 8 Output: 6	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RC14MRS
FP0R-C16 Control Unit	EEPROM (16 k steps)	16	Input: 8 Output: 8	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RC16T
						Transistor PNP: 0.2 A		AFP0RC16P
FP0R-C16 Control Unit with RS232C port	EEPROM (16 k steps)	16	Input: 8 Output: 8	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RC16CT
						Transistor PNP: 0.2 A		AFP0RC16CP
FP0R-C16 Control Unit with RS485 port	EEPROM (16 k steps)	16	Input: 8 Output: 8	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RC16MT
						Transistor PNP: 0.2 A		AFP0RC16MP
FP0R-C32 Control Unit	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RC32T
						Transistor PNP: 0.2 A		AFP0RC32P
FP0R-C32 Control Unit with RS232C port	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RC32CT
						Transistor PNP: 0.2 A		AFP0RC32CP
FP0R-C32 Control Unit with RS485 port	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RC32MT
						Transistor PNP: 0.2 A		AFP0RC32MP
FP0R-T32 Control Unit with RS232C port and Real-time clock function	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RT32CT
						Transistor PNP: 0.2 A		AFP0RT32CP
FP0R-T32 Control Unit with RS485 port and Real-time clock function	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RT32MT
						Transistor PNP: 0.2 A		AFP0RT32MP
FP0R-F32 Control Unit with RS232C port and Battery-less automatic all data backup function	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RF32CT
						Transistor PNP: 0.2 A		AFP0RF32CP
FP0R-F32 Control Unit with RS485 port and Battery-less automatic all data backup function	EEPROM (32 k steps)	32	Input: 16 Output: 16	24 V DC	24 V DC Sink/Source (±common)	Transistor NPN: 0.2 A	MIL connector	AFP0RF32MT
						Transistor PNP: 0.2 A		AFP0RF32MP

Notes: 1) See page 13 for the "Control unit replacement table" of the existing FP0 control units.
2) A power cable (Part number: AFP0G805) is supplied with the control units.

2 Expansion units

Product name	Specifications						Part number
	Number of I/O points		Power supply voltage	Input	Output	Connection type	
FP0R-E8 Expansion Unit	8	Input: 8	—	24 V DC Sink/Source (±common)	—	MIL connector	AFP0RE8X
	8	Input: 4 Output: 4	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RE8RS
	8	Output: 8	24 V DC	—	Relay: 2 A	Molex connector	AFP0RE8RM
	8	Output: 8	—	—	Transistor NPN: 0.3 A	Terminal block	AFP0RE8YRS
	8	Output: 8	—	—	Transistor PNP: 0.3 A	MIL connector	AFP0RE8YT
FP0R-E16 Expansion Unit	16	Input: 16	—	24 V DC Sink/Source (±common)	—	MIL connector	AFP0RE16X
	16	Input: 8 Output: 8	24 V DC	24 V DC Sink/Source (±common)	Relay: 2 A	Terminal block	AFP0RE16RS
	16	Output: 8	—	—	Relay: 2 A	Molex connector	AFP0RE16RM
	16	Input: 8 Output: 8	—	24 V DC Sink/Source (±common)	Transistor NPN: 0.3 A	Terminal block	AFP0RE16T
	16	Input: 8 Output: 8	—	24 V DC Sink/Source (±common)	Transistor PNP: 0.3 A	MIL connector	AFP0RE16P
	16	Output: 16	—	—	Transistor NPN: 0.3 A	MIL connector	AFP0RE16YT
FP0R-E32 Expansion Unit	32	Input: 16 Output: 16	—	24 V DC Sink/Source (±common)	Transistor PNP: 0.3 A	MIL connector	AFP0RE16YP
	32	Input: 16 Output: 16	—	24 V DC Sink/Source (±common)	Transistor NPN: 0.3 A	MIL connector	AFP0RE32T
							AFP0RE32P

Notes: 1) The relay output type expansion units come with a power cable (part number: AFP0581).
(The transistor output type expansion units need no power cable.)

2) The terminal block type relay output units have two terminal blocks (9 pins) made by Phoenix.
Use a 2.5 mm 0.10 inch wide screwdriver. Preferably use the specific terminal block screwdriver (part number: AFP0806, Phoenix type code SZS0, 4 x 2.5 mm 0.10 inch) or equivalent.

3) The connector type relay output units have two connectors made by Nihon Molex (Molex type code 51067-0900, 9 pins). Use the specific Molex connector press-fit tool (part number: AFP0805, Nihon Molex type code 57189-5000) or equivalent.

4) The transistor output units have a press-fit socket for wire-pressed terminal cable and contacts.
Use the press-fit tool (part number: AXY52000FP) for wire-pressed terminal cable.

PRODUCT TYPES

③ Intelligent units

Product name	Specifications	Product number	Part number
FP0 Analog I/O Unit	<Input specifications> Number or channels : 2 channels Input range : Voltage 0 to 5 V, -10 to +10 V (Resolution: 1/4,000) Current 0 to 20 mA (Resolution: 1/4,000)	FP0-A21	AFP0480
	<Output specifications> Number or channels : 1 channel Output range : Voltage -10 to +10 V (Resolution: 1/4,000) Current 0 to 20 mA (Resolution: 1/4,000)		
FP0 A/D Converter Unit	<Input specifications> Number or channels : 8 channels Input range : Voltage 0 to 5 V, -10 to +10 V, -100 to 100 mV (Resolution: 1/4,000) Current 0 to 20 mA (Resolution: 1/4,000)	FP0-A80	AFP0401
FP0 D/A Converter Unit	<Output specifications> Number or channels : 4 channels Output range : (Voltage output type) -10 to +10 V (Resolution: 1/4,000) (Current output type) 4 to 20 mA (Resolution: 1/4,000)	FP0-A04V	AFP04121
		FP0-A04I	AFP04123
FP0 Thermocouple Unit	K, J, T and R thermocouple, Resolution: 0.1°C	FP0-TC4	AFP0420
	K, J, T and R thermocouple, Resolution: 0.1°C	FP0-TC8	AFP0421

④ Link and communication units

Product name	Specifications	Power supply voltage	Product number	Part number
FP0 CC-Link Slave Unit	This unit is for making the FP0 function as a slave station of the CC-Link. Only one unit can be connected to the furthest right edge of the FP0 expansion bus. Note: Accuracy will change if an FP0 thermocouple unit is used at the same time. For details, please refer to the catalog or to the CC-Link Unit manual.	24 V DC	FP0-CCLS	AFP07943
FP0 I/O Link Unit	This is a link unit designed to make the FP0 function as a station to MEWNET-F (remote I/O system).	24 V DC	FP0-IOL	AFP0732
KS1 Signal Converter	RS232C/RS485 data can be easily monitored by LAN.	24 V DC	—	AKS1202
C-NET Adapter (for computer side)	This is an RS485 adapter designed to allow use of the computer link function for connecting to a network-connected PLC via C-NET from a host computer.	100 to 240 V AC	—	AFP8536
		24 V DC	—	AFP8532
FP Web-Server 2 Unit	Unit for connecting FP series or RS232C interface device and Ethernet Web-server function and E-mail sending function	24 V DC	FP-WEB2	AFP0611

⑤ Power supply unit and others

Product name	Specifications	Product number	Part number
FP0 Power Supply Unit	Input voltage: 100 to 240 V AC Output capacity: 24 V DC, 0.7 A	FP0-PSA4	AFP0634
FP Memory Loader	Data clear type	—	AFP8670
	Data hold type	—	AFP8671

⑥ Programming tools

Product name	Specifications		Part number
Windows version tool software Control FPCWIN Pro Ver.6 (Conforms to IEC61131-3) (FP0R is compatible with Ver. 6.1 or later.)	Japanese version, Full type	CD-ROM for Windows	AFPS0160
	English version, Full type	CD-ROM for Windows	AFPS0560
Windows version tool software Control FPCWIN GR (FP0R is compatible with Ver. 2.8 or later.)	Japanese tool kit with cable	CD-ROM for Windows, with cable (AFC8503) for connection of FP to DOS/V PC	AFPS10122
	English version, Full type	CD-ROM for Windows	AFPS10520
	English version, Small type	CD-ROM for Windows	AFPS11520
	Chinese version, Full type	CD-ROM for Windows	AFPS10820
	Korean	CD-ROM for Windows	AFPS10920
Handheld programmer	Not available for FP0R. Also the discontinued models (AFP1113V2 and AFP1114V2) are not compatible with FP0R. (They are compatible with FP0.)		

7 Options and maintenance parts

Product name	Specifications	Part number
FP Memory Loader (Note)	Data clear type	AFP8670
	Data hold type	AFP8671
Terminal screwdriver	Relay output type Necessary when wiring terminals block (Phoenix).	AFP0806
Molex connector pressure contact tool	Necessary when wiring relay output type and Molex connectors. (MOLEX: 57189-5000)	AFP0805
Multi-wire connector pressure contact tool	Necessary when wiring transistor output type connectors.	AXY52000FP
FP0 Slim type Mounting plate	Screw-stop attachment plate for FP0 expansion unit. Slim model.	AFP0803 (set for 10)
FP0 Flat type Mounting plate	Screw-stop attachment plate for FP0 control unit. Flat model.	AFP0804 (set for 10)
Relay output Molex type I/O cable	Loose-wiring cable (9 leads) with molex socket attached at one end, AWG20, 0.5 mm ² , 1 set: 2 cables (blue & white).	Length: 1 m 3.3 ft AFP0551 (2 cables set)
		Length: 3 m 9.8 ft AFP0553 (2 cables set)
Transistor output type I/O Cable	Loose-wiring cable (10 leads) with connectors attached at one end, AWG22, 0.3 mm ² , 1 set: 2 cables (blue & white)	Length: 1 m 3.3 ft AFP0521 (2 cables set)
		Length: 3 m 9.8 ft AFP0523 (2 cables set)
Flat cable connector set	Flat cable connector set (10 leads)	AFP0808 (including 4 pieces)
Terminal socket	Attaches to relay output and terminal block type. Maintenance part	AFP0802 (2 sockets per pack)
Molex socket	Attaches to relay output and Molex connector types. Maintenance part	AFP0801 (2 sockets per pack)
Wire-press socket	Attaches to transistor output type. Maintenance part	AFP0807 (2 sockets per pack)
Power cable for control unit	Attaches to FP0R control unit. Maintenance part Length: 1 m 3.3 ft	AFPG805 (1 cable per pack)
Power cable for expansion unit	Attaches to expansion unit. Maintenance part Length: 1 m 3.3 ft	AFP0581 (1 cable per pack)

Note: FP0R is compatible with Ver. 2 or later.

DIMENSIONS

(Unit: mm in)

Control units and Expansion units



* For the relay output type, the terminal block type is listed as the representative type.

Control units

C10RS, C10RM, C10CRS, C10CRM, C10MRS, C14RS, C14RM, C14CRS, C14CRM and C14MRS

Expansion units

E8RS, E8RM, E8YRS, E16RS and E16RM



Terminal array

C10RS/C10RM	C14RS/C14RM	E8RS/E8RM	E16RS/E16RM
Input	Input	Input	Input
X0	X0	X0	X0
X1	X1	X1	X1
X2	X2	X2	X2
X3	X3	X3	X3
X4	X4	X4	X4
X5	X5	(NC)	X5
(NC)	X6	(NC)	X6
(NC)	X7	(NC)	X7
COM	COM	COM	COM
Output	Output	Output	Output
Y0	Y0	Y0	Y0
Y1	Y1	Y1	Y1
(NC)	Y2	Y2	Y2
(NC)	Y3	Y3	Y3
COM	Y4	(NC)	Y4
Y2	Y4	(NC)	Y5
COM	COM	(NC)	Y6
Y3	COM	(NC)	Y7
COM	COM	COM	COM



Notes: 1) DIN rail is attached on the center of the unit.
2) The AFP0RE8YRS is not equipped with an input terminal block.

Control units

C16T, C16P, C16CT, C16CP, C16MT and C16MP

Expansion units

E16T, E16P, E8X, E8YT and E8YP



Terminal array

Input (8 points / common)	
X0	X1
X2	X3
X4	X5
X6	X7
COM	COM
Output (8 points / common)	
Y0	Y1
Y2	Y3
Y4	Y5
Y6	Y7
(+)	(-)

RS232C port Terminal array



RS485 port Terminal array





Note: Two COM terminals on the input circuit are connected inside the unit.

Control units

C32T, C32CT, C32P, C32CP, C32MT, C32MP, T32CT, T32CP, T32MT, T32MP, F32CT, F32CP, F32MT and F32MP

Expansion units

E32T, E32P, E16X, E16YT and E16YP



Terminal array

Input (16 points / common)	
X0	X1
X2	X3
X4	X5
X6	X7
COM	COM
COM	COM
Output (16 points / common)	
Y0	Y1
Y2	Y3
Y4	Y5
Y6	Y7
(+)	(-)
(+)	(-)

RS232C port Terminal array



RS485 port Terminal array







Notes: 1) Four COM terminals on the input circuit are connected inside the unit.
2) Two (+) terminals and two (-) terminals on the output circuit are connected respectively inside the unit.

FP0 Analog I/O Unit and D/A Converter Unit

FP0 A/D Converter Unit and Thermocouple Unit


FP Web-Server 2 Unit

FP0 Power Supply Unit

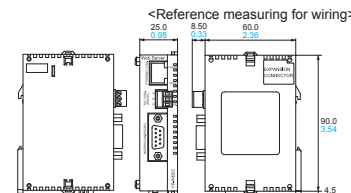


External Dimensions During Expansions

Top view (with DIN rail attached)



Front view



A + B + C + D dimensions (mm in)

Control unit	A	A→B	A→C	A→D
Control unit only				
1 expansion unit connected				
2 expansion units connected				
3 expansion units connected				
C10RS	25	50	75	100
C10CRS	0.98	1.97	2.95	3.94
C10RM				
C10CRM				
C10MRS				
C14RS				
C14RM				
C14CRM				
C14MRS				
C32T	30	55	80	105
C32CT	1.18	2.17	3.15	4.13
C32P				
C32CP				
C32MT				
C32MP				
T32CT				
T32CP				
T32MT				
T32MP				
F32CT				
F32CP				
F32MT				
F32MP				