

Panasonic

INDUSTRY

NEW

Contact-type

Self-Monitoring Sensor

Digital Displacement Sensor Head

50 mm 1.969 in type
General Purpose

HG-S1050



Lightweight

Long stroke
Newly arrived
50 mm 1.969 in type!

Lightweight with a robust yet slim body!
Optical absolute method eliminates “value skipping” and “unset zero point”!

Plain bearings with 2-point support structure

Disperses lateral shock to significantly reduce the risk of breakage.

**Slender (W 17.5 × H 173.5 × D 27 mm
W 0.689 × H 6.831 × D 1.063 in) and
lightweight (approx. 180 g) body**

Realizes the industry's smallest^{*1} class of sensor head.

Metal guide whirl-stop structure

Risk of damage and measurement failure due to deformation and wear deterioration are significantly reduced.

^{*1}: As of November 2019, in-company survey.

Spindle stopper

Blocks upward thrust impact.

**Tip deviation amount of
40 µm 1.575 mil or less (typical value)^{*2}**

Deviation of the measurement point is held to a minimum.

^{*2}: Value calculated from the clearance of the upper and lower plain bearings.

Application

Measuring the height of machined parts



Bending-resistant cable^{*3}

A bending-resistant cable provides peace of mind even when the sensor head is installed on a movable tool.

^{*3}: Sensor head connection cable is sold separately.

A straight connector and L-shaped connector are also available.

• Length: 3 m 9.843 ft CN-HS-C3(L)

• Length: 7 m 22.966 ft CN-HS-C7(L)

NEW • Length: 10 m 32.808 ft CN-HS-C10(L)

• Length: 20 m 65.617 ft CN-HS-C20(L)

Hot-swappable

The sensor head can be replaced without turning OFF the controller power.

NEW

**Sensor head
50 mm 1.969 in
type
HG-S1050**



Controller^{*4}
HG-SC□



^{*4}: Controllers are sold separately.

• Master unit (high-performance type) HG-SC101(-P)

• Slave unit (high-performance type) HG-SC111(-P)

• Slave unit (standard type) HG-SC112(-P)

• Slave unit (wire-saving type) HG-SC113

SPECIFICATIONS

Type		50 mm 1.969 in type
		General purpose
Model No.		Standard type
		HG-S1050
Regulatory compliance		EMC Directive, RoHS Directive
Compatible controller (Note 2)		HG-SC101(-P), HG-SC111(-P), HG-SC112(-P), HG-SC113
Position detection method		Optical absolute linear encoder method
Measurement range		50 mm 1.969 in
Stroke		50.5 mm 1.988 in or more
Measuring force	Downward mount	3.8 N or less (50 mm 1.969 in pressing position) 1.9 N (intermediate position) (Note 3)
	Upward mount	3.2 N or less (50 mm 1.969 in pressing position) 1.4 N (intermediate position) (Note 3)
	Side mount	3.4 N or less (50 mm 1.969 in pressing position) 1.7 N (intermediate position) (Note 3)
Resolution		0.5 μm 0.020 mil
Sampling period		1 ms
Indication accuracy (P-P)		Full range: 3.5 μm 0.138 mil or less
Tip deviation amount		40 μm 1.575 mil or less (typical) (Note 4)
Hot swap function		Incorporated
Operation indicator		2-color LED (Orange / Green)
Pollution degree		2
Operating altitude		2,000 m 6561.68 ft or less (Note 5)
Environmental resistance	Protection	IP67 (IEC) (Note 6)
	Ambient temperature	-10 to +55 °C +14 to +131 °F (No condensation or icing allowed), Storage: -20 to +60 °C -4 to +140 °F
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH
	Insulation resistance	100 MΩ or more at 250 V DC
	Vibration resistance	10 to 55 Hz frequency, 1.5 mm 0.059 in double amplitude in X, Y and Z directions for two hours each
Shock resistance		980 m/s ² acceleration in X, Y and Z directions three times each
Grounding method		Capacitor grounding
Material		Body: Aluminum alloy, Holder: Stainless steel, Spindle: Tool steel, Probe (Note 7): Ceramic, Rubber bellows: NBR (black)
Weight		Main unit weight: 180 g approx.
Accessories		Sensor head fastening wrench 1 pc., Mounting nut 1 pc.

- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were as follows: standard type measurement probe (TR-S10-C), ambient temperature +20 °C +68 °F, and a clean atmosphere where dust and liquids such as water and oil do not come in contact with the equipment.
2) Always connect the 50 mm 1.969 in type (HG-S1050) to an HG-SC□ controller manufactured February 2019 or later.
3) Typical value near center of measurement.
4) Value calculated from the clearance of the upper and lower plain bearings.
5) Do not use or store in an environment that has been pressurized to an air pressure higher than the atmospheric pressure at 0 m.
6) Excludes damage and deterioration to rubber bellows due to external causes.
7) The probes (optional) are also available.

OPTIONS

The following products are available on a made to order basis.


- Measurement probes (Note): Standard type (5 per set) **TR-S10-C×5**
 - Joint: 15 mm 0.591 in length type **TR-J102**, 25 mm 0.984 in length type **TR-J104**
 - Rubber bellows: For 50 mm 1.969 in type sensor head (5 pcs. per set) **TR-G50×5**
- Note: A variety of measurement probes are available. Please refer to our website for details.

DIMENSIONS (Units: mm in)


The CAD data can be downloaded from our website.

HG-S1050

Sensor head

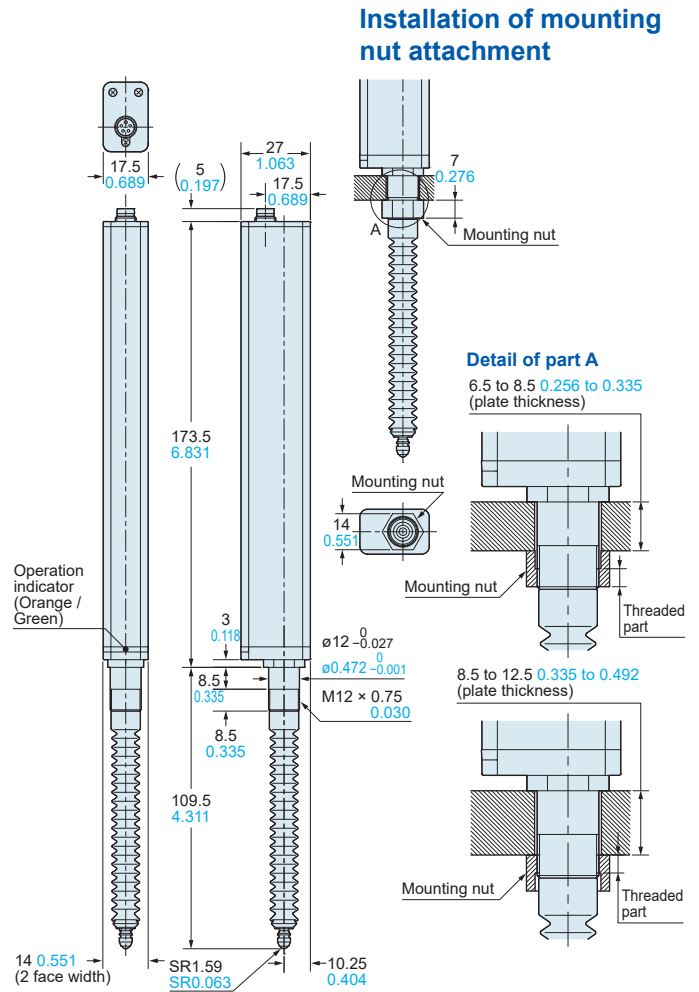

Installation of sensor head connection cable

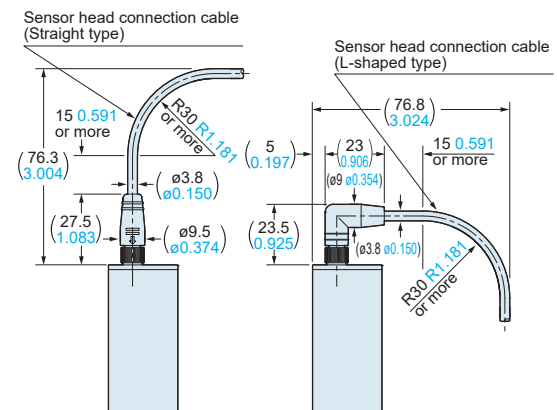

Please contact

Panasonic Corporation

Industrial Device Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2019