


ORDER GUIDE

Type	Appearance	Model No.	Dimensions of effective reflective surface	Applicable light curtain				
				SF4B series (Type4)			SF2B series (Type2)	
				Finger protection type	Hand protection type	Arm / Foot protection type	Hand protection type	Arm / Foot protection type
Corner mirror for light curtain		RF-SFBH-8	173x72 mm 6.811x2.835 in	-	-	-	SF2B-H8 (SL) (-□)	SF2B-A4 (SL) (-□)
		RF-SFBH-12	236x72 mm 9.291x2.835 in	SF4B-F23 (-01)	SF4B-H12 (-01)	SF4B-A6 (-01)	SF2B-H12 (SL) (-□)	SF2B-A6 (SL) (-□)
		RF-SFBH-16	316x72 mm 12.441x2.835 in	SF4B-F31 (-01)	SF4B-H16 (-01)	SF4B-A8 (-01)	SF2B-H16 (SL) (-□)	SF2B-A8 (SL) (-□)
		RF-SFBH-20	396x72 mm 15.591x2.835 in	SF4B-F39 (-01)	SF4B-H20 (-01)	SF4B-A10 (-01)	SF2B-H20 (SL) (-□)	SF2B-A10 (SL) (-□)
		RF-SFBH-24	476x72 mm 18.740x2.835 in	SF4B-F47 (-01)	SF4B-H24 (-01)	SF4B-A12 (-01)	SF2B-H24 (SL) (-□)	SF2B-A12 (SL) (-□)
		RF-SFBH-28	556x72 mm 21.890x2.835 in	SF4B-F55 (-01)	SF4B-H28 (-01)	SF4B-A14 (-01)	SF2B-H28 (SL) (-□)	SF2B-A14 (SL) (-□)
		RF-SFBH-32	636x72 mm 25.039x2.835 in	SF4B-F63 (-01)	SF4B-H32 (-01)	SF4B-A16 (-01)	SF2B-H32 (SL) (-□)	SF2B-A16 (SL) (-□)
		RF-SFBH-36	716x72 mm 28.189x2.835 in	SF4B-F71 (-01)	SF4B-H36 (-01)	SF4B-A18 (-01)	SF2B-H36 (SL) (-□)	SF2B-A18 (SL) (-□)
		RF-SFBH-40	796x72 mm 31.339x2.835 in	SF4B-F79 (-01)	SF4B-H40 (-01)	SF4B-A20 (-01)	SF2B-H40 (SL) (-□)	SF2B-A20 (SL) (-□)
		RF-SFBH-48	956x72 mm 37.638x2.835 in	SF4B-F95 (-01)	SF4B-H48 (-01)	SF4B-A24 (-01)	SF2B-H48 (SL) (-□)	SF2B-A24 (SL) (-□)
		RF-SFBH-56	1,116x72 mm 43.937x2.835 in	SF4B-F111 (-01)	SF4B-H56 (-01)	SF4B-A28 (-01)	SF2B-H56 (SL) (-□)	SF2B-A28 (SL) (-□)
		RF-SFBH-64	1,276x72 mm 50.236x2.835 in	SF4B-F127 (-01)	SF4B-H64 (-01)	SF4B-A32 (-01)	SF2B-H64 (SL) (-□)	SF2B-A32 (SL) (-□)
		RF-SFBH-72	1,436x72 mm 56.535x2.835 in	-	SF4B-H72 (-01)	SF4B-A36 (-01)	SF2B-H72 (SL) (-□)	SF2B-A36 (SL) (-□)
		RF-SFBH-80	1,596x72 mm 62.835x2.835 in	-	SF4B-H80 (-01)	SF4B-A40 (-01)	SF2B-H80 (SL) (-□)	SF2B-A40 (SL) (-□)
RF-SFBH-88	1,756x72 mm 69.134x2.835 in	-	SF4B-H88 (-01)	SF4B-A44 (-01)	SF2B-H88 (SL) (-□)	SF2B-A44 (SL) (-□)		
RF-SFBH-96	1,916x72 mm 75.433x2.835 in	-	SF4B-H96 (-01)	SF4B-A48 (-01)	SF2B-H96 (SL) (-□)	SF2B-A48 (SL) (-□)		

SPECIFICATIONS


Item	Type	Corner mirror
Model No.		RF-SFBH-□
Attenuation rate of sensing range		With one mirror: 90 %, With two mirrors: 80 % (When used in combination with the SF4B / SF2B series)
Environmental resistance	Ambient temperature	-10 to +55 °C +14 to +131 °F (No dew condensation or icing allowed), Storage: -25 to +70 °C -13 to +158 °F
	Ambient humidity	30 to 85 % RH, Storage: 30 to 95 % RH
	Vibration resistance	10 to 55 Hz frequency, 0.75 mm 2.953 in amplitude in X, Y and Z directions for 2 hours each
	Shock resistance	300 m/s ² acceleration (30 G approx.) in X, Y and Z directions for 3 times each
Material		Enclosure: Aluminium, Mounting bracket: Stainless Steel Mirror (rear surface mirror): Glass, Side cover: EPDM
Accessories		Intermediate supporting bracket RF-SFBH-40/48/56/64: 1 set RF-SFBH-72/80/88/96: 2 sets

PRECAUTIONS FOR PROPER USE

- Be sure to carry out maintenance while referring to the instruction manual for the SF4B / SF2B series of light curtains.
- Do not use if dirt, water, or oil, etc. is attached to the reflective surface of this product. Appropriate sensing range may not be maintained due to diffusion of refraction.
- Make sure that you have read the instruction manual for the corner mirror thoroughly before setting up the corner mirrors and light curtains, and follow the instructions given. If the equipment is not set up correctly as stipulated in the instruction manual, incident light errors may result in unexpected situations which may result in serious injury or death.
- Instruction manual can be downloaded from the website: <http://www.sunx.jp/>
- The SF4B / SF2B series of light curtains cannot be used as retroreflective type when this corner mirror is used.
- The reflective surface part of this product is made of glass. Note that if it is broken, the glass shards may fly apart.

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from the website: <http://www.sunx.jp/>

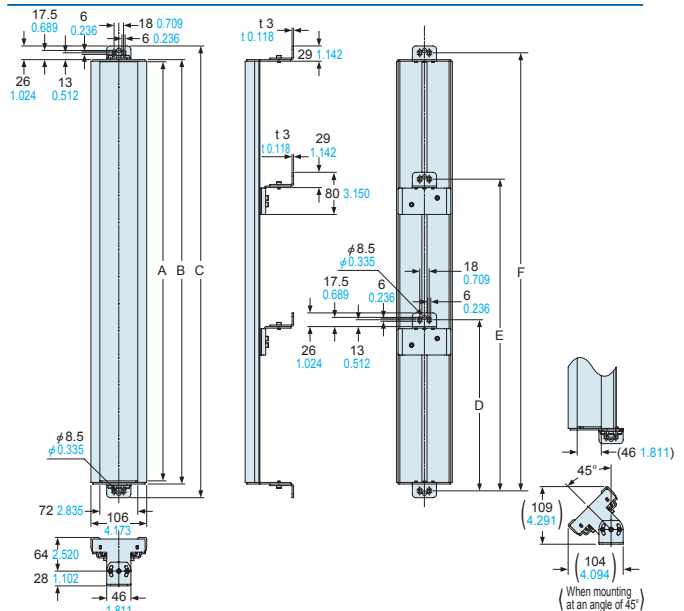

Model No.	A	B	C	D	E	F	Net Weight
RF-SFBH-8	173 6.811	183 7.205	235 9.252	-	-	209 8.228	810 g approx.
RF-SFBH-12	236 9.291	246 9.685	298 11.732	-	-	272 10.709	970 g approx.
RF-SFBH-16	316 12.441	326 12.835	378 14.882	-	-	352 13.858	1,170 g approx.
RF-SFBH-20	396 15.591	406 15.984	458 18.031	-	-	432 17.008	1,370 g approx.
RF-SFBH-24	476 18.740	486 19.134	538 21.181	-	-	512 20.157	1,570 g approx.
RF-SFBH-28	556 21.890	566 22.283	618 24.331	-	-	592 23.307	1,770 g approx.
RF-SFBH-32	636 25.039	646 25.433	698 27.480	-	-	672 26.457	1,970 g approx.
RF-SFBH-36	716 28.189	726 28.583	778 30.630	-	-	752 29.606	2,170 g approx.
RF-SFBH-40	796 31.339	806 31.732	858 33.779	458±50 18.031±1.989	-	832 32.756	2,660 g approx.
RF-SFBH-48	956 37.637	966 38.031	1,018 40.079	538±50 21.181±1.989	-	992 39.055	3,060 g approx.
RF-SFBH-56	1,116 43.937	1,126 44.331	1,178 46.378	618±50 24.331±1.989	-	1,152 45.354	3,460 g approx.
RF-SFBH-64	1,276 50.236	1,286 50.630	1,338 52.677	698±50 27.480±1.989	-	1,312 51.653	3,860 g approx.
RF-SFBH-72	1,436 56.535	1,446 56.929	1,498 58.976	538±50 21.181±1.989	1,018±50 40.079±1.989	1,472 57.953	4,550 g approx.
RF-SFBH-80	1,596 62.835	1,606 63.228	1,658 65.275	591±50 23.268±1.989	1,125±50 44.291±1.989	1,632 64.252	4,950 g approx.
RF-SFBH-88	1,756 69.134	1,766 69.527	1,818 71.575	645±50 25.394±1.989	1,231±50 48.464±1.989	1,792 70.551	5,350 g approx.
RF-SFBH-96	1,916 75.433	1,926 75.827	1,978 77.874	698±50 27.480±1.989	1,338±50 52.677±1.989	1,952 76.850	5,750 g approx.

All information is subject to change without prior notice.



SUNX Limited
2431-1 Ushiyama-cho, Kasugai-shi, Aichi,
486-0901, Japan
Phone: +81-(0)568-33-7211
FAX: +81-(0)568-33-2631

Overseas Sales Dept.
Phone: +81-(0)568-33-7861
FAX: +81-(0)568-33-8591

<http://www.sunx.jp/>

Printed on 100% recycled paper PRINTED IN JAPAN

Ramco Innovations | www.ramcoi.com | 800-328-6236 | nsales@ramcoi.com

No.LCE-RFSFBH-5 July, 2007