

EC-G02

Related Information

■ General terms and conditions..... F-7

■ Selection guide P.1157~


■ Glossary of terms..... P.1497

■ General precautions P.1501


panasonic.net/id/pidsx/global

Air-gun type ionizer that can remove dust in a single burst using pulsed air

Direct ionized air emission

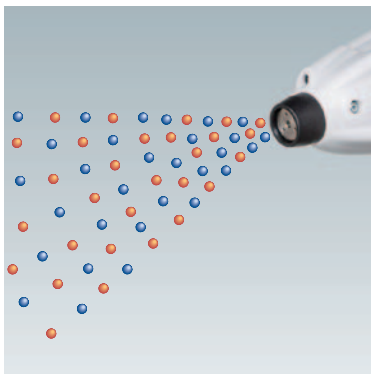

Direct emission of ionized air removes electrification on charged object swiftly.

Pulse ionized air



Instant pulse air emission with high air pressure removes dust all at once.

White LED illumination



The white LED illuminates on the target object.

External input incorporated

External input allows the tool to be used in conjunction with other equipment such as a foot switch.

Oil-free compatible

All components on the air path (air outlet, solenoid valve, joint, etc.) are suitable for use in oil-free environments.

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSLIGHT CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN MACHINE
INTERFACESENERGY CONSUMPTION
VISUALIZATION
COMPONENTS

FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideStatic
Removers


Cleaning Box

Pulse Air-gun

Electrostatic
Sensor

EC-G02

ORDER GUIDE

Type	Appearance	Charge removal time ($\pm 1,000$ V \rightarrow ± 100 V)	Model No.
Gun type		0.5 sec. approx. (Note)	EC-G02

Note: Typical value for pulse air mode: CONT at 100 mm **3.937 in** from the front of discharge nozzle at an applied air pressure of 0.50 MPa.

SPECIFICATIONS

Type	Gun type
Item	Model No.
Charge removal time	0.5 sec. or less approx. ($\pm 1,000$ V \rightarrow ± 100 V) (Note 2)
Applicable fluid	Air (dried clean air) (Note 3)
Supplied air flow	300 l/min. (ANR) or less
Air pressure range	0.05 to 0.50 MPa
Supply voltage	Accessory AC adapter INPUT: 100 to 240 V AC ± 10 % 50/60 Hz (OUTPUT: 24 V DC)
Power consumption	30 VA or less
Discharge method	High-frequency AC method
Pulse air mode	Pulse 1 (long) / Pulse 2 (short) / CONT (continuous) selectable by switch
LED illumination mode	ON (always ON) / SYNC (synchronized with trigger) / OFF (always OFF)
External input	Ionized air emission operation ON / OFF using OR control with trigger switch Ionized air emission operation ON: Short-circuited to COM (-) Ionized air emission operation OFF: Open
Ambient temperature	0 to +50 °C +32 to +122 °F (No dew condensation), AC adapter: 0 to +40 °C +32 to +104 °F
Ambient humidity	35 to 65 % RH (No dew condensation)
Weight	270 g approx. (main unit only)
Accessories	<ul style="list-style-type: none"> AC adapter: 1 pc. Exclusive intermediate cable (oil-resistant, heat-resistant, flexible type) length 2m 6.562 ft: 1 pc. Straight joints <ul style="list-style-type: none"> Tube outer diameter $\varnothing 8$-$\varnothing 8$mm $\varnothing 0.315$-$\varnothing 0.315$ in compatible type: 1 pc. (Note 4) Tube outer diameter $\varnothing 8$-$\varnothing 6$mm $\varnothing 0.315$-$\varnothing 0.236$ in compatible type: 1 pc. Connector connection terminal (Manufactured by Molex): 3 pcs.

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.

2) Typical value for pulse air mode: CONT at 100 mm **3.937 in** from the front of discharge nozzle at an applied air pressure of 0.50 MPa.

3) Dried clean air is the air passing through air dryer (dew point -20 °C **-4 °F** approx.) and air filter (mesh size 0.01 μ m **0.0004 mil** approx.)

4) At the time of shipment from the factory, $\varnothing 8$ - $\varnothing 8$ mm **$\varnothing 0.315$ - $\varnothing 0.315$ in** type is attached.

PRECAUTIONS FOR PROPER USE

- This product includes precision components, so do not drop it or hit it against other objects. If this is not observed, accidents or problems with operation may occur.
- Never use this product in a device for personnel protection.
- Do not use this product in places where there may be danger of flammable or combustible items being present.
- High voltages are applied to the discharge needle, so never touch the discharge needle while the power for the product is turned on, otherwise electric shocks may result.
- Since the tip of the discharge needle is sharp, take sufficient care in handling the discharge needle, or injuries may result.
- If this product is used in an airtight room, ozone emitted from this product may be detrimental. Therefore, in order for this product to be used in an airtight room, be sure to keep the room ventilated.
- Do not direct ionized air toward the face. Ozone may cause irritation to places such as the nose and throat.
- Do not look directly into the white LED spotlight. It may cause injury to the eyes.

OPTIONS

Designation	Model No.	Description
Discharge needle	EC-GANT	For replacement (1 pc.)
Solenoid valve	EC-GAV	For replacement (1 pc.)

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS


FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.

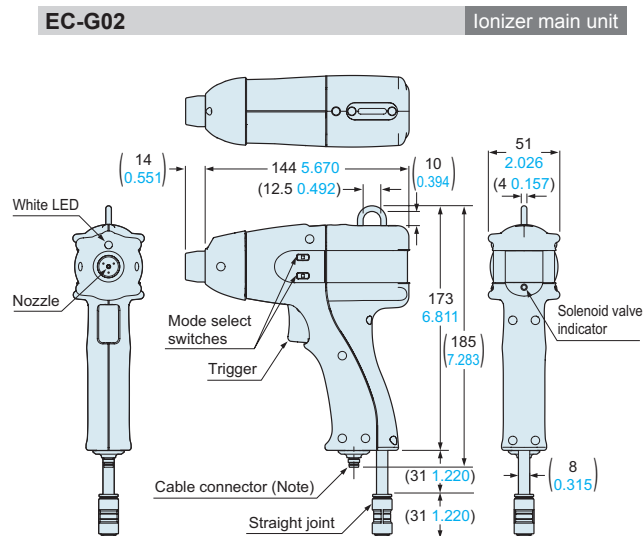

Note: An exclusive intermediate cable (oil-resistant, heat-resistant, flexible type, $\varnothing 3.7$ mm **$\varnothing 0.146$ in**, 2 m **6.562 ft** long) is attached.

Selection Guide

Static Removers

Cleaning Box

Pulse Air-gun

Electrostatic Sensor

EC-G02