

# Universal voltage type that allows selection of connection types


- Longest in class Sensing distance: 70 m
- Uses a red LED for the light source. Easy adjustment of light axis even over long distances
- Universal voltage types are available as terminal block types and cable types
  - DC power types are also available as connector types

Related products







#### **Protrusion detection in** automated warehouses



Automobile door detection



Vehicle stop position detection



#### Selection table

Туре		Shape	Sensing distance	Connection type	Model
Universal voltage	Through- beam		70 m	Terminal block type	V4T-7000
				Cable type	V3T-7000
	Retro- reflective		0.01 to 12 m	Terminal block type	V4R-1200
				Cable type	V3R-1200
	Diffuse- reflective		0.01 to 2 m	Terminal block type	V4D-200
				Cable type	V3D-200

	Time	Shape	Sensing distance	Connection type	Model	
	Туре	Snape			NPN type	PNP type
	Through- beam		70 m	Terminal block type	V4T-7000N	V4T-7000P
				Cable type	V3T-7000N	V3T-7000P
				Connector type	V3T-7000CN	V3T-7000CP
ē	Retro- reflective		0.01 to 12 m	Terminal block type	V4R-1200N	V4R-1200P
DC power				Cable type	V3R-1200N	V3R-1200P
0				Connector type	V3R-1200CN	V3R-1200CP
	Diffuse- reflective		0.01 to 2 m	Terminal block type	V4D-200N	V4D-200P
				Cable type	V3D-200N	V3D-200P
				Connector type	V3D-200CN	V3D-200CP

• For the connector type, please purchase an optional DOL-1204-G02M connector cable.

# **Options/Accessories**

Reflector Standard (included)





Connector cable Straight

DOL-1204-G02M M12, 4-pin connector cable Cable length: 2 m \*5 m and 10 m cables are separately available.



Laser Displacement Sensors

Universal Voltage

٧2

V3, V4


V

# **Features**


#### Longest in class Sensing distance: 70 m

Achieves 70 m sensing distance as a through-beam type. Expanded long range detection applications.

Conventional models



V3T-7000□. V4T-7000□

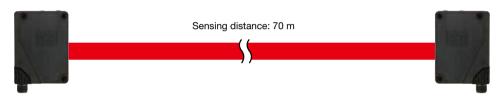

Easy adjustment of light axis

# **Employs red LED for light source (all models)**

Uses a red LED for the light source for which light axis adjustments are possible even over long distances. Makes it possible to save time on installation. Also possible to see the detection point in the case of short distances.



Terminal block type / Cable type / Connector type (DC power types only)

## Possible to select from three connection types

Three types are available: A terminal block type which allows the connection of various cables, a cable type which doesn't require the separate preparation of cables, and a connector type which doesn't require rewiring when changing sensors. Select the most suitable model. (Connector type is for DC power types only)

Terminal block type











# Photoelectric Sensors

#### Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Universal Voltage

V2

V3, V4


# **Specifications**


Туре			Universal voltage type				
			Through-beam type	rough-beam type Retro-reflective type			
Moc	Terminal block ty	/ре	V4T-7000	V4R-1200	V4D-200		
IVIOC	Cable type		V3T-7000	V3R-1200	V3D-200		
Sensing distance			70 m	0.01 to 12 m <sup>-1</sup>	0.01 to 2 m <sup>-2</sup>		
Light source			Red LED				
Response time			15 ms or less				
Hysteresis			_ 20% or less				
Distance adjustment			1-turn potentiometer				
Indicators			Output indicator: orange LED, Stability indicator: green LED				
Control output			Relay × 1C <sup>-3</sup> 240 VAC / 30 VDC, 3 A or less (load resistance)				
Output mode			Fixed to Light ON				
Con	nection type		Terminal block type: Applicable cable outer diameter: ø4 to 8, Cable type: Cable length: 2 m, ø6.3				
Rating	Supply voltage		24 to 240 VDC ±10%, 24 to 240 VAC ±10% 50/60 Hz				
Rat	Power consumption		4 VA or less 2.5 VA or less				
Applicable regulations			EMC directive (2004/108/EC), Low voltage directive (2006/95/EC)				
Applicable standards			EN 60947-5-2				
Company standards			Noise resistance: Feilen Level 3 cleared				
ਕ	Ambient temperature/humidity		-25 to +55°C (no freezing) / 35 to 85% RH (no condensation)				
nent nce	Ambient illuminance		Sunlight: 10,000 lx or less, Incandescent lamp: 3,000 lx or less				
vironment	Vibration resistance		10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions				
Environmental resistance	Shock resistance		Approx. 50 G (500 m/s²); 3 times in each of the X, Y, and Z directions				
ш	Degree of protection		IP67				
Material			Housing: ABS (glass fiber filled, fire resistant), Front cover: Polycarbonate (retro-reflective type is PMMA)				
Weight without cable			Through-beam type emitter: Approx. 70 g Other: Approx. 85 g				
Included accessories			Mounting bracket	Mounting bracket Reflector: V-61	Mounting bracket		

<sup>\*1.</sup> With the V-61 reflector \*2. Using a 200  $\times$  200 mm white sheet of paper.

- Specifications are subject to change without prior notice for product improvement purposes.
- Products certified for the Chinese CCC compulsory certification system also available. Contact us for details.

# **Output circuit diagram**

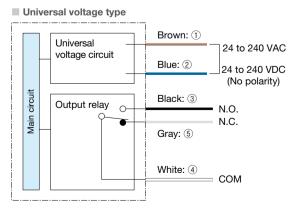

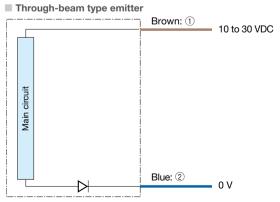

\*For the universal voltage type, add 24 to 240 VAC / VDC to the brown wire and blue wire. (No polarity)



<sup>\*3.</sup> When driving the inductive load (with an induction valve, electromagnetic contactor, etc.) through the relay connection point, please use a noise absorption device (surge absorber).

Laser Displacement Sensors

> Universal Voltage

> > V2

V3, V4


V

Time			DC power type				
	Туре		Through-beam type Retro-reflective typ		e Diffuse-reflective type		
	NPN	Terminal block type	V4T-7000N	V4R-1200N	V4D-200N		
		Cable type	V3T-7000N	V3R-1200N	V3D-200N		
		Connector type	V3T-7000CN	V3R-1200CN	V3D-200CN		
Mode	PNP	Terminal block type	V4T-7000P	V4R-1200P	V4D-200P		
		Cable type	V3T-7000P	V3R-1200P	V3D-200P		
		Connector type	V3T-7000CP	V3R-1200CP	V3D-200CP		
Sensing distance		nce	70 m	0.01 to 12 m <sup>-1</sup>	0.01 to 2 m <sup>-2</sup>		
Light	source		Red LED				
Response time			0.5 ms or less				
Hyste	resis		_ 20% or less				
Distance adjustment			1-turn potentiometer				
Indica	itors		Output indicator: orange LED, Stability indicator: green LED				
Contr	ol outpu	t	NPN/PNP type Open collector Max. 100 mA/30 VDC				
Outpu	ıt mode		Light ON / Dark ON selection switch				
Connection type		/pe	Terminal block type: Applicable cable outer diameter: ø4 to 8, Cable type: Cable length: 2 m, ø3.8, Connector type: M12, 4-pin				
Rating	Supply v	voltage	10 to 30 VDC, including 10% ripple (p-p)				
Rat	Power consumption		35 mA or less				
Applio	cable req	gulations	EMC directive (2004/108/EC)				
Applio	cable sta	andards	EN 60947-5-2				
Comp	any sta	ndards	Noise resistance: Feilen Level 3 cleared				
<u>a</u>	Ambient temperature/humidity		-25 to +55°C (no freezing) / 35 to 85% RH (no condensation)				
Jent Jent	Ambient illuminance		Sunlight: 10,000 lx or less, Incandescent lamp: 3,000 lx or less				
resistance	Vibration resistance		10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions				
resi	Shock re	esistance	Approx. 50 G (500 m/s²); 3 times in each of the X, Y, and Z directions				
<u> </u>	Degree of protection		IP67				
Material			Housing: ABS (glass fiber filled, fire resistant), Front cover: Polycarbonate (retro-reflective type is PMMA)				
Weight without cable		ıt cable	Through-beam type emitter: Approx. 70 g Other: Approx. 85 g				
Includ	led acce	essories	Mounting bracket	ing bracket Mounting bracket Reflector: V-61 Mounting bracket			

- \*1. With the V-61 reflector \*2. Using a  $200 \times 200$  mm white sheet of paper.
- Specifications are subject to change without prior notice for product improvement purposes.

# **Output circuit diagram**

#### ■ NPN output type

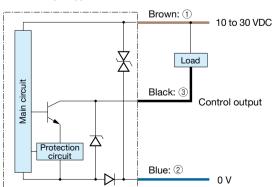

#### ■ Connector type

(Pin configuration) Sensor side Connector cable side





1 10 to 30 VDC 2 0V 3 Control output

- Connecting
- ① to ④ are connector pin No.

#### Notes

- When using a switching regulator for the power supply, be sure to ground the frame ground terminal.
- Avoid wiring in parallel with or in the same piping as high-voltage wires or power lines. Doing so may lead to malfunctions caused by noise. Also, shorten the power supply and signal wires as much as possible.
- Avoid using the transient state while the power is on (approx. 100 ms).

# Dimensions

Sensor (Unit: mm)

■ Terminal block type

Light ON / Dark ON selection switch (equipped on DC power type)

Output indicator (orange)

Stability indicator (green)

Distance adjustment

Photoelectric Sensors


Specialized Photoelectric Sensors

Laser Displacement Sensors

Universal Voltage

V2

V3, V4

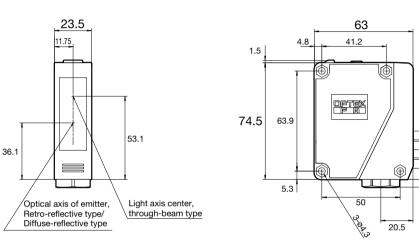


Light ON / Dark ON selection switch


(equipped on DC power type)

Output indicator (orange)

Stability indicator (green)

Distance adjustment

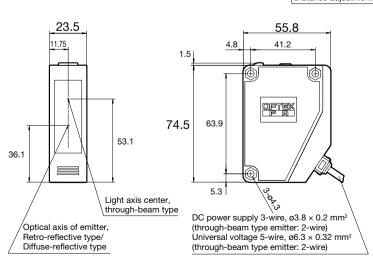



19

5

(Unit: mm)

Specialized Photoelectric Sensors


Laser Displacement Sensors


Universal Voltage


> V2 V3, V4

### **Mounting bracket**

■ Floor-mounted









#### **Mounting bracket**

■ Wall-mounted

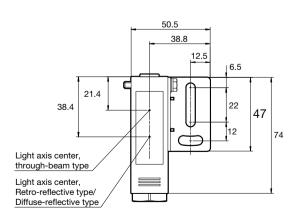

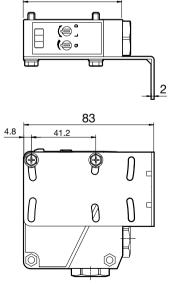


Terminal block type: 63


Cable/Connector type: 55.8


# Dimensions


Reflector (Unit:mm)

■ V-61: Standard type reflector (included with retro-reflective type) ■ V-42: Small reflector (optional)









Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors


Universal Voltage

٧2

V3, V4

Connector cable (optional)

■ DOL-1204-G02M

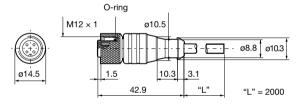

Cable section material: PVC, Conductor cross-section: 4-wire × 0.25 mm<sup>2</sup>

Laser Displacement Sensors

Universal Voltage


V2 V3, V4


V


# Typical characteristic data


\*Contact us for any other characteristic data that may be required.

#### V3T-7000 / V4T-7000













#### V3R-1200□/V4R-1200□









#### V3D-200□/V4D-200□

